

April 1986

# RADiO COMmunication

Peter Hart, G3SJX takes the lid off  
the new Tek TVVF50c

See the Bulletin pages

Journal of the Radio Society of Great Britain



# EUROPE'S No. 1 . . . **AMCOMM-ARE**

Where a good deal more costs a good deal less . . .



Call or telephone  
01-992 5765 for latest  
prices and information  
plus full range of I.F.  
equipment and  
accessories.

IC 745



IC 751

- Two year guarantee all major products
- Absolutely free finance
- Most mail order post free
- All securicor items carriage free
- Negotiable guarantees
- Factory appointed distributors with access to engineering
- Next day delivery
- Massive stocks of spares and various 'bits and pieces'
- Dedication to total service
- Door to door repair service free under guarantee

FT 757 **YAESU**



Telephone 01-992 5765  
for latest information on  
the YAESU value for  
money high performance  
equipment. Full range of  
accessories available.

FT 980



IC 02



IC 04 E



IC 2 E



IC 4 E



Four exciting  
hand helds  
from ICOM for  
you to come  
and try . . . or  
call 01-992  
5765 and we'll  
send you the  
proof.

## TOKYO H.P. LABS

This range of highly  
engineered linear  
amplifiers and antenna  
couplers is fast  
becoming everyone's  
number one choice.

### NEW AMCOMM 9000

— Available now — carriage  
paid £89 inc. VAT. A new  
general coverage 1.8-30  
MHz. Antenna coupler rated  
at 300W P.E.P. max.  
Suitable for balanced  
feeders, coaxial input and  
random wire.



Voted the  
world's number  
one range of  
hand helds by  
the experts,  
available now  
from stock —  
or ask for  
literature.  
Telephone  
01-992 5765



FT 209 RII



FT 209 R



FT 703 R



FT 709 R

## B.N.O.S. LINEARS

|                  |        |                  |        |
|------------------|--------|------------------|--------|
| L.P.M 144-1-100  | 181.00 | L.P.144-3-50     | 108.00 |
| L.P.M 144-3-100  | 181.00 | L.P.144-10-50    | 108.00 |
| L.P.M 144-10-100 | 157.00 | L.P.M 432-1-50   | 235.00 |
| L.P.M 144-25-160 | 217.00 | L.P.M 432-3-50   | 235.00 |
| L.P.M 144-3-180  | 247.00 | L.P.M 432-10-50  | 195.00 |
| L.P.M 144-10-180 | 247.00 | L.P.M 432-10-100 | 335.00 |

Complete range in stock

## MUTEK

|            |        |            |        |
|------------|--------|------------|--------|
| SLNA 50    | 44.90  | SBLA 144c  | 89.90  |
| SLNA 144s  | 39.95  | RPCB 271ub | 89.90  |
| SLNA 145sb | 29.90  | TVIIF 230c | 334.90 |
| GLNA 432c  | 149.90 | LBPF 144v  | 22.40  |
| RPCB 144ub | 79.90  | LBPF 432u  | 22.40  |
| RPCB 251ub | 84.90  | TVVF 50c   | 199.90 |
| BBA 500u   | 34.90  | GLNA 433c  | 79.90  |
| GFBA 144c  | 149.90 | TVVF 144a  | 239.90 |

Complete range in stock

## ANTENNAS & ROTORS

A WIDE RANGE OF ANTENNAS AND  
ROTORS FOR ALL APPLICATIONS  
FROM HIRSCHMANN 250 TO THE  
FAMOUS 'TAIL TWISTER'. ANTENNAS  
FROM JAYBEAM, TONNA, HIGH  
GAIN, M.E.T., ETC. — FAST  
DELIVERY ANYWHERE!!!

**OUR BIG  
BUYING POWER  
GUARANTEES YOU  
EUROPE'S No. 1 DEAL  
ALL ROUND. SEND 90p  
FOR OUR BUMPER  
LITERATURE  
PACK!**

**AMCOMM-ARE  
— WHERE A  
GOOD DEAL MORE  
COSTS A GOOD  
DEAL LESS!!!**




ICOM 7000 £849

Prices subject to currency  
fluctuations. E. & O.E. excepted.



FRG-9600 £499



AR 2002 £425

DON'T FORGET OUR OTHER  
MAIL ORDER AD—PAGE 239

**AMCOMM-ARE**

373 Uxbridge Road, London W3 9RN. Tel: 01-992 5765/6. Telex: 24263

APRIL 1986

VOLUME 62 No 4

# RADIo COMMunication

## EDITOR

A W Hutchinson

## Editorial assistant

Miss S J Smith

## Draughtsman

D E Cole

## Editorial secretary

Mrs A M Celand

All contributions and correspondence concerning the content of *Radio Communication* should be addressed to:

The Editor, RSGB,  
88 Broomfield Road,  
Chelmsford,  
Essex CM1 1SS

Tel 0245 84938

Office hours: 0915 to 1715

## ADVERTISING

Advertisements, other than Members' Ads, should be sent to:

M J Hawkins, G3ZNI,  
RSGB Advertisement Officer,  
PO Box 599,  
Cobham,  
Surrey KT11 2OE

Tel 037 284 3955

Prestel 372843955

## EDITORIAL BOARD

D A Evans, G3OUF

A W Hutchinson

D S Evans, G3RPE

Correspondence concerning the *RSGB News Bulletin* (including Members' Ads), the distribution of the journal, and all other Society matters should be addressed to:

RSGB Headquarters,  
Lambda House,  
Cranborne Road,  
Potters Bar,  
Herts EN6 3JE

Tel 0707 59015

Business hours: 1000 to 1600

## Headline News

Tel 0707 59312 for a recording of the latest amateur radio news

RSGB Data Box (Prestel compatible)

Tel 0707 52242

## CONTENTS

- 243 Editorial—The amateur and the government
- 244 Amateur Radio News
- 249 Members' Mailbag
- 250 The G4BWE cw memory, Mk 2—Steve Price, G4BWE
- 256 A linear amplifier unit for the hf band transceiver (Part 2)—Lorin Knight, M1EE, G2DXK
- 260 A 50MHz receive/transmit converter—D S Jones, GW3XYW
- 264 Technical Topics—Pat Hawker, G3VA
- 269 News & Views
  - HF—John Allaway, G3FKM
- 272 SWL—Bob Treacher, BR532525
- 273 Computing—John Morris, GM4ANB
- 274 Satellites—Bob Phillips, G4IQQ
- 275 Microwave—Mike Dixon, G3PFR
- 276 Data Comms—Ian Wade, G3NRW
- 277 VHF—Ken Willis, G8VR
- 280 Contest News
- 283 Contests calendar
- 284 Club News


Technical articles on subjects of amateur interest are always welcome and should be sent to: The Editor, *Radio Communication*, 88 Broomfield Road, Chelmsford, Essex CM1 1SS.

All articles received are reviewed for technical merit by the RSGB Technical & Publications Committee, or an acknowledged expert on the subject, before acceptance. Payment at high competitive rates will be made for all articles published.

A contribution will only be considered for publication on the understanding that the person submitting it is the original author and owner of the whole copyright, and that on acceptance for publication such copyright will become the property of the RSGB in consideration of the above-mentioned payment by the RSGB to the contributor.

The editor will be pleased to send intending authors a manuscript preparation guide and to give any other advice and assistance requested.

*Radio Communication* is published by the Radio Society of Great Britain as its official journal on the first Friday of each month and is sent free and post paid to all members of the Society



36,244 copies per  
issue average  
circulation in 1985

Closing date for contributions  
unless otherwise notified:  
five weeks before publication date

© RADIO SOCIETY OF  
GREAT BRITAIN 1986

# Lowe shops and approved dealers.

**Sole Distributor Lowe Electronics Ltd.**  
Cheslerfield Road, Matlock Derbyshire DE4 5LE.  
Tel: 0629 2817, 2430, 4057, 4995.

**London Lowe Electronics Ltd.**  
223/225 Field End Road, Eastcote, Middx.  
Tel: 01-429 3256.

**Glasgow Lowe Electronics Ltd.**  
4/5 Queen Margaret Rd, off Queen Margaret Drive,  
Glasgow. Tel: 041-945 2626.

**The North East Lowe Electronics Ltd.**  
56 North Road, Darlington, Durham.  
Tel: 0325 486121.

**Cambridge Lowe Electronics Ltd.**  
162 High Street, Chesterton, Cambridge.  
Tel: 0223 311230.

**Cardiff Lowe Electronics Ltd.**  
c/o South Wales Carpets,  
98 Clifton Street, Cardiff.  
Tel: 0222 464154.

**Harris/Dorsel Lowe Electronics Ltd.**  
27 Gillam Road, Northbourne, Bourne, Lincs.  
Tel: 0202 577760.

**Birmingham Ward Electronics**  
422 Bromford Lane, Ward End, Birmingham B8 2RX.  
Tel: 021-328 6070.

**Buckinghamshire Photo Acoustics Ltd.**  
58 High Street, Newport Pagnell, Bucks.  
Tel: 0908 610625.

**East Scotland Jaycee Electronics**  
20 Woodside Way, Glanzelhas, rife KY7 SDE.  
Tel: 0592 756962.

**Essex Writers & Sinnen Electronics**  
Warren House, 18-20 Main Road, Hockley, Essex.  
Tel: 0702 206835.

**Essex Arrow Electronics Ltd.**  
5 The Street, Hatfield Peverel, N. Chelmsford.  
Tel: 0245 381673.

**Lancashire Stephens-James Ltd.**  
47 Warrington Road, Leigh.  
Tel: 0942 676790.

**North London Radio Shack Ltd.**  
188 Broadhurst Gardens, London NW6 3AY.  
Tel: 01-624 7174.

**West Midlands Dewsbury Electronics**  
176 Lower High Street, Stourbridge.  
Tel: 0384 390063.

**W. Sussex Broadhurst Electronics**  
High Street, Handcross, Haywards Heath, W. Sussex.  
Tel: 0444 400786.

**Northern Ireland George Moore Electronics**  
7 Cyprus Avenue, Belfast B5.  
Tel: Belfast 658295.

**Deven Reg Ward & Co Ltd.**  
1 Western Parade, Axminster, Deven.  
Tel: 0297 34918.

**W. Yorkshire Amateur Radio Shop**  
2/4 Cross Church Street, Huddersfield.  
Tel: 0484 20774.

**Kenil Thame Electronics Ltd.**  
2 Stanley Road, Herne Bay, Kent.  
Tel: 02273 63859.

# the **NEW** TRIO TS440S amateur bands transceiver plus general coverage receiver.



With the advent of the TRIO TS440S, the compact HF transceiver that we have known since the late seventies, has taken a major step forward. The new transceiver has provision for fitting an internal aerial tuning unit operating between 3.5 and 28 MHz. A front panel numeric keypad makes frequency selection and subsequent entry to one of the hundred memory channels or two VFO's a simple operation and, of course, frequencies can be quickly selected from memory and transferred to either VFO. The TS440S is also an excellent general coverage receiver tuning from 100 kHz to 30 MHz. Combined with TRIO's now well-known attention to ergonomics, the performance and facilities of the TRIO TS440S make this the transceiver for your shack.

The TRIO TS440S operates from 13.8 volts DC. 20 amps. Input power is 250 watts pep on all modes throughout the band except on AM where it is 110 watts. When using the TRIO PS50 power supply unit transmission time at full output with the TS440S transceiver can be up to one hour in any mode.

Operating on USB, LSB, AM, FM and AFSK the TRIO TS440S has full and semi break-in on CW. Rapid transmit/receive switching also makes the TS440S suitable for AMTOR use. FM is fitted as standard to the transceiver as is squelch which operates on all modes. Bandwidth selection manual or automatic. When the bandwidth switch is in the auto position the rig selects the IF bandwidth to match the mode. Of course, the rig's selection can be overridden. The TS440S has provision for four different bandwidths. The W (AM) and M2 (SSB) positions are fitted with 6kHz and 2.4kHz 455kHz ceramic filters, the M1 and N positions are for optional filters, eg. 500 or 250Hz CW (YK88C or YK88CN) in position N and a 1.8 kHz narrow SSB filter (YK88SN) in position M1. Alternatively a 2.4 kHz (YK88S) filter can be fitted in the M1 position resulting in an even better filter shape for SSB use. The TRIO TS440S has two switchable rates of AGC, fast or slow.

Careful appraisal of operating techniques has enabled TRIO to provide the TS440S with a comprehensive system of memories, search and scanning modes and keyboard frequency entry.

The two VFO's, A and B can be used individually or when used together in split mode, for cross band and even cross mode contacts. Normally used on the same band, the system provides the same flexibility as if the operator were using a separate VFO and is ideal for DX working. Whilst listening in split mode, the transmit frequency of the other VFO can quickly be checked by pressing the front panel switch, T-F

SET. A front panel control, A=B instantly puts the "idle" VFO on the frequency of the VFO in use.

- The desired operating frequency can be arrived at by use of the tuning knob and megahertz up/down switches. On the TS440S frequencies can also be entered by means of a front panel numeric keypad.
- One hundred memory channels are available, each storing frequency and mode. Frequencies can be entered into any selected memory channel from either of the VFO's or by using the keypad, memories 0 to 89 are simplex, memories 90 to 99 hold split frequencies. Both frequency and mode can easily be transferred from memory to either VFO. When transferring a split memory channel (90 to 99) the receive frequency is entered into VFO A and the transmit frequency into VFO B. Memories are scanned in banks of ten, eg. 20 to 29, 40 to 49, 70 to 79 etc.
- Two search ranges are available, the frequency limits being user programmable. Two rates of scan can be set when in search mode.
- When set to memory channel instead of VFO, the entire contents of the one hundred memories can be swiftly reviewed by using the main tuning knob, the megahertz up/down switches on the front panel or the up/down buttons of the microphone.

Rapid selection of the required amateur bands is achieved by means of the front panel up/down switches. Alternatively the switches can be preset to step in megahertz units.

The TRIO TS440S is fitted with a speech processor which can be switched on to enhance transmitted audio when working DX. To improve receive audio the transceiver has both notch filter and IF shift.

An optional computer interface (IF232C) is available for the transceiver.

For the blind operator the TRIO TS440S is ideal. When fitted with the VSI board (optional), a digitally encoded girl's voice will announce on request the operating frequency and as each mode is selected a tone gives the appropriate morse letter (F for FM, U for USB, etc).

With the TS440S, TRIO have produced a transceiver that combines excellent performance with unparalleled operating facilities in an extremely compact package. The result is a transceiver suitable for mobile and portable use as well as the shack.

TS440S .. .. £190.00 inc VAT carriage £7.00.  
AT400 .. .. £125.00 inc VAT carriage £7.00.  
PS50 .. .. £192.60 inc VAT carriage £7.00.

## TRIO-KENWOOD CORPORATION

Shionogi, Shibuya Building, 17-5, 2-chome Shibuya, Shibuya-ku, Tokyo 150, Japan

### TRIO-KENWOOD COMMUNICATIONS

Division of Trio-Kenwood Electronics GmbH

Rembrücker Street 15, D-6056 Heusenstamm, West Germany

## vhf/uhf fm transceivers

### TW4000A FM VHF/UHF dual band transceiver

To have both 70 centimetres and 2 metres available in one mobile transceiver has been a desire of the VHF/UHF enthusiast for many years. TRIO with the TW4000A have satisfied that need. The transceiver is well known for having an excellent receiver and as those who already own and operate one know, is a delight to use. Compact and producing 25 Watts on both bands, the TW4000A is the enthusiast's natural choice.



TW4000A . . . £580.34 inc VAT, carriage £7.00

### TR7930 2 metre FM mobile/base station transceiver

A mobile FM transceiver that also doubles as a piece of shack equipment. Producing 25 Watts and having 21 memories, priority alert, full repeater facilities including reverse repeater, programmable band scan, memory scan and keyboard frequency entry, the TR7930 is ideal for mobile operation using the programmed memories, yet is suitable for shack use with the front panel keyboard.



TR7930 . . . £365.60 inc VAT, carriage £7.00

### TM201A and TM401A 2 metre and 70 centimetre mobile FM transceivers

Accepting the fact that there is little space in a modern car for anything other than a radio/cassette unit, TRIO have with the TM201A and TM401A produced the definitive compact transceiver. By removing the speaker and making this separate, TRIO have given you excellent receive audio quality. The TM201A and its 70 centimetre version, the TM401A are ideal for the amateur who wants a high performance rig with ease of operation.



TM201A . . . £296.09 inc VAT, carriage £7.00  
TM401A . . . £350.91 inc VAT, carriage £7.00

### TM211E and TM411E FM VHF and UHF mobile transceivers

By taking the popular TM201A and TM401A and adding DCS and a tiltable front panel, TRIO have produced higher specification transceivers. Even easier to fit in tight locations, the TM211E and TM411E are transceivers designed to cope with today's crowded bands.



TM211E . . . £398.00 inc VAT, carriage £7.00  
TM411E . . . £466.18 inc VAT, carriage £7.00

## send for the TRIO general catalogue

All advertised prices subject to exchange rate variation

## LOWE ELECTRONICS LTD.

Chesterfield Road, Matlock, Derbyshire DE4 5LE

Telephone 0629 2817, 2430, 4057, 4995.

## 6 metre equipment

**TS670** An all mode (FM optional) four band base station transceiver covering 6, 10, 15 and 40 metres. 13.8 volt DC operation/10 watts output. Also available for the TS670 is a general coverage receiver unit covering 500kHz to 30MHz.

**TS670** £774.13 inc vat, carriage £7.00.

**FM430** FM board £45.00 inc vat, carriage £1.00

**GC10** Receiver board £58.75 inc vat, carriage £1.50


**TR9300** Simply a 6 metre version of the well known 2 metre TR9130. 10 watts out, 13.8 volt DC operation.

**TR9300** £590.49 inc vat, carriage £7.00

## general coverage receiver

### R2000 general coverage receiver

The R2000 general coverage receiver from TRIO covers the frequencies from 150KHz to 30MHz. Modes of operation are AM, USB, LSB, CW and FM. For convenience the R2000 has ten memories, each of which holding frequency and mode information. Memory scan and programmable scan between user designated limits are also included. Provision has been made for an optional internal VHF converter covering from 118 to 174MHz. Operating from either mains or 12V DC the TRIO R2000 is an ideal way to listen to the world.



R2000 . . . £518.79 inc VAT, carriage £7.00

VC10 VHF converter 118 to 174MHz . . . £139.01 inc VAT, carriage £2.50

## station accessories

### TL922 HF amateur band linear amplifier

The TL922 is a class AB2 grounded grid linear amplifier using two high performance 61AC 3-500Z tubes. It covers 160 to 10 metres for SSB, CW and



RTTY modes of operation. Engineering perfection, those who have seen a TL922 will know what I mean. It is one of the few items of amateur radio equipment which is truly hand built by a specialist engineer.



TL922 inc tubes . . . £1265.00 inc VAT, carriage £7.00

### SM220 station monitor

Based on a wide frequency range oscilloscope, the SM220 station monitor features in combination with a built-in two-tone generator, a wide variety of waveform observing capabilities. The SM220 aids efficient station operation as it monitors transmitted waveforms and it also serves as a sensitive wide frequency range oscilloscope for various adjustments and experiments. When fitted with the optional BS8 panoramic display and connected to one of the following transceivers (TS940, TS830, TS180, TS820 series) signal conditions in the vicinity of the receive frequency can be seen over a 40 or 200KHz range.

**SM220** . . . £262.75 inc VAT, carriage £7.00

**BS8** . . . £66.11 inc VAT, carriage £1.50



send £1 for complete mail order catalogue.

## DAIWA meters.

CN410M

CN460M

CNW919

CN630

CN620

CNW419

CN410M. 3.5 to 150MHz cross needle power/SWR meter. Up to 150 Watts.

£53.28 inc VAT, carr. £1.50

CN460M. As above but 140-450MHz. Up to 150 Watts.

£57.73 inc VAT, carr. £1.50

CN620A. 1.8 to 150MHz cross needle power/SWR meter. Up to 1kW.

£73.47 inc VAT, carr. £2.50

CN630. As above but 140-450MHz. Up to 150 Watts.

£108.99 inc VAT, carr. £2.50

NS448. 900 to 1300MHz power/SWR meter. Up to 20 Watts.

£75.00 inc VAT, carr. £2.50

CNW419. 1.8 to 30MHz general coverage aerial tuning unit.


£177.19 inc VAT, carr. £7.00

CNW919. 2 metre power meter and aerial tuning unit.

£116.54 inc VAT, carr. £3.00

NS448

## DAIWA rotators . . . . .

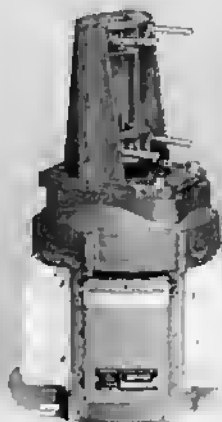

The new range of rotators from DAIWA, the MR series, are designed so that additional motors can be added around a central core, each motor increasing the rotators turn and braking capacity. The MR series will accept up to four motors being initially supplied with one. As the number and size of aerials increases, additional motors can be added, and both turning capacity and braking effort increased.



MR750E  
MR750PE  
MR300E  
LMC  
MR750U  
MR300U

Multitorque rotator (round controller).....£214.13 inc VAT,  
as above but with preset controller.....£241.44 inc VAT,  
Higher speed version with round controller.....£214.13 inc VAT,  
lower mast clamp.....£15.55 inc VAT,  
additional motor for MR750E/PE.....£71.74 inc VAT,  
additional motor for MR300E.....£71.74 inc VAT,

Carriage on rotators £7.00, components £3.00

## NEW from TRIO, a 45 watt fm mobile. . . . .



The TRIO TM2550E is a high power 2 metre FM mobile transceiver.

Power output from the TM2550E is 45 watts. Current drain is approximately 9.5 amps in the high power position (45 watts) and approximately 3 amps in the low power position (5 watts). Low power can be adjusted up to 40 watts. Power requirement for the mobile is 10.5 VDC.

Frequency selection is easy using the backlit front panel keypad. The selected frequency is displayed on a backlit LCD together with

additional operating information, eg priority channel, reverse repeater, simplex or repeater shift etc.

The TM2550E has 23 memory channels into which frequencies are easily written. The TM2550E automatically selects simplex or repeater mode in accordance with the band plan. This function is easily overridden by using the "CS" key.

Scanning operations are divided into keyboard, memory and priority scan. Frequency hold on an occupied channel can be either "time" or "carrier"

operated.

As an option, the TM2550E can be fitted with the DCS system, DCL (Digital Channel Link) enables your rig to automatically QSY to an open channel. The DCL system searches for an open channel (checks the next eleven 25kHz spaced frequencies above a user designated one), remembers it, returns to the original frequency and transmits control information to any other DCL equipped station that switches BOTH rigs to the clear channel.

TM2550.....£399.00 inc vat, carriage £7.00.  
MUI DCL unit.....£26.79 inc vat, carriage £1.00.

## LOWE ELECTRONICS LTD.

Chesterfield Road, Matlock, Derbyshire DE4 5LE

Telephone 0629 2817, 2430, 4057, 4995.

send £1 for complete mail order catalogue.

RADIO COMMUNICATION April 1986



# NEW from the Japan Radio Company, the **NRD525**



The enthusiastic short wave listener knows all too well the excellent performance of the NRD505 and NRD515 general coverage receivers from the JAPAN RADIO COMPANY. Building on the experience gained from the production of these outstanding receivers, JRC introduce a new model, the NRD525, combining advanced performance with the first class construction of the NRD505. The NRD525 is a double superheterodyne receiver having a first IF of 70.45399/70.453MHz and a second of 455kHz. The receiver covers frequencies from 90kHz to 34MHz. An optional internally fitted converter (CMK165) will be available adding the following frequency ranges, 34 to 60MHz, 114 to 174MHz and 423 to 456MHz. Modes of operation for the JRC NRD525 are USB, LSB, CW, AM, FM and RTTY. An optional RTTY demodulator (CMH530) will be available enabling a printer to be directly connected to the receiver. The receiver also has a squelch control which operates on all modes.

The NRD525 has been designed to perform when conditions for reception are far from perfect. To help copy weak signals as a crowded band both notch filter and pass band lining controls are included. The receiver has, as standard, a 3kHz filter for USB and LSB (INTER), a 6kHz filter for AM (WIDE) and in the AUX position on a bandwidth of 12kHz. If an optional filter is placed in the AUX position the 12kHz bandwidth ceases to be available. For CW and RTTY reception the NARR position can be fitted with the optional 500kHz filter (CFL232). In the FM mode (narrow band FM), BANDWIDTH and AGC switches do not function.

The NRD525 is extremely "user friendly" having an easy to use numeric keypad for frequency entry and memory selection. Whether you are entering a full shortwave frequency, Vatican Radio on 6185kHz, or the three digits of Radio Czechoslovakia's long wave transmission on 272kHz, entry is simple, key in the digits as read and press enter. A megahertz only frequency can also be easily entered into the NRD525, simply key in the required number, eg 6 and press the button marked MHz. Switch pads select mode and bandwidth whilst a large heavy knob makes fine tuning a pleasure. A quick tune up or down the band is easily achieved using the up/down pads conveniently located above the tuning knob.

Memory capacity is 200 channels. As well as frequency, each memory holds mode, bandwidth, AGC setting (slow, fast and off) and whether or not the attenuator (approx 20dB) is on or off. Frequencies can be easily transferred from memory to VFO.

The NRD525 has both memory scan and frequency sweep. The receiver can be quickly programmed with the START and END memory channel numbers. Pressing the run button initiates memory channel scan. Operation of frequency sweep is similar, START and END frequencies being entered before commencing sweep.

By pressing numeric key 4, the input RF filters are bypassed or inserted in circuit. When bypassed the display indicates PASS, an excellent feature when receiving very weak signals.

The NRD525 will operate from either 100/120/220/240 volts AC (selectable on back panel) or 13.8 volts DC so making it suitable for use at home or, when out, portable. Add to the above an audio tone control, a tunable BFO for enhanced CW operation, an adjustable level noise blanker, a dimmer switch for the fluorescent display, the ability to connect a high or low impedance aerial and switch between the two, a mute jack socket for use with a separate transmitter and the result is the NRD525 from the JAPAN RADIO COMPANY, a first class receiver purpose built for the dedicated short wave listener.

## Telereader equipment.....



**CWR665E Tx/Rx unit for RTTY/CW/ASCII**  
£858.51 inc VAT, carr. £7.00



**CWR670E Rx unit RTTY/CW/ASCII**  
£498.01 inc VAT, carr. £7.00



**CWR610E Rx unit RTTY/CW/ASCII**  
£216.41 inc VAT, carr. £3.00



**CD660 Rx unit RTTY/CW/ASCII/TOR/AMTOR**  
£257.19 inc VAT, carr. £3.00

HK704

HK709  
HK702  
TX3

EK150

DK210

MX1024

BY2

## KEYS & keyers.

TX3. Morse practice oscillator.  
£11.85 inc VAT, carr. £1.50  
HK709. Straight key.  
£18.09 inc VAT, carr. £2.50  
HK702. Deluxe version on marble base.  
£34.44 inc VAT, carr. £3.00  
HK704. Squeena paddle.  
£17.10 inc VAT, carr. £1.50  
EK150. Electrostatic keyer with built-in sidetone. Solid state or relay keying.  
£114.85 inc VAT, carr. £3.00  
MX1024. Electronic keyer with 1024 bit memory.  
£198.00 inc VAT, carr. £3.00  
DK210. DAIWA electronic keyer. Rolyez paddle.  
£59.93 inc VAT, carr. £2.50

BST1

BENCHER anemometer.  
BY1 Black base, £67.42. BY2 Chrome base, £76.97.  
BY3 Gold plated base, £141.75. VAT inc.  
BENCHER Single Paddle.  
BST1 Black base, £67.42. BST2 Chrome base, £76.97. VAT inc.  
Carriage on BY & BST series, £3.00

## LOWE ELECTRONICS LTD.

Chesterfield Road, Matlock, Derbyshire DE4 5LE

Telephone 0629 2817, 2430, 4057, 4995.

RADIO COMMUNICATION April 1986

send £1 for complete mail order catalogue.



# The Best HF.

## The New ICOM HF Flagship.

### IC-751A



ICOM are proud to launch their new flagship. The IC-751 was good, the new ICOM IC-751A is even better. With a general coverage receiver 100KHz - 30MHz it is a full featured all-mode solid state transceiver that covers all the WARC bands. The IC-751A has an excellent 105db dynamic range and features pass band tuning, notch filter, adjustable AGC, noise blanker and RIT. A receiver pre-amp provides additional sensitivity when required. On C.W. the electronic keyer is standard and 40 w.p.m. at full break-in is possible. The FL32 500Hz C.W. filter is fitted as is sidetone on receive mode. On SSB the new FL80 2.4KHz high shape factor filter is fitted.


The high reliability transmitter, full 100% duty cycle designed for SSB, CW, AM, FM, RTTY and Amtor, with a high performance speech processor to enhance the IC-751A transmitters operation. With 32 memory channels and twin V.F.O.'s, scanning of frequencies and memory are possible from the transceiver or from the HM12 mic supplied.

The IC-751A is fully compatible with ICOM auto units such as the AT500 automatic antenna tuner and the IC-2KL linear amplifier. Options available: PS35 internal A.C. P.S.U., PS15 external A.C. P.S.U., EX310 voice synthesizer, SM8 and SM10 desk mics and various filter options.



Thanet ICOM  
Thanet ICOM  
Thanet ICOM  
Thanet ICOM  
Thanet ICOM  
Thanet ICOM  
Thanet ICOM  
Thanet ICOM  
Thanet ICOM



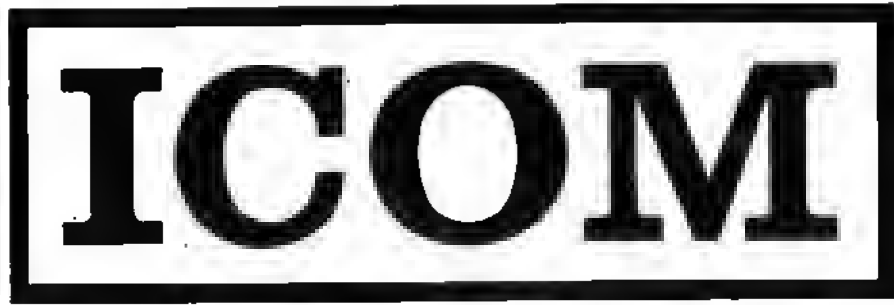

## The KOM Control System

If you have a BBC Micro (Model B) or Commodore 64 or 128, the ICOM control system can control up to four (or more) ICOM radios in the range IC-751, 735, R71, R7000, 271, 471 and 1271 (and 745 with modification). The help menu shows the available functions.


|                      |                        |
|----------------------|------------------------|
| H = HELP             | ↔ Frequency Steps      |
| F0 Frequency         | ↑ V Up/Down (arrows)   |
| F1 Select Mode       | M Memory Channel       |
| F2 Freq/Memory Scan  | .. Memory Up/Down      |
| F3 Mode Scan         | / VFO/Memory           |
| F4 VFO → Memory      | B Bargraph Select      |
| F5 Memory Write      | (u) Occupancy On/Off   |
| F6 Memory Clear      | : Scan Stop On/Off     |
| F7 Set 'SIG' Level   | S Change Set           |
| F8 Memory File Read  | DEL Speech (if fitted) |
| F9 Memory File Write | Q Quit                 |



## IC-735, The Compact HF Radio


The new ICOM IC-735 is ideal for mobile portable or base station operation. It has a general coverage receiver from 0.1MHz to 30MHz and transmits on all amateur bands from 160m to 10m. SSB, CW, AM and FM modes are included as standard. RTTY and AmTOR are also possible. The IC-735 has a built-in receiver attenuator, pre-amp, noise blanker and RIT to enhance receiver performance. A 105dB dynamic range with pass band tuning and a sharp I.F. notch filter for superior reception. The twin VFO's and 12 memories can store mode and frequency. The HM12 scanning mic is supplied. Scanning functions include programme scan, memory scan and frequency scan. The IC-735 is one of the first H.F. transceivers to use a liquid crystal display which is easily visible under difficult conditions. Controls that require rare adjustment are placed behind the front panel hatch cover but are immediately accessible. Computer remote control is possible via the RS-232 jack. Output power can be adjusted from 10 to 100 watts with 100% duty cycle. A new line of accessories are available, including the AT150 electronic automatic antenna tuner and the PS55 AC power supply. The IC-735 is also compatible with most of ICOM's existing line of HF accessories. See the IC-735 at your authorised ICOM dealer or contact Thanet Electronics Limited.



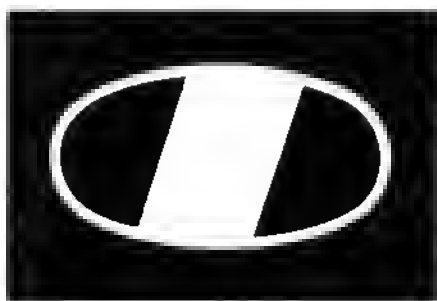

# ICOM

## IC-1271E, 1.2GHz Multimode Transceiver

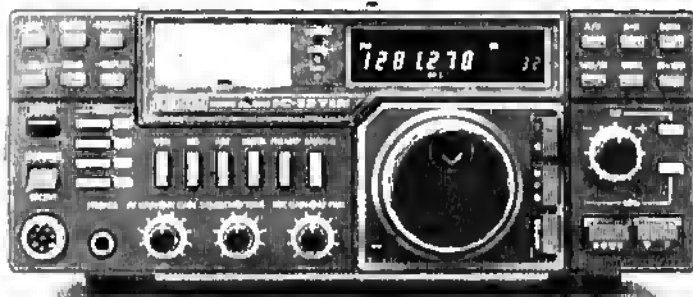

ICOM, a pioneer in 1.2GHz technology are proud to introduce the first full feature 1240 – 1300 MHz base station transceiver. Features include: multimode operation, 32 memories, scanning and 10 watts RF output. The IC-1271E allows you to explore the world of 1.2GHz thanks to a newly developed PLL circuit that covers the entire band, a total of 60MHz, SSB, CW and FM modes may be used anywhere in the band making the IC-1271E ideal for mobile, DX, repeater, satellite or moonbounce operation. The IC-1271E has outstanding receiver sensitivity, the RF amplifiers use a low noise figure and high-gain disc type GaAs FET's

for microwave applications. The rugged power amplifier provides 10 Watts which can be adjusted from 1 to 10 Watts. A sophisticated scanning system includes memory scan, programme scan, mode-selective scan and auto-stop feature. Scanning of frequencies and memories is possible from either the transceiver or the HM12 scanning microphone. 32 programmable memories are provided to store the mode and frequency in 32 different channels. All functions including memory channel are shown clearly on a seven digit luminescent dual colour display. The IC-1271E has a dial-lock, noise blanker, RIT, AGC fast or slow and VOX functions. With a powerful 2 Watt audio output the IC-1271E is easily audible even in a noisy environment. The transceiver operates with either a 240V AC (optional) or 12 volt DC power supply.



## IC-R71E, General coverage receiver.



The ICOM IC-R71E 100KHz to 30MHz general coverage receiver features keyboard frequency entry and infra-red remote controller (optional) with 32 programmable memory channels, SSB, AM, RTTY, CW and optional FM. Twin VFO's scanning, selectable AGC, noise blanker, pass band tuning and a deep notch filter. With a direct entry keyboard frequencies can be selected by pushing the digit keys in sequence of frequency. The frequency is altered without changing the main tuning control. Options include FM, voice synthesizer, RC-11 infra-red controller, CK70 DC adaptor for 12 volt operation, mobile mounting bracket, CW filters and a high stability crystal filter.



Thanet ICOM Thanet ICOM Thanet ICOM Thanet ICOM Thanet ICOM Thanet ICOM Thanet ICOM Thanet ICOM

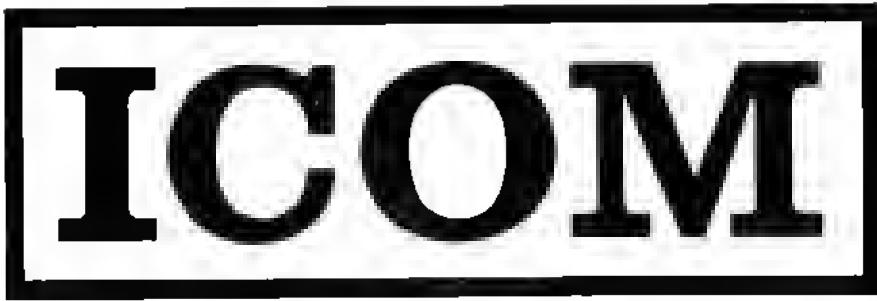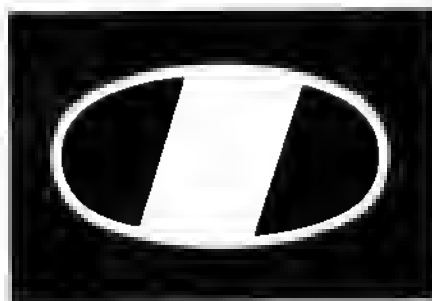

## IC-3200E Dual-band



If you are a newly licensed or just undecided about which band to first operate, then the ICOM IC-3200E is just the answer. This is a dual-band (144-146/430-440MHz) F.M. transceiver ideally suited for the mobile operator. The IC-3200E has a built in duplexer and can operate on one antenna for both VHF and UHF, and with 25 watts of output power on both bands (the low power can be adjusted from 1 to 10 watts) you can never be far from a contact whether simplex or 2m/70cm repeater.

The IC-3200E employs a function key for low priority operations to simplify the front panel and a new LCD display which is

easy to read in bright sunlight, 10 memory channels will show operating frequencies simplex or duplex, and four scanning systems memory, band, program and priority scan. Try this exciting set from ICOM the IC-3200E, when only the best will do.

Options include IC-PS45 AC power supply, HS15 inmobile boom mic, SP10 external speaker, UT23 speech synthesizer and AH32 dual-band mobile antenna.

Telephone us free-of-charge on:

**HELPLINE 0800-521145.**

— Mon-Fri 09.00-13.00 and 14.00-17.30 —

*This is strictly a helpline for obtaining information about or ordering ICOM equipment. We regret this service cannot be used by dealers or for repair enquiries and parts orders. Thank you*

You can get what you want just by picking up the telephone. Our mail order department offers you free same day despatch whenever possible, instant credit, interest free H.P., Barclaycard and Access facility, 24 hour answerphone service.



Listed here are just some of the authorised dealers who can demonstrate ICOM equipment all year round. This list covers most areas of the U.K. but if you have difficulty finding a dealer near you, contact Thanet Electronics and we will be able to help you.

Alyntronics, Newcastle, 0632-761002.  
Amateur Radio Exchange, London (Ealing), 01-992 5765.  
Amcomm, London (S. Harrow), 01-422 9585.  
A.R.E. Comms, Earlestown, Merseyside, 09252-29881.  
Arrow Electronics Ltd., Chelmsford, Essex, 0245-381673/26.  
Beamrite, Cardiff, 0222-486884.  
Booth Holdings (Bath) Ltd., Bristol, 02217-2402.  
Bredhurst Electronics Ltd., W. Sussex, 0444-400786.  
D.P. Hobbs, Norwich, 0603-615786.  
Dressler (UK) Ltd., London (Leyton), 01-558 0854.  
D.W. Electronics, Widnes, Cheshire, 051-420 2559.  
Eastern Communications, Norwich, 0603 667189.

Hobbytronics, Knutsford, Cheshire, 0565-4040. Until 10pm daily.  
Poole Logic, Poole, Dorset, 0202 683093.  
Photo Acoustics Ltd., Buckinghamshire, 0908-610625.  
Radcomm Electronics, Co. Cork, Ireland, 01035321-632725.  
Radio Shack Ltd., London NW6, 01-624 7174.  
R.A.S. Nottingham, 0602-280267.  
Ray Wilbers Comms, Warley, West Midlands, 021-421 8201.  
Scoicomm, Edinburgh, 031-657 2430.  
South Midlands Comms. & branches, 0703 867333.  
Tyrone Amateur Electronics, Co. Tyrone, N. Ireland, 0662-42043.  
Reg Ward & Co. Ltd., S.W. England, 0297-34918.  
Waters & Stanton Electronics, Hockley, Essex, 0702-206835.

**Thanet Electronics**  
Sea Street, Herne Bay Kent CT16 8LD  
Tel: (0227) 353859  
Dept. RC

# AE

# AMATEUR ELECTRONICS

# AE LTD

Open Tues - Sat.  
9.00 - 5.00 pm

TELEPHONE 021-327-1497/6313 BY FAR THE LARGEST  
PHONE THE REST THEN PHONE THE BEST FOR FAST DELIVERY, PROMPT


S. EAST MIDLANDS  
A J H, 151a Bilton Rd, Rugby,  
Warwickshire Tel 0788 76473

EAST ANGLIA  
Eastern Comms, 31 Cattlemarket St.,  
Norwich Tel 0603 667189

SOUTH WEST  
Uppington, 12-14 Pennywell Rd.,  
Bristol Tel 0272 557732

## YAESU PRODUCTS

|                 |  |        |
|-----------------|--|--------|
| <b>FT-757GX</b> | IIF transceiver gen coverage all modes | 879.00 |
| FC-757AT        | Automatic antenna tuner                | 318.00 |
| FP-757GX        | Switched mode PSU - 50% duty           | 189.00 |
| IP-757HD        | Heavy duty PSU - 100% duty             | 199.00 |
| FIF-65          | Computer interface Apple II            | 56.00  |
| FIF-80          | Computer interface N.E.C.              | 130.00 |
| FIH-232C        | Computer interface RS-232              | 68.90  |
| IAS-14R         | Remote antenna selector                | 80.50  |
| MMB-20          | Mobile mount                           | 22.00  |
| IP-700          | Matching power supply                  | 176.00 |
| FC-700          | Matching antenna unit                  | 132.50 |
| IP-757GX        | When purchased with FT-757GX           | -      |

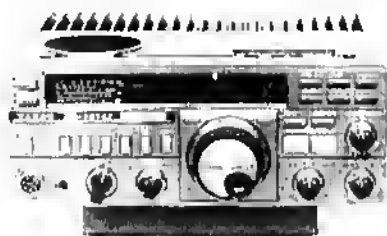

**FT-757GX £879**

|                 |  |         |
|-----------------|--|---------|
| XI-89XC         | CW filter 1600 Hz                                | 21.00   |
| XI-89XCN        | CW filter 1300 Hz                                | 21.00   |
| <b>FRG-8900</b> | Gen coverage Rx. 150 kHz 30 MHz, AM, CW SSB NBFM | 575.00  |
| IRV-6800        | Converter 118-174 MHz                            | 80.00   |
| <b>FT-726R</b>  | Millimetre transceiver 2m filter                 | 899.00  |
| 21-7228         | IIF module                                       | 249.00  |
| 50-726          | 5m module  | 228.00  |
| 430-726         | 70cm module                                      | 309.00  |
| SAT-726         | Duplex module                                    | 116.00  |
| XF-455MC        | 300Hz CW Filter (Ceramic)                        | 54.00   |
| <b>FT-290R</b>  | 2m Portable/mobile base/mobile mode              | £369.00 |
| FL-2010         | 10W linear for chase                             | -       |



**FRG-9600 £469**

## AGENTS

### SHROPSHIRE

Sybil Poole, G3IMP, Newport, SA1 0P 09521 817134

### NORTH STAFFS

Bob Ange, G4XEK (0538) 754553

### WALES & WEST

Ross Chair, GW3NWS (06331) 880 146

|                 |                             |        |
|-----------------|-----------------------------|--------|
| MMB-11          | Mobile mount                | 33.00  |
| NC11C           | Charger                     | 10.00  |
| CSC-1A          | Case                        | 6.50   |
|                 | Antenna telescopic (spare)  | 6.15   |
| YHA-15          | Helical antenna             | 7.50   |
| YM-49           | Spk mic                     | 19.00  |
| YH-1            | Headset mic                 | 17.00  |
| SB-2            | Switching unit              | 16.00  |
| MF-1A3B         | Mobile mic                  | 23.00  |
| YM-49           | Spk mic                     | 19.00  |
| MF-1A3B         | Mobile boom mic             | 23.00  |
| SB-2            | Switching unit              | 16.00  |
| <b>FT-209R</b>  | 2m synth 1M handle 350mw/3W | 265.00 |
| <b>FT-209RH</b> | 2m synth 1M handle 500mw/5W | 279.00 |
| NC-15           | Base sin charger/adaptor    | 65.00  |
| NC-18           | Standard charger (FNB-4)    | 10.00  |
| NC-9C           | Standard charger (FNB-3)    | 10.00  |
| FF-501DX        | Low pass filter             | 33.00  |
| LB              | Log book                    | 2.50   |
| QTR-24D         | World Clock                 | 39.00  |
| YH-55           | Headphones                  | 17.50  |
| YH-77           | Headphones (lightweight)    | 17.50  |

## DUAL BANDER



**FT-2700RH £499**

|                   |  |        |
|-------------------|--|--------|
| MH-12A2B          | Spk mic  | 20.00  |
| MMB-21            | Mobile Mount   | 9.00   |
| YH-2              | Headset mic  | 17.00  |
| PA-3              | DC adaptor   | 19.00  |
| INB-3             | 108V batt pack   | 38.00  |
| FNB-4             | 12V batt pack  | 44.00  |
| IBA-5             | Bat case for 6AA dry cell  | 8.00   |
| <b>FT-203</b>     | 2m synth handle thumbwheel tuning + INB-3                                    | 225.00 |
| <b>FT-203</b>     | 2m synth handle thumbwheel tuning + FNB-4                                    | 229.00 |
| <b>FT-203R</b>    | 2m synth handle thumbwheel tuning + IBA-5 (accessories as for FT-203R)       | 195.00 |
| <b>FT-2700 RH</b> | Dual band receiver 2m and 70cm 11m duplex Scanning priority 10 mems Dual VFO | 499.00 |
| FVS-1             | Voice synthesiser module   | 25.00  |
| <b>FT-270R</b>    | 2m FM transceiver 25W Scanning mems Dual VFO                                 | 359.00 |
| <b>FT-270 RH</b>  | 2m FM transceiver 45W Scanning mems Dual VFO                                 | 399.00 |
| FVS-1             | Voice synthesiser 270R/270RH   | 25.00  |
| YHA-44            | 1/4 wave helical antenna   | 7.50   |

## FT-726R £879



|               |   |         |
|---------------|---|---------|
| YH-1          | Headset mic                                       | 17.00   |
| SB-2          | Switching unit                                    | 16.00   |
| MF-1A3B       | Mobile boom mic                                   | 23.00   |
| YM-49         | Spk mic   | 19.00   |
| YH-1          | Headset mic                                       | 17.00   |
| SB-2          | Switching unit                                    | 16.00   |
| MI-1A3B       | Mobile boom mic                                   | 23.00   |
| FT-980        | IIF transceiver with gen coverage RX (SAI system) | 1759.00 |
| <b>SP-980</b> | External speaker with audio filter                | 99.00   |
| FC-757AT      | Automatic antenna tuner                           | 318.00  |
| FIH-232C      | Computer interface RS-232                         | 68.90   |
| FIF-65        | Computer interface Apple II                       | 56.00   |
| FIF-80        | Computer interface N.E.C.                         | 130.00  |
| XI-89HC       | CW filter 1600 Hz                                 | 35.00   |
| XF-89HCM      | CW filter 1450 Hz                                 | 35.00   |
| XF-89HCN      | CW filter 1300 Hz                                 | 35.00   |
| XF-455MC      | CW filter (ceramic)                               | 54.00   |
| XF-455MCN     | CW filter (ceramic)                               | 56.00   |
| NC-8C         | Base sin charger adaptor 208-708                  | 68.00   |
| NC-7          | Base sin charger 208-708                          | 36.00   |
| NC-9C         | Standard charger                                  | 10.00   |



**FT-980 £1759**

|                |   |             |
|----------------|---|-------------|
| YHA-44D        | 1/2 DC grounded antenna   | 10.95       |
| YM-24A         | Spk mic   | 27.00       |
| PA-3           | DC adaptor  | 19.00       |
| MMB-10         | Mobile mount  | 8.50        |
| INB-2          | Battery pack  | 25.00       |
| FBA-2          | Battery pack adaptor INC8A-NC-71  | 3.85        |
| <b>FT-703R</b> | 70cm handle thumbwheel tuning + INB-3                                       | 255.00      |
| <b>FT-703R</b> | 70cm handle thumbwheel tuning + FNB-4 (Accessories as for FT-209 - FT-203R) | 260.00      |
| <b>FT709R</b>  | 70cm handy portable synthesiser (3 options)                                 | from 255.00 |
| FRI-770Q       | Antenna tuning unit   | 53.55       |
| FRA-770Q       | Active antenna  | 46.50       |
| FF-5           | Filter  | 10.75       |

FREEPOST -  
MAIL DROER  
ENQUIRIES



Amateur Electronics Ltd.  
FREEPOST  
Birmingham B8 1BR

504 ALUM ROCK ROAD,  
ALUM ROCK, BIRMINGHAM B8 3HX

**RETAILER IN THE COUNTRY**

**TELEPHONE: 021-327 1497/6313**

**ATTENTION, FREE POST SERVICE, KEENEST PRICES & EXCELLENT PART EXCHANGE**

**NORTHERN**  
Holdings, 45 Johnston St,  
Blackburn Tel 0254 59595

**EAST MIDLANDS**  
R.A.S. Nons, 3 Farndon Green,  
Wollaton Park, Nottingham Tel 0602 280267

**YORKSHIRE**  
A.J. Hooker, 42 Nether Hall Rd.,  
Doncaster Tel 0302 25690

## YAESU ANTENNAS

|          |                        |       |
|----------|------------------------|-------|
| M150-GSX | 2m 1/4 whip            | 7.35  |
| RSL-435S | 70cm 1/4 oval 1/4 whip | 28.50 |
| RSM-4M   | Mag mount for above    | 21.00 |

## MICROWAVE MODULES

|              |                          |  |
|--------------|--------------------------|--|
| MM1144/30LS  | inc preamp (1/3w lpl)    |  |
| MM1144/50S   | inc preamp, switchable   |  |
| MM1144/100S  | inc preamp (10w lpl)     |  |
| MM1144/100HS | inc preamp (25w lpl)     |  |
| MM1144/100LS | inc preamp (1/3w lpl)    |  |
| MM1144/200S  | inc preamp (3/10/25 lpl) |  |
| MM1432/30L   | inc preamp (1/3w lpl)    |  |
| MM1432/50    | inc preamp (10w lpl)     |  |
| MM1432/100   | linear (10w lpl)         |  |

## B.N.O.S.

|                |                               |  |
|----------------|-------------------------------|--|
| LPM 144-1 100  | 2m, 1W in, 100W out, preamp   |  |
| LPM 144-3 100  | 2m, 3W in, 100W out, preamp   |  |
| LPM 144-10 100 | 2m, 10W in, 100W out, preamp  |  |
| LPM 144-25 160 | 2m, 25W in, 160W out, preamp  |  |
| LPM 144-3 180  | 2m, 3W in, 180W out, preamp   |  |
| LPM 144-10 180 | 2m, 10W in, 180W out, preamp  |  |
| 1P 144-3 50    | 2MN, 50W out, preamp          |  |
| LP 144-10 50   | 2M, 10W out, preamp           |  |
| LPM 432-1 50   | 70cm, 1W in, 50W out, preamp  |  |
| LPM 432-3 50   | 70cm, 3W in, 50W out, preamp  |  |
| LPM 432-10 50  | 70cm, 10W in, 50W out, preamp |  |

Ring for prices



## NOW IN STOCK

|             |                |       |
|-------------|----------------|-------|
| 70cms       |                |       |
| 432-5B      | 5 Ele          | 16.95 |
| 432-19T-AFV | 19 Ele         | 35.60 |
| 432-17X     | 17 Ele Crossed | 49.17 |
| 432-17T     | 17 Ele Long    | 39.20 |

|         |               |       |
|---------|---------------|-------|
| 2M      |               |       |
| 144-5   | 5 Ele         | 19.55 |
| 144-7T  | 7 Ele         | 24.15 |
| 144-8T  | 8 Ele Long    | 31.25 |
| 144-14T | 14 Ele        | 46.71 |
| 144-19T | 19 Ele        | 55.88 |
| 144-6X  | 6 Ele Crossed | 39.75 |
| 144 GP  | Ground Plane  | 14.41 |

|     |       |       |
|-----|-------|-------|
| 4M  |       |       |
| 703 | 3 Ele | 30.12 |
| 705 | 5 Ele | 45.74 |

|                 |       |       |
|-----------------|-------|-------|
| POWER SPLITTERS |       |       |
| 70cms           | 2 Way | 19.55 |
|                 | 4 Way | 23.00 |
| 2M              | 2 Way | 25.50 |
|                 | 4 Way | 28.75 |

## T.E.T. ANTENNAS

|          |  | SRP    | Discount Price |
|----------|--|--------|----------------|
| AX210N   | 10 element crossed Yagi, 2 metres              | 74.94  | 59.00          |
| HB15F2T  | 2 element 15 meter beam                        | 60.66  | 48.50          |
| HB15M2SP | 2 element 15 meter mini beam                   | 69.49  | 55.59          |
| HB210S   | 10 element 2 meter beam                        | 47.99  | 38.40          |
| HB23SP   | 2 element tri-band beam 10, 15, 20m            | 172.50 | 138.00         |
| HB23M    | 2 element tri-band beam (mini) 10, 15, 20m     | 169.50 | 135.90         |
| HB32SP   | 3 element dual-band beam 10, 15m               | 168.64 | 134.99         |
| MLA4     | 11F band 100p antenna                          | 105.60 | 84.40          |
| MV3BN    | Vertical antenna 10, 15, 20m                   | 45.95  | 36.79          |
| MV3BHR   | Vertical antenna 10, 15, 20m + trapped radials | 78.00  | 67.00          |
| Q7U10S   | 10 element 430 MHz Yagi                        | 67.90  | 54.32          |
| SQ007    | Double quad 430 MHz                            | 66.99  | 53.59          |
| SQ10     | 10 meter quad mono band antenna                | 97.50  | 78.00          |
| SD15     | 15 meter quad mono band antenna                | 106.89 | 85.59          |
| SQ22     | Double quad 144 MHz                            | 58.95  | 47.00          |
| SOY06    | Swiss quad/yagi 144 MHz 6 element              | 45.75  | 36.60          |
| SQY08    | Swiss quad/yagi 144 MHz 8 element              | 52.74  | 42.00          |
| SSL218   | Double 144 MHz slot Yagi 9 element             | 144.78 | 115.89         |
| TE214    | 14 element long Yagi 144 MHz                   | 74.39  | 59.50          |

New APPROVED YAESU Stockist  
in LEICESTER

**Elliott Electronics**  
26/28 Braunstone Gate, Leicester  
(0533) 553293

## DATONG PRODUCTS

|           |                                 |        |
|-----------|---------------------------------|--------|
| PCI       | Gen. Cov. Con                   | 137.40 |
| VLF       | Very low frequency conv         | 29.90  |
| FL2       | Multi-mode audio filter         | 89.70  |
| FL3       | Audio filter for receivers      | 129.00 |
| ASP/P     | 1st speech clipper for Trio     | 82.80  |
| ASP/A     | 1st speech clipper for Yaesu    | 82.80  |
| ASP       | As above with 6 pin conn        | 89.70  |
| D75       | Mannal RF speech clipper        | 56.35  |
| D70       | Moise filter                    | 56.35  |
| MK        | Keyboard noise sender           | 137.40 |
| RFA       | RF switched pre amp             | 33.90  |
| AD270-MPU | Active dipole with mains p.s.u. | 51.75  |
| AD370-MPU | Active dipole with mains p.s.u. | 69.00  |
| MPU       | Mains power unit                | 6.90   |
| DC144/28  | 2m converter                    | 39.67  |
| P1S1      | Tone squelch unit               | 45.00  |
| ANF       | Automatic notch filter          | 67.85  |
| SRB2      | Auto Woodpacker blanker         | 85.25  |

## FT770RH IS NOW AVAILABLE

|                     |                                       |        |
|---------------------|---------------------------------------|--------|
| T30                 | 30 Watt 3.5-500 MHz dummy load        | 8.05   |
| 1100                | 100 Watt 3.5-500 MHz dummy load       | 35.20  |
| T200                | 200 Watt 3.5-500 MHz dummy load       | 42.55  |
| BL40X               | 50 ohm 50 ohm 1:1 Balun 1kw pep       | 16.90  |
| BL50A               | 50 ohm 50 ohm 1:1 Balun 4kw (pap)     |        |
|                     | 2kw (cwl)                             | 19.84  |
| SA450N              | 2 way antenna switch, 'N' connectors  | 18.40  |
| SA450M              | 2 way antenna switch SO239 connectors | 14.49  |
| YM1X                | 3.5-150 MHz 120 Watt SWR/PWR meter    | 21.49  |
| Insulators          |                                       |        |
| AE/EGG              | Ceramic egg insulator                 | 0.40   |
| AE/DOG              | Ceramic dog bone insulator            | 0.60   |
| TOYO                |                                       |        |
| 1430                | 144/432 120W                          | 44.65  |
| 1435                | 144/432 200W                          | 49.35  |
| HI-MOUND MORSE KEYS |                                       |        |
| HK702               | Up down keyer marble base             | 30.95  |
| HK703               | Up down keyer                         | 29.35  |
| HK704               | Up down keyer                         | 19.95  |
| HK705               | Up down keyer                         | 15.49  |
| HK706               | Up down keyer                         | 16.95  |
| HK708               | Up down keyer                         | 14.95  |
| HK802               | Up down solid brass                   | 86.31  |
| HK803               | Up down brass                         | 82.64  |
| HK808               | Up down keyer                         | 39.95  |
| MK704               | Twin paddle Leyer                     | 13.50  |
| MK705               | Twin paddle keyer marble base         | 25.65  |
| KENPRO              |                                       |        |
| KP100               | Squeeze CMOS 230 13 Bv                | 82.50  |
| KP200               | Memory 4096 Multi channel             | 169.50 |

**Prices are correct at time of going to press**  
**Contact us now for immediate quotation**



FRG-8800

£575

## TOKYO HY POWER

|         |                       |        |
|---------|-----------------------|--------|
| ATU's   |                       |        |
| HC 200  | HF bands ATU 200W PEP | 82.95  |
| HC 400L | HF bands ATU 350W PEP | 175.75 |

## LINEARS VHF

|           |                                   |        |
|-----------|-----------------------------------|--------|
| HL 30V    | 30W 2m linear 0.5 3W input        | 45.00  |
| HL 35V    | VHF linear 0.5 5W (3W in 30W out) | 69.95  |
| HL 82V    | 85W 2m linear 10W input           | 144.49 |
| HL 110V   | 110W 2m linear                    | 199.00 |
| HL 160V   | 160W 2m linear 10W input          | 244.52 |
| HL 160V25 | 160W 2m linear 25W input          | 209.75 |

## LINEAR UHF

|         |                            |        |
|---------|----------------------------|--------|
| HL 20U  | 20W 70cm linear            | 82.90  |
| HL 30U  | 30W 70cm linear            | 119.00 |
| HL 60U  | 60W 70cm linear 10W input  | 198.99 |
| HL 120U | 120W 70cm linear 10W input | 356.85 |

## PREAMPS

|       |                        |        |
|-------|------------------------|--------|
| HRA 2 | 2m mast head pre-amp   | 94.99  |
| HRA 7 | 70cm mast head pre-amp | 103.29 |

**FREEPOST - MAIL ORDER ENQUIRIES**

**Amateur Electronics Ltd.**  
**FREEPOST**  
**Birmingham B8 1BR**

**504 ALUM ROCK ROAD,**  
**ALUM ROCK, BIRMINGHAM B8 3HX**



# **A.R.E.**

6 Royal Parade, Hanger Lane, Ealing, London  
W5A 1ET, England Telephone: 01-997 4476  
Telex: 946240 (CW EASY G) Ref: 19005275

## **Communications Ltd.**



For all types of communication  
equipment for professional purposes.



P.M.R. · Cellular  
Communication Receivers  
Scanning Receivers · HF Transceivers  
UHF & VHF Equipment  
RTTY Terminal Units



Tait · Phillips · Maxon · Icom · Yaesu  
· Motorola · National Panasonic ·  
Mobira



*Also, we buy for CASH all types of  
second hand communication  
equipment*



**Phone: 01-997 4476**







"Bernie - what about people who can't get to N.E.C?"

# A.R.E.

38 BRIDGE ST.,  
EARLESTOWN,  
NEWTON-LE-WILLOWS,  
MERSEYSIDE.  
TEL: 09252-29881



"We'll hold these prices until May Brenda."

## Communications Ltd.

**BERNIE AND BRENDA PROMISE TO TEAR NEC APART  
WITH THEIR SPECIAL EXHIBITION PRICES**

### NEW 2 METRE HANDHELD TRANSCIVERS BY KENPRO

6 CHANNEL (2 Fitted)  
2 WATTS

**£55 EACH OR TWO FOR £99**

### YAESU FT-726

2 Metre-70cms & HF all in one  
rig - The complete base station



**FROM £749**

### YAESU FRG-9600

Probably the most  
comprehensive receiver  
ever for the serious  
shortwave listener. Now  
with HF plug-in converter,  
500KC-30MHz HF  
60MHz-905MHz VHF/UHF  
ALL MODE



**£449**

INC. HF CONVERTER

### YAESU FT-757GX

Still the most popular HF  
rig available. Complete  
SSB, AM, FM, CW  
Transceiver. General  
coverage receiver, scan &  
memories



**£699**

### YAESU FT290 AND FT690

All mode portable  
Transceiver. Now  
available for 6 metre  
coverage. Complete with  
nicads, charger,  
carrying case.



**SPECIAL SHOW PRICE**

Once again, the year's major  
amateur radio exhibition at  
NEC Birmingham is just  
around the corner. Once  
again B & B are as  
determined as ever to  
offer the best value to be  
had at the Show. We  
have selected just a  
few items from the  
vast selection that

we will be  
showing and, as  
always, we will  
have a large  
stock of all  
makes that  
can be  
bought at  
our  
stand.

### NEW ICOM ICR7000 25MHz to 2GHz

All mode, 99 Memories,  
Keyboard Entry,  
6 Tuning Speeds,  
Optional microphone  
Control + Voice  
Synthesiser



**£849**

### ICOM IC3200 DUAL BANDER

Icom's Superb dual-band mobile Transceiver  
with built-in  
Duplexer



**SPECIAL SHOW OFFER**

### HAND-HELD TRANSCIVERS ALL POPULAR MODELS IN STOCK

|         |           |
|---------|-----------|
| FT203   | FROM £159 |
| FT209   | FROM £199 |
| FT209RH | FROM £239 |
| FT703   | FROM £205 |
| FT709   | FROM £225 |
| TH21    | FROM £149 |



Heavy Duty Battery PB21H  
for TH21 or TH41

### KENWOOD-TRIO TS940

Undoubtedly the finest  
HF amateur transceiver  
yet produced. Owing to  
pound fluctuation at the  
time of going to press  
it is impossible to quote  
a firm price. We will certainly be able to quote a very  
attractive price at NEC.



### CONVERT YOUR SCANNER TO 1.3GHz OR HF OR BOTH

A.R.E. Communications have developed 2 converters to  
match most VHF scanners. If you own an AOR2001 the  
converter will tune to 1.3GHz or if you have an FT-9600  
you can convert down to HF tuning from 100KC to  
30MHz to make a truly general coverage receiver.


**£89 EACH**

Trade enquiries welcome

All prices include VAT and are correct as we go to press


Phone 09252-29881 for all mail order - Access & Barclaycard accepted

Opening hours: Tuesday-Saturday  
10am-5pm



# MICROWAVE MODULES LTD

## THE NEW 50MHz TRANSVERTER

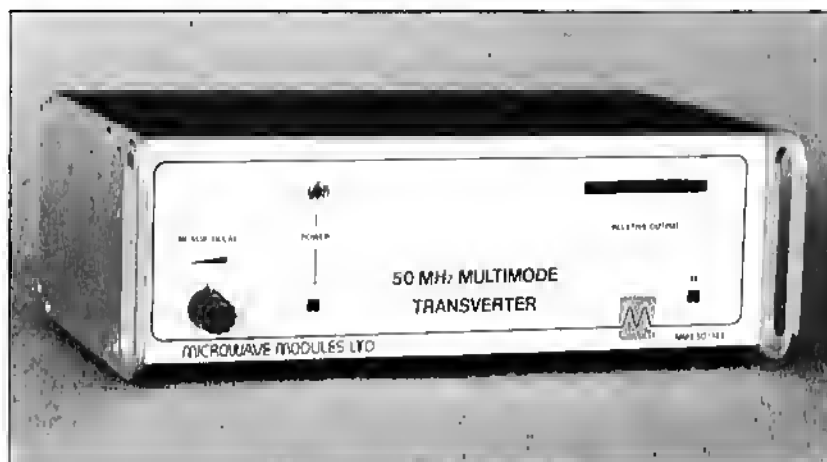

The new 50MHz multimode transverter will be unveiled for the first time at the NEC. To be sure of the best views of this superb new product visit the stand and talk to the sales team.

### FEATURES:

|                 |                   |
|-----------------|-------------------|
| OUTPUT POWER    | 20 Watts          |
| I.F.            | 144 or 28MHz      |
| OUTPUT RANGE    | 50-54MHz          |
| INPUT POWERS    | 150mW-15 Watts    |
| NOISE FIGURE    | Better than 4.5dB |
| SPURIOUS OUTPUT | -65db or better   |

**PRICE £245.00 inc Vat**

### Reports from U.S.A. on MMT 144/28R

We've managed to find an extract from the March '86 issue of CQ Magazine published in the U.S.A., so lets see what our friends across the water are saying about the 144/28R.

"receive performance is excellent, a very noticeable improvement over just about anything else I've used on two meters.... Such outstanding receive performance is the result of careful gain distribution and high-level balanced mixer stage.... sub-microvolt signals simply "jump" out of the noise and are easily readable.... my own two meter repeater on 146.805 located here at my home QTH and running 150 watts carrier power to an antenna system less than 10 feet from my "main" two meter yagi system, did not even seem to desense the receive section of this transverter. This was amazing.... In all, the MMT 144/28R is an excellent product which would make a fine addition to any VHF'ers shack"

extracts by Steve WB2WIK from March '86 QC Magazine—thanks to both.

Well that seems a glowing testimonial—lets see what they have to say about our new 50MHz transverter when it reaches their shores!

|               |                                  | Total inc VAT | Post Rate |               |                                 | Total inc VAT | Post Rate |
|---------------|----------------------------------|---------------|-----------|---------------|---------------------------------|---------------|-----------|
| MML2B/100-S   | 10m 100W Linear, 10W input       | 129.95        | C         | MMT432/28-S   | 70cm Linear Transverter         | 195.50        | B         |
| MML144/30-LS  | 2m 30W Linear, 1 or 3W input     | 94.30         | B         | MMT1296/144-G | 23cm Linear Transverter         | 258.75        | D         |
| MML144/50-S   | 2m 50W Linear, 10W input         | 106.95        | B         | MMX1286/144   | 1268MH Transmit Up-Converter    | 195.50        | D         |
| MLL144/100-S  | 2m 100W Linear, 10W input        | 149.95        | C         |               |                                 |               |           |
| MML144/100-HS | 2m 100W Linear, 25W input        | 159.85        | C         | MMC50/28      | 6m down to 10m Converter        | 35.65         | A         |
| MML144/100-LS | 2m 100W Linear, 1 or 3W input    | 169.95        | C         | MMC144/28     | 2m down to 10m Converter        | 35.65         | A         |
| MML144/200-S  | 2m 200W Linear, 3, 10, 25W input | 334.65        | D         | MMC144/28-HP  | 2m High Performance Converter   | 47.90         | A         |
| MML432/30-L   | 70cm 30W Linear, 1 or 3W input   | 169.05        | C         | MMC432/2B-S   | 70cm down to 10m Converter      | 39.90         | A         |
| MML432/50     | 70cm 50W Linear, 10W input       | 149.50        | C         | MMC432/144-S  | 70cm down to 2m Converter       | 39.90         | A         |
| MML432/100    | 70cm 100W Linear, 10W input      | 334.65        | D         | MMK1296/144   | 23cm down to 2m Converter       | 129.95        | B         |
|               |                                  |               |           | MMK1691/137.5 | 1690MHz WX Satellite Converter  | 145.00        | B         |
| MMC435/600    | 70cm ATV Converter, UHF output   | 35.65         | A         |               |                                 |               |           |
| MTV435        | 70cm ATV 20W Transmitter         | 197.80        | B         | MMG144V       | 2m RF Switched GaAsFET Preamp   | 37.90         | A         |
|               |                                  |               |           | MMG1296       | 23cm GaAsFET Preamplifier       | 75.00         | A         |
| MM2001        | RTTY to TV Converter             | 189.00        | B         | MMG1691       | 1690MHz GaAsFET Preamp          | 129.95        | B         |
| MM4001-KB     | RTTY Transceiver with keyboard   | 299.00        | D         |               |                                 |               |           |
| MMS1          | The Morsetalker                  | 115.00        | B         | MMD1500P      | 1500MHz Divide by Ten Prescaler | 119.60        | A         |
| MMS2          | Advanced Morse Trainer           | 169.00        | B         |               |                                 |               |           |
| MMT50/144     | 6m Linear Transverter, 20W o/p   | 245.00        | B         | MMR3/25       | 3dB 25 Watt Attenuator          | 19.95         | A         |
| MMT144/28     | 2m Linear Transverter, 10W o/p   | 129.95        | B         | MMR7/3        | 7dB 3 Watt Attenuator           | 14.50         | A         |
| MMT144/28-R   | 2m Linear Transverter, 25W o/p   | 236.90        | B         | MMR15/10      | 15dB 10 Watt Attenuator         | 14.50         | A         |

Postage/Packing Charges: A = £1.84 B = £3.91 C = £4.60 D = £5.98



WELCOME

## MICROWAVE MODULES LTD

BROOKFIELD DRIVE, AINTREE, LIVERPOOL L9 7AN, ENGLAND

Telephone: 051-523 4011 Telex: 628608 MICRO G

CALLERS ARE WELCOME, PLEASE TELEPHONE FIRST

**HOURS:**  
**MONDAY-FRIDAY**  
**9-12.30, 1-5.00**  
E. & O.E.

**NOW**  
**AM ~~COMING~~ - ARE**  
**UNDER ONE**  
**ROOF AT**  
**UXBRIDGE**  
**ROAD**

239



# South Midlands

HQ & MAIL ORDER S.M. HOUSE, RUMBRIDGE ST. TOTTON, SOUTHAMPTON

## NEWLY APPOINTED SMC AGENT IPSWICH COMMS

**PAT GILLEN**

is now an Appointed SMC Agent in the Suffolk/Norfolk area. Call in today to see the Fabulous Yaesu Range.

Ipswich Comms., 297 Bramford Road,  
Ipswich, Suffolk IP1 4AT.  
Tel: (0473) 462173

**THE  
BIGGEST  
SELLER**



Every item normally sold as an extra is provided as standard, including AM & FM modes, a 600Hz Narrow CW Filter, Iambic Keyer with dot-dash memory, 25kHz Marker Generator, IF Shift and Width Filters, Effective Noise Blanker and AF Speech Processor.

**ALL AT NO EXTRA CHARGE.**

**FT757GX**

## YAESU HAS SERIOUS LISTENERS. . . .



Yaesu's serious about giving you better ways to tune into the world around you. And whether it's for local activity or worldwide DX, you'll find our VHF, UHF and HF receivers are the superior choice for all your listening needs.

**The FRG9600.** A high grade VHF/UHF Scanning Receiver. The FRG9600 is not just another scanner and it's easy to see why; with continuous coverage from 60-905MHz.

You have more operating modes; Upper and Lower Sidebands; CW, AM Wide & Narrow and FM Wide & Narrow.

Store any frequency and its related mode into any of the 99 memories. Scan the memories, or in between them, stepping in either 5, 10, 12½, 25 or 100kHz steps or simply "Dial Up" the frequency using the Colour Coded Keypad.

There's also for your information and pleasure a 24hr Clock, LCD readout, Signal Strength Meter, Optional Computer Interface and AC Adaptor.

## INTRODUCING THE NEW X40 SERIES FROM KDK



**2M & 70cm Mobile Transceivers**  
FM240 £329.00 FM740 £339.00



**FULL  
DUPLEX**

The ultimate 2M & 70cm FM radio built on Yaesu's new Diecast Aluminium Chassis, allowing 25W output on both bands. Two four-bit CPUs allow simple operation of the dual VFOs, 10 Memory channels—with back-up. Dual Receiver Front ends, Local Synthesisers, IFs and transmitter RF stages give Full Duplex Capability. Large green aesthetically pleasing LCD display shows transceiver operating status at a glance.



**The FRG8800.** HF Receiver, altogether a better way to listen to the world. If you're looking for a 'Total Receiver System' then the FRG8800 is for you.

With continuous worldwide coverage from 150kHz to 30MHz and local coverage from 118 to 174MHz with the optional VHF Converter.

Listen in on any mode; Upper and Lower Sideband, CW, AM Wide and Narrow or FM.

Store mode and frequency in any one of twelve memories for instant recall or use one of the many programmable scanning functions for monitoring the bands.

Also included for ease and pleasure of operation are a keyboard—for quick frequency entry, a Digital Sino Meter, Computer Interface Capability, Dual 24 hour Clocks and much more.

When you want more from your receivers just look to Yaesu. We take your listening seriously.

## FOR THE SERIOUS LISTENER.

**LEEDS**  
SMC (Leeds)  
257 Olley Road,  
Leeds 16, Yorkshire.  
Leeds 105321 782326  
9-5.30 Mon-Sat

**CHESTERFIELD**  
SMC (Jack Tweedy) Ltd  
102 High Street,  
New Whittingdoun, Chesterfield.  
Chesterfield 102461 453340  
9.30-5.30 Tue-Sat

**BUCKLEY**  
SMC (TMP)  
Unit 27, Pinfold Lane,  
Buckley, Chwyd.  
Buckley 102441 549563  
10-5 Tue, Wed, Fri  
10-4 Sat

**STOKE**  
SMS (Stoke)  
76 High Street,  
Tolke Pils, Stoke.  
Kidsgrove 1078161 72644  
9-5.30 Tue-Sat

**HUMBERSIDE**  
SMC (Humbeside)  
247A Freeman Street,  
Grimsby, Humberside  
Grimsby 104721 59388  
9-30-5.30 Mon-Sat

**JERSEY**  
SMC (Jersey)  
1 Belmont Gardens,  
St Helier, Jersey.  
Jersey 105341 77067  
9-5 Mon-Sat  
Closed Wednesday

**N. IRELAND**  
SMC (N Ireland)  
10 Ward Avenue,  
Bangor, Co. Down.  
Bangor 102471 464875

Southampton Showroom open 9-5.30 pm Monday to Friday, 9-1pm Saturday.

AGENTS NORMAN OILLEY, DARTCOMMS, DARTMOUTH 1080431 3534 and PAT GILLEN, IPSWICH, COMMS, IPSWICH 104731 462173

# Communications Ltd.



SO4 4DP, ENGLAND. Tel: (0703) 867333, Telex: 477351 SMCMM G.

## SPRING IS HERE!!

### MULTIMODE OPERATION

Never before possible from such a compact package, true multimode operation is yours to enjoy. With CW and SSB activity at an all-time high, you will not be left out of the satellite or DX action and you can still ragchew on FM simplex or even via a repeater.

### ADVANCED MICRO CONTROL

Advances in microprocessor circuitry allows selectable synthesizer steps, up/down scanning from the microphone, priority channel operation, and ten memories (with memory scan), all called up with fingertip ease.

### LCD DISPLAY

A large Liquid Crystal Display provides readout of the operating frequency. It is highly readable under conditions of bright sunlight and is backed up by a lamp for night-time operation.

### PROGRAMMABLE SYNTHESIZER

The optimum synthesizer steps for SSB/CW FM operation are very different. That's why Yaesu gives you the flexibility of two synthesizer steps per mode: 100Hz or 1kHz.



per step on SSB, AM & CW, and 12/125kHz on FM. When changing modes from SSB/CW to FM, your transceiver is automatically set to the nearest standard channel when you start scanning or tuning.

### TEN MEMORY CHANNELS

As many as ten frequencies may be stored into memory, for instant recall. The priority feature allows you to check a favourite frequency every few seconds, with automatic halting (FM mode) when the channel is clear or busy, as desired. Memory backup is provided by a built-in lithium cell.

### DUAL VFO SYSTEM

These transceivers feature a digitally synthesized dual VFO system which provides tremendous flexibility in day to day operation. For example, one VFO may be set up in the SSB portion of the band, and the other in FM sub-band for immediate QSY when changing modes.

### CONVENIENT FEATURES

Among the many features adding to the convenience of the transceiver is a supplied portable antenna, a high-performance Morse blaster, a high/low power switch. A clarifier allows you to follow unstable or Doppler shifted signals.

### FT-290R

**Frequency coverage (MHz):**  
144-146 or 144-148

**Modes of operation:**  
SSB (USB, LSB) CW & FM

**Synthesizer steps:**  
SSB/CW : 100Hz/1kHz  
FM : 12.5/25kHz

**Sensitivity (better than):**  
SSB/CW : 0.5µV for 20dB SIN  
FM : 0.25µV for 12dB SINAD

**Selectivity:**  
SSB/CW : 2.4kHz @ -6dB  
          : 4.1kHz @ -60dB  
FM : 14kHz @ -6dB  
     : 25kHz @ -60dB

**Repeater split:**  
600kHz (+ and -)

**Tone burst frequency:**  
1.750Hz

### GENERAL FEATURES

**Power Output:** 2.5 Watts at 12VDC

**Frequency response:** 300-2,700Hz @ -6dB

**Carrier Suppression:** Better than -40dB

**Sidband Suppression:** Better than -40dB

**FM Deviation:** +5kHz (max)

**Spurious radiation:** Better than -60dB

**Intermediate frequencies:** 1st IF 10.81MHz  
2nd IF 455kHz (FM)

**Image rejection:** Better than -60dB

**Audio output:** 1 Watt @ 10% THD

**Audio output impedance:** 8 Ohms

**Antenna:** SO239 on rear

**Dimensions:** 58H x 150W x 195D mm  
1.3kg (without cells)

**Current consumption:** 70mA receive  
800mA Tx (2.5W RF FM)

**Power requirements:**  
8 x C size dry cells  
8 x C size Nicad cells  
External 8.5-15.2VDC  
Memory backup: Lithium cell

**Microphone:** (YM47 supplied)  
600 ohms p.p.t with scan

### FT 690R

**Frequency coverage (MHz):**  
50-54

**Modes of operation:**  
USB, CW, AM & FM

**Synthesizer steps:**  
SSB/CW/AM : 100Hz/1kHz  
FM : 10/20kHz

**Sensitivity (better than):**  
SSB/CW/AM : 0.5µV for 20dB SIN  
FM : 0.25µV for 12dB SINAD

**Selectivity:**  
SSB/CW : 2.4kHz @ -6dB  
          : 4.1kHz @ -60dB  
AM : 4kHz @ -6dB  
FM : 16kHz @ -60dB  
     : 25kHz @ -60dB

**Repeater shift:**  
1MHz (+ & -)

## SO WHY NOT GET OUT AND ABOUT



FT203R/703R

|         |                          |              |
|---------|--------------------------|--------------|
| FT203R  | 2M Thumbwheel            | from £195.00 |
| FT703R  | 70cm Thumbwheel          | from £229.00 |
| FT209R  | 2M Keyboard              | from £239.00 |
| FT709R  | 70cm Keyboard            | from £255.00 |
| FT209RH | 2M Keyboard (High Power) | from £245.00 |
| MH12A2B | Speaker/Microphone       | £ 20.00      |
| YH2     | Headset                  | £ 17.00      |
| MMB21   | Mobile Hanging Bracket   | £ 9.00       |
| NC9C    | Mains Charger (FNB3)     | £ 9.60       |
| NC18C   | Mains Charger (FNB4)     | £ 10.00      |



FT209R/709R

## WITH A YAESU HANDPORTABLE!

**★ FREE FINANCE**  
On many regular priced items SMC offers Free Finance (on invoice balances over £120) 20% down and the balance over 6 months or 50% down and the balance over a year. You pay no more than the cash price! details on eligible items on request.

**SMC SERVICE**  
Free Securitor delivery on major equipment. Access and Barelayard over the phone. Biggest branch agent and dealer network. Securitor 'B' Service contract at £5.00. Biggest stockist of amateur equipment. Same day despatch possible.

**GUARANTEE**  
Importer warranty on Yuesu Musen products. Fully staffed and equipped Service Department. Daily contact with the Yuesu Musen factory. Tens of thousands of spares and test equipment. Twenty-five years of professional experience.  
• 2 Year warranty on regular priced Yuesu products.



AGENTS: JOHN DOYLE, TRANSWORLD COMMS, NEATH (0639) 52374 OAY (0639) 2942 EVE and JACK McVICAR, SCOTCOMMS, EDINBURGH 031-657 2430

# BARGAIN PAGE

## COLLECTION OF THIS MONTH'S SMC BARGAINS



### H.F. TRAPS

The SMC Traps are professionally made to the same standards as we supply to government users throughout the world.  
3.5-28MHz 1000p.p. **£15.99**  
Top band Space Savers £18.40 p.p. **£2.20**

### TELO MASTS

Telescopic 10ft Sections, guyed

Most only  
30ft £39.10 can **£5**  
40ft £63.25 can **£6**  
50ft £78.20 can **£8**

Complete Rigging Kits  
30ft £45.00 can **£4.50**  
40ft £56.35 can **£5**  
50ft £72.45 can **£8**

### BOOM MICROPHONE HS-MX1

High quality Boom Mic.  
Compatible with most radios.  
VOX operation-adjustable gain.  
Up and Down Scan Buttons.  
P.T.T. with Lock Position.  
All gearlever mounted.  
On control box.  
All Black Finish.

**£37.95 inc VAT + £1.00 p.p.**

TEMPO 2002 2m 2 x 8874 tubes  
100w max drive. 800w + O/P  
240VAC 50Hz. S/H 2pcs

**£725 + VAT.**  
TEMPO 2002A 2m 1 x 3CX x B00A7  
25W drive 800w + O/P. NEW 1pc  
only **£1150 + VAT.**  
TEMPO 2004A 70cms  
1 x 3CX x 800A7 25W drive  
700w + O/P. NEW 1 pc only  
**£1150 + VAT.**

### BASE VNA

SQ144

The incredible 2M Swiss  
Quad shown vertically  
mounted 16dB gain. F/B  
Now only **£59**  
p.p. **£2.85**

## FASTEST MAIL ORDER—LARGEST STOCKS AND RANGE IN EUROPE

### SPEECH PROCESSOR



SP4 HF Audio to Audio  
adjustable clipper  
now only **£29**

### DIGITAL M/METER

#### KO200

LCD multimeter  
DC V 200mV-1kV  
AC V 2 600V  
OHMS 200-20K  
1200ma IAC/OCI  
Only **£29.95** carriage free

### COAX CABLE

Quality British Cable

LOF2 50R **£3.22/M**  
LOF4 50R **£3.91/M**  
UR41 50R **31p/M**  
UR76 50R **32p/M**  
UR67 50R **69p/M**  
UR70 75R **32p/M**  
UR39 75R **56p/M**  
UR57 75R **71p/M**  
Carriage £1 up to 20Mts  
**£2.50** over 20Mts

### COAX RELAYS



CX120A Cable Entry **£16.90**  
CX520D 3 "N" **£44.85**  
CX540D 3 BNC **£44.85**  
CX600N 3 "N" **£44.85**  
CX600N 4 "N" **£66.50**  
All p.p. **£1.50**

### COAX SWITCHES



SMC2U 2 Way 50R **£11.95**  
AN2 AN3  
p.p. **£1.65**

## SEND FOR OUR 30 PAGE STOCK P/LIST WITH YAESU COLOURED LEAFLETS

### GEM QUAD

The strong Boomless Quad  
10-20Mtrs. Send for more details

GQ2E 2 ELE **£299.00**  
GQ3E 3 ELE **£536.00**  
GQ4E 4 ELE **£745.00**

p.p.  
**£5.90**  
**£9.20**  
**£10.00**

### MAST COUPLERS



2" Dia 15" galv joining  
sleeve  
SMC59 **£6.84**  
p.p. **£2.65**

### MAST CLAMPS



Mast to boom  
SMC31-2" 10-1-1/2" **£2.58**  
SMC53 1-2" 10-1" **£2.00**  
CP1 Heavy Duty 2" 10-2" **£5.75**

### WALL BRACKETS



Quality Galvanised  
W12" **£8.34** p.p. **£2.95**  
W18" **£10.64** p.p. **£3.75**  
W21" **£19.50** p.p. **£3.75**  
W24" **£13.23** p.p. **£3.75**

### HF BALUN



1:1 3-30MHz  
50ohm 1kW  
**£33.99**  
p.p. **£2.00**

## ANTENNA—TOWERS—ROTATORS & ACCESSORIES 50p p.p.

### MOBILE ANTENNAS

118M11/8 x 7dB **£39.85**  
88F8/8 x 5.2dB **£22.95**  
78F7/8 x 4.5dB **£16.95**  
2NES/8 x 3dB **£7.95**  
SOCA CABLE ASSEMBLY **£5.65**  
GCCA Gutter Clips w/ Cable  
p.p. Antenna & Assy. **£2.50**



### JAY BEAMS

#### HF Beams


TB3 3ele 10-20M **£212**  
TB2 2ele 10-20M **£143**  
TB1 1ele 10-20M **£77**  
Delivery **£5**

### ROTATORS




OSCAR FU200  
Super Bargain  
Full sized only **£49.95**  
p.p. Free

### MET ANTENNAS



144/19T 2M 14 2dBd **£55.88**  
432/17X 70cm 13.4dBd  
Xele **£49.17**

### POWER METERS



T3-170L  
Best Value 3.5-170MHz  
Relative power **£17.25**  
p.p. Free

## SMC AT HANTS, DERBYSHIRE, STAFFORDSHIRE, YORKSHIRE

### POWER SPLITTERS

High Quality Construction  
MARLIN ENGINEERING

144MHz 2 way **£30.65**  
144MHz 4 way **£33.75**  
432MHz 2 way **£29.15**  
432MHz 4 way **£31.80**  
1296MHz 2 way **£24.55**  
1296MHz 4 way **£25.70**  
M.E.T.  
144MHz 4 way **£28.75**  
432MHz 2 way **£19.55**

### QUALITY VALVES

6JS6C NEC **£11.90**  
6KD6 GE/NEC **£7.48**  
61468 National/GE **£12.85**  
12BY7 RCA **£4.55**  
6AN8A Toshiba **£2.99**  
6AW8 Toshiba **£2.87**  
p.p. one £1 any No. **£1.50**

### DISCONES

GDX1  
GDXA 100-440MHz **£41.85**  
GDX1 80-480MHz **£49.50**  
GDX2 50-480MHz **£62.85**  
VHF 65-520 RX only **£19.60**  
p.p. **£2.85**

### POLAR PHASER



The SMC ultimate in polarisation  
control. This revolutionary  
product will control your cross-  
ed Yagi RH-LH Cnc. Vector Hor  
whilst TX 2M 100W VSWR  
<1.5:1 50239N.  
ONLY **£54 inc p.p.**

## HUMBERSIDE, CO DOWN, CLWYD, JERSEY OR WRITE FOR MORE DETAILS

### COAX INTER CONNECTOR



UG255 VHS-8NCP **£1.85**  
UG273 UHF-P-BNCS **£1.85**  
UG146 UHF-S-N-P **£2.85**  
UG83 UHF-P-N-S **£2.85**  
50/NF UHF-S-N-S **£2.85**  
UG201 N-P-BNCS **£3.45**  
UG349 N-S-BNCP **£3.45**  
UG606 N-S-BNCS **£3.00**  
p.p. **£5.50**

### MORSE TUTORS



Datong D70 go anywhere  
battery powered **£55.65**  
M/M Morse talker **£115**  
M/M Morse Caller **£169**

### MORSE KEYS



HK703 Straight Key **£29.35**  
HK704 Straight Key **£19.95**  
HK706 Straight Key **£16.65**  
HK707 Straight Key **£15.50**  
p.p. **£1.50**


### CRYSTAL FILTERS

10.7MHz  
F10.7H600, CW 600Hz **£12.50**  
F10.7F2.4, SS8 2.4KHz **£12.50**  
F10.7H12, FM 12KHz **£10.00**  
USB/LSB/KAM, CW, FMI  
XTALS **£5.00**  
9MHz  
F90H600, CW 600Hz **£12.50**  
F90F2.4, SS8 2.4KHz **£10.00**  
Postage and packing **£2.50** any quantity

F90H12, FM 12KHz **£12.50**  
USB/LSB XTALS **£2.50**  
FT101 I, II, III, 8, E  
F30F350, CW 350Hz **£15.00**  
F30F600, CW 600Hz **£15.00**  
F30F12, FM 12KHz **£7.50**  
F30H12, FM 12KHz **£10.00**

## SMC FOR THE BEST DEALS & HYGAIN J BEAM DATONG BNOS ETC

### HANSEN POWER METERS—WIDE RANGE



SWR31 3.5-150MHz 20/200/1000W 11xW HF on 11 **£42.25**  
SWR39 3.5-150MHz 20/200/1000W 11xW HF on 11 **£42.25**  
FSSE 3.5-150MHz 20/200/1000W 11xW HF on 11 **£18.85**  
FSSE 3.5-150MHz 20/200/1000W 11xW HF on 11 **£28.15**  
FS200 3.5-150MHz 5/20W Dummy SWR Power **£42.65**  
FS201A 3.5-150MHz 11/10W Dummy SWR Power **£42.65**  
FS210 1.8-150MHz 20/200W Auto SWR/Power **£65.50**  
FS300V 50-150MHz 20/200W Power **£52.50**  
FS301V 2-30MHz 20/200W Power **£42.25**  
FS301V+ 2-30MHz 20/200W Power **£42.25**  
FS500V 1.8-60MHz 20/200/2000W Power P.E.P. **£18.85**  
FS601V 1.8-30MHz 20/200W Power P.E.P. **£28.15**  
FS110V 50-150MHz 15/150W P.E.P. Auto SWR **£101.80**  
FS211V 2-30MHz 20/200W Head Display **£42.65**  
FS211V 50-150MHz 20/200W Head Display **£42.65**  
FS200 1.8-150MHz 6/30/1150W Dummy SWR Power **£103.85**



FS-500H

## MAIL ORDER SMC or SHOWROOMS

see previous pages



# RADIO SOCIETY OF GREAT BRITAIN

## THE NATIONAL SOCIETY REPRESENTING ALL UK RADIO AMATEURS

Founded 1913

Incorporated 1926

Limited by guarantee

A member society of the International Amateur Radio Union

PATRON: HRH PRINCE PHILIP, DUKE OF EDINBURGH, KG

Membership is open to all those with an active interest in radio experimentation and communication as a hobby. Applications for membership should be made to the general manager, from whom full details of Society services may also be obtained.

Headquarters and registered office: Lambda House, Cranborne Road, Potlery Bar, Herts EN6 3JE

Telephone 0707 59015. Telex 25280 (RSGBGH G)

Secretary and general manager: O A Evans, G3OUF

### COUNCIL OF THE SOCIETY

PRESIDENT: W J McIlIntock, MSc, G3VPK

EXECUTIVE VICE-PRESIDENT: K E V Willis, BSc, ARCS, CEng, MIEE, G8VR

IMMEDIATE PAST-PRESIDENT: J Heathershaw, G4CHH (Mrs)

HONORARY TREASURER: P F D Cornish, FCA, G3COR

ORDINARY MEMBERS OF COUNCIL

E J Allaway, MB, ChB, MRCS, LRCP, G3FKM

D S Evans, PhD, FIM, CEng, G3RPE

J D Heys, G3BDQ

A McKenzie, MBE, CEng, FIERE, FAES, G3OSS

B O'Brien, G2AMV

N F O'Brien, FAI, FSCA, ACIS, MIMI, G3LP

F S G Rose, G2DRT

ZONAL MEMBERS OF COUNCIL

Zone A (Regions 1, 2 and 18)

D S Smith, G4DAX

Zone B (Regions 3, 4 and 5)

H S Pinchin, BSc, MBIM, G3VPE

Zone C (Regions 7, 8, 16 and 19)

J Greenwell, AMIEE, G3AEZ

Zone D (Regions 6, 9, 17 and 20)

J N Gannaway, G3YGF

Zone E (Regions 10 and 11)

E J Case, GW4HWR

Zone F (Region 15)

J T Barnes, G13USS

Zone G (Regions 12, 13 and 14)

F Hall, GM8BZX

### REGIONAL REPRESENTATIVES

Region 1 B Oonn, G3XSN, tel 051-722 3644  
(Cheshire, Cumbria, G Manches, Lancs, Merseyside)

Region 2 P R Sheppard, G4EJP

(Humberide N of Humber; N, S and W Yorks)

Region 3 G Ross, G8MWR, tel 0203 616941

(Hereford & Worcs, Salop, Staffs, Waiks, W Midlands)

Region 4 M Shadlow, G3SZJ, tel 0332 556875

(Derbys, Humberide S of Humber, Leics, Lincs, Notts)

Region 5 J S Allen, G3OOT, tel 0582 21151

(Beds, Cambs, Northants)

Region 6 (Post vacant)

(Berks, Bucks, Oxon)

Region 7 R Sykes, G3NFV, tel 0372 372587

(G London S of Thames, Surrey including part of London

N of Thames administered by Surrey)

Region 8 M Elliott, G4VEC, tel 0795 70132

(Kent, E Sussex, W Sussex)

Region 9 A H Hemmell, G3VWK

(Cornwall, Devon)

Region 10 (Post vacant)

(Dyfed, Gwent, Powys; Mid, S and W Glam)

Region 11 B H Green, GW2FLZ, tel 0492 49268

(Clwyd, Gwynedd)

Region 12 M R Hobson, GM8KPH, tel 0796 2140

(Glamorgan, Highland, Island Authorities, Tayside)

Region 13 A J Scott, GM8BOX

(Borders, Fife, Lothian)

Region 14 T G Wylie, GM4FOM, tel 0505 22749

(Central, Dumfries & Galloway, Shetland)

Region 15 R R Parsons, G13HXV, tel 0232 612322

(Northern Ireland)

Region 16 A Owon, G4HMF, tel 0473 51319

(Essex, Norfolk, Suffolk)

Region 17 T M Emery, G3KWU, tel 0703 812435

(I o Wight, Channel Is, Dorset, Hants, Wilts)

Region 18 I Gibbs, G4GWB, tel 0670 790090

(Cleveland, Durham, Northumberland, Tyne & Wear)

Region 19 R J Broadbent, G3AAJ, tel 01-989 6741

(G London N of Thames, Herts)

Region 20 (Post vacant)

(Avon, Gloucesters, Somerset)

### HONORARY OFFICERS

Aerial Planning Panel co-ordinator: John MSO, RSGB HQ

Audio Visual Library co-ordinator: R G Auckland, G2PA

Awards managers: HF: P Miles, G3KOB; VHF: Jack Hum, G5UM

HF manager: E J Allaway, G3FKM

Microwave manager: O S Evans, G3RPE

Observation Service organizer: R J Osborne, G4FJN

Slow morse practice transmissions organizer: (Post vacant)

Trophies manager: Miss H Claydon-Smith, G4JKS

VHF manager: K A M Fisher, G3WSN

Correspondence to RRs and honorary officers should be addressed directly to them (QTH), not to RSGB HQ

### ANNUAL SUBSCRIPTION RATES

Corporate member: UK and overseas (Radio Communication by surface

mail): £16.50.

UK associate member under 18: £6.20. Family member: £6.60

UK students over 18 and under 25: £9.30 (Applications should give applicant's

age at last birthday date and include evidence of student status)

Affiliated club or society/registered group (UK): £16.50 (including Radio

Communication); £9.90 (excluding Radio Communication)

(Subscriptions include VAT)

## EDITORIAL

### THE AMATEUR AND THE GOVERNMENT

There has been a recent change in policy on the part of the Radio Investigation Service of the Department of Trade & Industry, which could have a significant impact on many radio amateurs in the UK. This change relates to the amateur/neighbour breakthrough situation, and has been prompted by the further withdrawal of services from the domestic scene by the field staff of the RIS.

Since late January a number of members have reported receiving a new standard letter from their local RIS office when breakthrough has been reported in their vicinity. The letter assumes that the amateur is involved and suggests ways in which EMC (electromagnetic compatibility) problems can be solved. However, it concludes by saying: "... let me know within the next month if you have resolved the problem ... to your neighbour's satisfaction. If this is not the case, the RIS will visit you to inspect your station and determine what action should be taken. In certain circumstances the Department may need to consider varying your licence". The amateur's neighbour also receives a copy of this letter.

There is clearly little incentive for the unco-operative neighbour to assist, since as there is a veiled threat to the amateur that his/her licence may be varied, the neighbour could be forgiven for believing that the amateur is at fault. A licence variation is likely to be a permanent restriction, either in operating times or a reduction in power. The Society believes that this approach is very heavy-handed and that if the RIS follows this course of action, it could lead to an illegal exercise of the powers of the Secretary of State to vary a licence.

After the Society had complained to the DTI (in a letter dated 24 January 1986) about this policy, the DTI (in a letter dated 27 January 1986) sent the Society a copy of the policy document which had already been sent to the RIS field staff. The DTI letter contained phrases such as "new guidelines", "we would welcome an early meeting to discuss them", "of course we shall be more than happy to consider any alterations you may think desirable", and "we believe they strike a fair balance". We seriously wondered why, on the one hand, the RIS wanted to meet the Society to "consider happily" any alterations the Society thought to be desirable but, on the other hand, had gone ahead and issued the new guidelines to their field staff prior to any consultation process.

The Society did call for a meeting with the DTI. This meeting was scheduled for 20 February, prior to which a number of internal RSGB meetings took place to co-ordinate and brief all the Society officers who would be involved in handling this situation. The main thrust of this work has to date been dealt with by HQ staff together with the chairmen of the Society's EMC and Licensing Advisory committees. Other committees are involved to a lesser extent.

At the meeting with the DTI on 20 February the Society expressed the view that the new RIS guidelines were hopelessly out of touch with reality; we therefore offered to draft a new policy document for the RIS to consider. This course of action would not be unprecedented; it is similar to the situation which arose in 1982, following the publication by the DTI of a new and manifestly

(Continued overleaf)

## EDITORIAL—continued

unworkable schedule to the amateur licence—which also was not the subject of consultation with the Society. DTI staff at the meeting would not agree to the Society's request to scrap the new RIS guidelines, although they did offer the Society a revision of the standard letter to amateurs, together with a new letter intended for the amateurs' neighbours. Although these new drafts are something of an improvement, the Society is, as we went to press, considering its position and is also preparing detailed comments on the RIS guidelines.

Although this editorial is intended as an overview of the situation which has just developed, it is worth considering some of the wider aspects of the problem.

Firstly, the Radio Investigation (Interference) Service itself. This service was transferred from British Telecom to the DTI in 1984 under the terms of the Telecommunications Act 1984. Unfortunately, the DTI decided, against the best advice of the Society, to cut-back drastically on the service as a means of saving money. The cut-backs took the form of a deliberate withdrawal from the day-to-day business of the resolution of domestic problems: the remaining staff were left to deal mainly with the enforcement aspects of spectrum abuse. Although the Society took part in—and is on record as asking for the results of—the RIS review (see this month's *RSGB News Bulletin*), we were informed that this "internal review document" was not available to us. As such, the Society has not been in a position to assess the extent in which the RIS staff were likely to be able to act as mediators in the amateur/neighbour situation. However, when the Society complained again that it had not, in its view, been properly consulted or advised on RIS changes at the meeting with the DTI on 20 February, a copy of the RIS review document was passed across the table to us. Better late than never!

Secondly, there is the question of immunity standards for domestic entertainment equipment. No immunity standards are imposed on UK manufacturers at present, but the British Standards Institute has recently produced a standard, BS905, which offers some limited protection. However, BS905, is now

not going to be introduced because an international organization called CENELEC is working on a similar standard of immunity which is likely to be introduced by the EEC in one or two years' time. If the EEC does adopt the CENELEC standard, the UK apparently has to adopt it regardless of any previously-existing UK standard which might have been either better or worse than the CENELEC one. Common standards in the EEC are introduced to prevent unfair competition—never mind, it seems, that the introduction of such standards in one country might be unfair to radio amateurs or other transmitter users.

The new CENELEC standard defines immunity in terms of a television or radio receiver being able to operate without noticeable breakthrough occurring in the presence of a radio transmitter which produces a field strength of 1.8V/m (approx) at the receiver site. In terms of a typical UK urban environment, 1.8V/m is not a very high standard of protection. If this standard was to be used as a means of apportioning blame, as the DTI seem to believe it should be, most users of radio transmitters would be likely to run foul of it. Later, other electrical equipment may well fall within the scope of CENELEC.

**The Society considers the standard to be arbitrary, and cannot accept that the operation of an amateur station should be determined by reference to this arbitrary standard.**

The Society is currently exploring every aspect of this situation with a view to finding a sensible solution. However, even at this early fact-finding stage, one thing is very clear: this is emphatically a time for all members to lend their utmost support to the Society's work, and for UK radio amateurs who are not members to join now. Attaining a proper solution to this matter may well involve litigation, costing a great deal of money. Even if this proves unnecessary we are still likely to need to draw on resources which were earmarked for other things—with the inevitable knock-on effects.

Finally, all members are asked to inform the Society immediately if they receive a letter from the RIS, in particular ones threatening to vary a licence. The letter should be copied and sent by first-class post to: "The Secretary—RIS" at RSGB HQ.

David Evans, G3OUF

# Amateur Radio News

## Publication date of Radio Communication

In dealing with queries from members concerning late delivery of *Radio Communication* over the past two months, it has become obvious that a considerable number of members do not know the official publication date of the magazine. Many seem to believe that this is the first day of the month of issue, when it is of course the first Friday of the month—as published on the title page.

In the case of the February and March issues, the first Friday was the 7th of the month, with the result that those members were even more aggrieved when their copies were "delivered late" by the Post Office. For the record, the February issue was posted on 5 February, and the March issue on 3 March, but deliveries by the Post Office were, as usual, widely spread.

Members will recall that we asked for delivery reports on the November 1985 issue, and our belated thanks are extended to the 633 members who responded. It had been intended to publish the results of this sample survey in the February issue, but this was delayed by the editor's spell in hospital in December.

From the two per cent sample of UK members who contributed to this survey, the following

table gives the number, and percentage who received their copies between 1 and 22 days after the issue was posted on 29 October:

| Days | No  | %   | Days | No | %   |
|------|-----|-----|------|----|-----|
| 1    | 10  | 1.5 | 10   | 3  | 0.5 |
| 2    | 53  | 8   | 11   | 2  | 0.3 |
| 3    | 95  | 15  | 13   | 2  | 0.3 |
| 4    | 214 | 34  | 14   | 4  | 0.6 |
| 6    | 157 | 25  | 18   | 1  | 0.1 |
| 7    | 57  | 9   | 20   | 1  | 0.1 |
| 8    | 22  | 3   | 22   | 1  | 0.1 |
| 9    | 11  | 1.7 |      |    |     |

The distance between the Maidstone, Kent, posting office and the destination of individual copies bore no relationship to the number of days taken to deliver them. In fact, some of the worse-served were those living in Kent! This delivery pattern is similar to that revealed in a wider survey carried out in September 1979.

In order yet again to take up this unsatisfactory delivery service with the Post Office, UK members are receiving a questionnaire card with this issue which all are asked to complete and return so that a much wider survey of delivery patterns can be made.

## Large-user postcode for HQ

A large-user postcode has been issued to RSGB HQ; this is EN6 3JE. Members are asked to use this postcode when writing to HQ.

## Stolen equipment

From the QTH of G4LUA: Kenwood TS770E, serial No 1020604; Icom IC260E, serial No 10504406; Microwave Modules MMT1296/144 transverter; Bird 43 power meter with 1,000W 100-250MHz and 10W 400-1,000MHz inserts; home-built 144MHz linear amplifier containing 2 x 4CX250B valves in grey box; Kenwood SP70 extension speaker, serial No 0010059. Information to G4LUA, QTHR.

On 28 February 1986, from a motor vehicle in the Scarborough/Whitby area: Yaesu FT290R, serial No 1/060686, and Sharp car radio/cassette model No RG5900E. Information to police, tel 0723 363333, or G4APA, QTHR.

## RAF Civilian Wireless Reserve Net

The monthly net for ex-members of the above has been transferred to the RAFARS frequency of about 3,710kHz. The net takes place on the first Monday of every month ssb at 10am.

Sid Hall, G3BR—controller

## Wirral ARS jubilee

The Wirral Amateur Radio Society will celebrate its golden jubilee with a dinner/dance to be held at Heswall on Saturday 10 May 1986, at 7 for 7.30pm. Details and tickets are obtainable from G2AMV QTHR.

## VHF COMMITTEE VACANCIES

The RSGB VHF Committee wishes to fill two vacancies for full members, and one for a corresponding member which currently exists in the committee.

### Post 1.

To carry out an extensive and detailed investigation into the possibilities for a move from 25kHz to 12.5kHz channel spacing for fm and repeaters in the 144MHz band. With overcrowding on the 144MHz fm channels in some parts of the country now reaching very high levels, the VHF Committee wishes to investigate fully the possibilities and problems involved in a move towards 12.5kHz channel spacing. The study will comprise three parts:

- (i) A technical investigation into co-channel and adjacent channel performance of 25kHz and 12.5kHz spacing equipment, concluding in an estimate of the increased capacity expected from a move to 12.5kHz spacing.
- (ii) A survey of currently-used equipment on the 144MHz band to identify the proportion of equipment which can work at 12.5kHz spacing, and the proportion which cannot, through design of its transmitter or receiver, be modified for 12.5kHz spacing. The review shall include a full list of modifications required for

a number of popular equipments and the costs to the amateur of modification.

(iii) An outline plan of how a move to 12.5kHz channel spacing could be achieved, including the changing of all repeaters. This plan should highlight expected problems (such as interference between 25kHz and 12.5kHz equipment), and how they can be minimized by frequency planning.

### Post 2. Exhibitions manager

The VHF Committee currently organizes the National VHF Convention at Sandown Park, is closely associated with the Midlands VHF Convention in Telford, and also participates in the RSGB National Amateur Radio Convention at Birmingham's NEC. At all these events the committee sets up and mans a display stand featuring some chosen aspect of vhf/uhf (in 1985 this was the 432MHz band, in 1986 the 50MHz band). To relieve loading on other members of the committee, an exhibitions manager is required to:

- (i) organize the committee display stand at all events—this will include liaising with the event organizers to ensure the stand is built as required, and is provided with the required tables/chairs etc;
- (ii) organize the manning of the stand at all events—attendance by the manager himself at all events is mandatory;
- (iii) at the Sandown Convention, to liaise with other participating committees and RSGB staff to ensure that the combined stand is built as required by all parties—in addition, to be responsible for lecture room signposting etc.

### Post 3. Syledis research

The Syledis system is a radiolocation system operating in the 430MHz region, primarily by the oil exploration business. Permanent chains are established on North Sea coasts, in the English Channel, and in other areas. Interference to amateur operation in the 432MHz band is, in some cases, quite severe. The VHF Committee wishes to recruit someone, preferably with knowledge of the Syledis System, to investigate the technical parameters of the system, and to advise the committee of ways of minimizing interference both to and from the system.

The successful applicants for posts 1 and 2 will become full members of the VHF Committee, and for post 3 will become a corresponding member. Since the committee deals with a large number of far-ranging matters, applicants should ideally be interested in many aspects of vhf/uhf, and be prepared to offer their views on fields outside their normal duties.

The committee meets about eight times a year, normally in London on Saturday afternoons. Members are entitled to claim out-of-pocket expenses, but are otherwise unpaid. Corresponding members will normally only attend meetings by prior agreement of the chairman. Applications should be made, in writing, to the chairman of the VHF Committee, Malcolm Appleby, G3ZNU, "Willowbank", Chapel Road, Olney, Ipswich IP6 9NX. Applicants should include a brief cv, highlighting their interests in vhf/uhf, and also state what other qualities they could bring to the post.

## THE OLDEST LOCAL RADIO CLUB

The Derby & District Amateur Radio Society (incorporating Derby Wireless Club 1911) is celebrating its 75th anniversary throughout 1986.

The esteem in which the Society is held by the city of Derby is possibly best expressed by the fact that the Mayor of the city hosted a reception in the Council House at Derby on 8 January 1986, when permission was also granted for an amateur radio station to be set up in the council chamber, thus enabling the club chairman Richard Buckby, G3VGW, to establish prearranged radio contacts with the twin cities of Osnabrück in Germany, Angers in France and Haarlem in Holland.

There have also been stations on the air from the clubroom at 119 Green Lane, Derby, on four weekends to date, and a series of special event stations are planned from a variety of locations within the city throughout the year, all using the special call signs GB2ERD, GB3ERD and GB4ERD.

There is a special Anniversary Award available in the form of a commemorative certificate, issued in conjunction with the city council. To obtain the award, stations in the UK are required to contact one of the special event stations and four other stations in Derby; amateurs outside the UK have to work one of the special event stations and two other stations in Derby.

All contacts must be made during 1986. Claims, with a copy of log details certified by two other radio amateurs, and a 9 by 6in sae plus 75p (UK) or five irs (outside UK) should be sent to the anniversary organiser: Ken Griffin, G4HDP, 97 Woodlands Road, Allestree, Derby DE3 2HH. Special QSL cards are to be issued for contacts with the special calls, and claims should be sent via the QSL Bureau or to G4HDP at the address above.

The Mayor and Mayoress of Derby, Councillor and Mrs Harry Matthews are shown the GB3ERD station to D&DARS chairman Richard Buckby, G3VGW (l), and hon treasurer Martin Shadlow, G3SZJ



## RAYNET SYMPOSIUM

Strathspey Hotel  
Aviemore

3 May 1986

Open to all radio amateurs  
interested in emergency  
communications

### THEME:

#### Co-ordination and Communication

- 1000 Coffee  
1030 "Co-ordination", Geoff Griffiths, G3STG, chairman, Raynet Committee  
1145 "Coastguard co-ordination and communication", Mr Howard, district controller, HM Coastguard  
1245 Lunch  
1400 "Communication and co-ordination on the Cairngorm Mountain Rescue Team", John Allen, deputy leader, CGMRT  
1500 Open forum, Raynet and user services  
1600 Coffee, followed by informal chat

Why not make a Bank Holiday weekend of it. Facilities for all the family at the Aviemore Centre.

Further details from GM3RFA,  
tel Fort William (0393) 3833.

## Communications & Electronics Museum now has charitable status

Charitable status has now been granted to the Communications & Electronics Museum Trust, which incorporates the Winbolt Collection and the Wireless Museum on the Isle of Wight. The museum was featured on page 163 *Rad Com* March 1986. The curator is G3KPO, tel Ryde (0983) 67665.

## BATC RALLY/SHOW

Post-House Hotel  
Crick, Nr Rugby

4 May 1986

### The annual amateur tv show

Full lecture programme

Seminar on amateur tv repeaters conducted by Graham Shirley, G3VZV, Paul Elliott, G4MOS, BATC Committee member and special projects manager of the RSGB Repeater Management Group will attend.

BATC biennial meeting at 4.30pm.  
Trade stands. Members' stands.

Details of rally from G4PDZ, tel Leicester (0533) 553293 (shop hours) or 0533 871066 (evenings).

Details of seminar from G3VZV, tel 0525 210011. BATC Information from G8CJS, tel 0532 670115.

Special rates for overnight accommodation. Tel 0788 822101 for bookings (indicate you are attending the show, and book early).

## Special Event Stations

All information for inclusion in this column must be sent to the editor, not to RSGB HQ.

### 1986, GB4MTR

GB4MTR will be operated during 1986 on the 70MHz band by 13 different stations each in a different county. The call sign will be operated from the station of G4ENB between 26 March and 22 April.

Volunteers to run these stations are required, particularly from the north of England. An award will be available. For further details contact G4WNO or G4SEU.  
1-28 April, GB4SJC

Celebrates the 150th anniversary of St James Church, Brightlingsea, on 3.5, 7, 14, 21 and 144MHz fm. Station will transmit in cw, ssb, rly on hf, and will be particularly looking for contacts with stations having associations with the Cinque Port Liberty and all religious denominations.

### 5 April, GB4JAG

Celebrates the 30th anniversary of the founding of Jaguar Drivers Club in 1956, at Silverstone Motor Racing Circuit, Northants. Station operated by Milton Keynes & DARS and Area 44 of JDC. Activity on hf 144MHz ssb. Special OSL cards, reports from swls acknowledged. Details G6RSC, tel Milton Keynes 510087.

### 5-13 April, GB4WAB

Celebrates the 50th anniversary of Cannock Chase ARS. Operation on all bands. Special OSL cards and award. Details G0BXN, tel 0543 77558.

### 16-17 April, GB2IPA

Celebrates the 30th annual convention of the International Police Association to be held in Jersey this year. In addition to live points for the Sherlock Holmes and other IPA awards, it will also be a rare chance to work the parish of St John. Transmission on 14, 7 and 3.5MHz. Also 144MHz, conditions permitting. Details GJ4TXB.

### 8-11 May, GB2WAF

Meopham Parish RC will be operating from the tower of the ancient parish church of St George, Wrotham, Kent during the 3rd Wrotham Arts Festival. Activity will be on hf and vhf amateur bands. Details G4XNU and G1KEY, tel 0732 822541.

### 10, 11 May, GB4HSC

Operated by Dudley ARC from Himley Hall, Dudley, in connection with sponsored sail by Himley Sailing Club, in aid of the RNLI. Transmission on all modes, rly, hf, vhf, and Fast Scan tv. Details G4NRA, tel 0384 278300.

### 10-17 May, GB4LI

Six members of the Nene Valley RC will activate GB4LI from the Old Lighthouse, Lund Island (WABSS14). Operation on all hf bands; limited facilities for 144MHz and 432MHz. Special OSL cards. Details G4NWZ.

### 23-26 May GB4IOS, GB8IOS

Cornish radio amateurs operating in aid of the RNLI from the Island of Greal Gannily. Looking in particular for sponsors. Operation on 3, 7, 14, 144, 430MHz and as many other bands as is possible. Details G4ZUI, tel 0209 860572.

### June, GB4DH, GB0IOW

GB4DH will be operational from Osborne House, East Cowes, Isle of Wight and GB0IOW will be operational from the Royal Needles Complex, Isle of Wight in commemoration of the 89th anniversary of Marconi Early Experiments 1897, 1898. Both stations will operate for one week in the first week of June. Details V G Scambell, 50 Park Ave, Widley, nr Purbeck, Hants.

### 7 June, GB4LAD

Station run during Luton and Dunstable's Hospital Fete by Dunstable Portable ARG in conjunction with Dunstable Downs RC. Operation on 3.5, 14 and 144MHz, 8am-6pm. Details G0CQO, tel 0582 508259.

### 21 June, GB0PGD

Station operated on Plessey Gala Day, Plessey Sports Ground, Beeston. Organized by the Plessey (Beeston) ARC. Operation on hf and 144MHz. Special OSL cards. Details G4VFK, tel 0602 226321.

### 23, 24 July, GB2WAD

Celebrates the Annual Great Western Air Days, from Beach Lawns, Weston-super-Mare. Operated by members of the Weston-super-Mare RS, 10am-6pm. Transmissions on hf, 144 and 432MHz. Details G1DJW, tel 0934 514429.

### 23-25 August, GB2RSG, GB1RSG

Saga 88, Star & Garter Appeal run by West Middlesex RG. Operational 9am-7pm. Looking for sponsors. Details G1DDR, tel 01-579 7860.

### 1 September, GB2STC

Celebrates the centenary of the official opening of the Severn Tunnel, at Pilning Railway Station. Operational 10am-6pm on hf, 144 and 432MHz. Details G1DJW, tel 0934 514429.

### 25, 26 October, GB2EMR

On the occasion of the International Endurocross Motor Cycle Races, from Beach Lawns, Weston-super-Mare. Operated 10am-5pm each day by members of the Weston-super-Mare RS. Transmissions on hf, 144 and 432MHz. Details G1DJW, tel 0934 514429.

## Mobile Rallies Calendar

All information for inclusion in this column must be sent to the editor, not to RSGB HQ.

### 13 April

Lough Erne ARC Rally, Killyherleyn Hotel, near Enniskillen. Opens 1pm. Talk-in on S22 and SU8. Details from G14CZW, 9 Tanmon Brae, Enniskillen, NI, tel 0365 24500.

### 20 April

East Cleveland ARC 4th Bring & Buy and Mini Rally, Lelsure Centre, Marske-by-the-Sea, Cleveland. 11am-4pm. Talk-in on S22. Free car park and admission. Details G1GMF, tel 0642 474769.

### 27 April

Scunthorpe RC's Radio Rendezvous, Hobbies Centre, Grange Farm, Franklin Crescent, Scunthorpe. Open 11am. Talk-in on 144 and 432MHz. Special event station, GB2HRR. Details G6OSA, tel 0427 873827, evenings.

### 4 May

3rd Anglo-Scottish Rally, Tall Hall, Kelso. Ideally situated for G/GM/GI (GW also welcome!), 11am to 5pm. Talk-in on S22. Details G4UIB or G3VLB, tel 0573 24654 or 0573 24664.

### 5 May

Mid-Cheshire ARS Rally, Winsford, Civic Hall, Open 11am. Talk-in on S22. Details D Card, 7 Globe Green, Winsford, Cheshire, tel 0806 594719.

### 11 May

Drayton Manor Rally, Drayton Manor Park, nr Tamworth. Starts on A4091 one mile south of A5/A4091 junction. Open 11am to 5pm. Talk-in on 144 and 432MHz. G3MAR/A. Details G8BHE, tel 021-422 9787 or G8GAZ, tel 021-357 1924.

### 11 May

Swindon Rally, Oakfield School, Marlowe Ave, Swindon, Wilts. Open 10am. Talk-in on S22 and SU8/GB3TD. Morse tests, refreshments. Details G8SFM, tel 066689 307.

### 18 May

Cambridge & OARC Rally and Boot Sale, Coleridge Community College, Radegund Road. Open 10.30am (disabled 10am)-5pm. Talk-in on S22, G2XV. Admission 50p, children 25p. Free car park. Car boot pitches £4 advance booking, £5 on day. Details G4TRO, tel 0223 353664.

### 18 May 1986

29th Northern Mobile Rally, Great Yorkshire Showground, Harrogate. Details G3COO, tel 0943 602118.

### 25 May

Plymouth Mobile Rally, Plymstock Comprehensive School, Plymouth. Open 10am-5pm. Talk-in on S22. Details G0BNT, tel 0752 777777.

### 25 May

10th Annual East Suffolk Wireless Revival, Civil Service Sports Ground, Bucklesham, nr Ipswich. Open 10am. Free parking. Admission 80p. Details J Toolhill, tel Ipswich 44047. Stand space from Colin Ranson, G8LBS, 100 Stone Lodge Lane West, Beacon Hill, Chantry, Ipswich.

### 1 June

Southend & DRS Mobile Rally, Rocheway Centre, Rochford, Essex. Opens 10.30am. On site parking. Talk-in on S22. RSGB Morse tests to be advised. Details G6SOH, tel 0702 713211 or G4RDS, tel 03745 50494.

### 1 June

Spalding & DARS Rally, Springfields Gardens, Spalding. Opens 10am. Talk-in. Details G4OO, tel 0775 86382.

### 8 June

Elvaston Castle Mobile Radio Rally, Elvaston Castle Country Park, five miles south-east of Derby on B5010. Talk-in by GB2ECR on 144MHz and 432MHz. Details G4PZY, tel 0332 767994, G4CTZ tel 0332 799452 or club HQ 0332 755900. Trade enquiries to G4HIJ, tel Ashbourne 43241.

### 15 June

RNARS Mobile Rally, HMS Mercury, Leydene, near Petersfield, Hants. Details G4DIU.

29 June

28th Longleat Amateur Radio Mobile Rally, Longleat Park, Wiltshire. Preliminary enquiries to G4FRG, tel 0272 848140.

13 July

Sussex Mobile Rally, Brighton Racecourse. Opens 10.30am. Talk-in via GB2SMR on 145.550MHz and 3.5MHz. Details from G8JVE or G4UAW, evenings.

13 July

Worcester & DARC Drollwich Rally, High School, Drollwich. Bring and buy, and events for all the family. Details G8ASO.

20 July

Anglian Mobile Rally, Highwoods Sports Centre, Colchester. Open 10am. Talk-in on 144MHz. Details G6HOL, tel 0206 862403 after 7pm.

20 July

Cornish Radio Amateur Club Rally, Camborne School, Camborne. Open 10am-5pm. Talk-in on S22. NB new OTH. Details G4MSV, tel 0736 763549.

20 July

McMichael Mobile Rally, Haymill Centre, Burnham, Slough. Open 11am. Talk-in on S22 and SU8. Enquiries to G8BTY, tel 0494 29868.

27 July

Scarborough ARS Rally, The Spa, Scarborough. Open 11am. Talk-in 144MHz (S22), and 432MHz (SU8) and RB0-GB3NY. Details G4UOP.

3 August

RSGB National Mobile Rally, Woburn Abbey.

3 August

Rolls-Royce ARC Mobile Rally, Rolls-Royce Sports & Social Club, Barnoldswick, Skipton. Access from A59 and A56. Open 11am. Morse tests available. Enquiries to G4ILG, tel 0282 813271 ext 337, daytime, or 0282 812288 evenings.

10 August

29th Annual Mobile Rally celebrating the 75th anniversary of the Derby Wireless Club, Lower Bemrose School, St Albans Rd (off Derby Ring Road A5111) Derby. Open 10.30am. Talk-in by GB3ERD. Details G4EYM, tel Derby 556875.

10 August

Hamfest '86, Filth Reluelling Sports & Social Club grounds, Merley, Nr Wimborne, Dorset. Details Ashley Hulme, G0C0Y, 71 Victoria Gardens, Ferndown, Wimborne, Dorset BH22 9JO, tel 0202 872503.

17 August

West Manchester RC Red Rose Rally, Haydock Park Racecourse, Newton Le Willows (one mile from M6 junction 23). Open 10am. Talk-in on S22. Details G1IOO, tel 0204 24104 evenings.

24 August

1986 BARTG Annual Mobile Rally, Sandown Park Racecourse, Portsmouth Road, Esher. BARTG Kits Components. Car boot sale. Free car park. Open 10.30am-5pm. Talk-in on S22. Details G8VXY, tel 021-453 2676.

24 August

Preston ARS 19th Annual Rally, Lancaster University. Details G3DWQ, tel 0772 53810.

31 August

Telford Mobile Rally, Telford, Racquet & Fitness Centre, Telford Centre, Shropshire. Details G3UKV, tel Telford 55416 or G8UGL, tel Telford 584173.

7 September

Lincoln Hamfest, Lincolnshire Showground. Further details to be published at a later date.

7 September

Vange ARS Rally, Nicholas School, Basildon. Open 10am-5pm. Talk-in on 144MHz. Details Mrs D Thompson, 10 Feeling Row, Basildon, Essex SS14 1TE, or G4OJN.

21 September

Harlow Mobile Rally, Harlow Sports Centre, Hammarfold Road, Harlow, Essex. Open 10am. Talk-in on S22. Details G4KVR, tel 0279 22365, day, or G3UEG, tel 0279 27788 evenings.

21 September

National ARC Car Boot Sale, The Shillworth Collection, Old Warden Aerodrome, nr Biggleswade. Open 10am-5pm. Talk-in on S22, GB4SC. Aircraft and motor museum. Free car park. Admission 20p. Details and advance bookings G6EES, tel 0562 607623 evenings.

21 September

Peterborough R&ES Mobile Rally, Wlirra Sports Stadium, Bishops Road, Peterborough. Open 10.30am-5pm. Free car parking. Food in the adjacent Tropicana Restaurant. Bar until 3pm. Details G4PNW.

19 October

South Bristol ARC present the Second Bristol Radio Rally at Hartcliffe Youth Centre, Hareclive Avenue, Hartcliffe, Bristol. Open 10am-5pm. Talk-

in and special event station, GB2BRR. Details G1LDJ, tel 0272 667179.

23 November

West Manchester RC Mobile Rally, Pembroke Halls, Walkden, Worsley, Gtr Manchester. Details G1IOO, tel 0204 24104 evenings.

14 December

Leeds & DARS Annual Christmas Rally, Pudsey Civic Centre, Dawson's Corner, Pudsey. Open 11am (10.30am for disabled). Talk-in on S22. Trade enquiries G4WYD, tel 0274 685039, details G1EBS, tel 0274 665355.

## Other Events

All information for inclusion in this column must be sent to the editor, not to RSGB HQ.

5-6 April

RSGB National Amateur Radio Convention, National Exhibition Centre, Birmingham.

5, 6 July

Wembley '86 Amateur Radio & Electronics Hobby Fair, Wembley Conference Centre, London.

20 July

RAIBC Picnic, Broadlands, Romsey, Hants. Talk-in on S22. Details G4COM, tel 0703 693017.

28 September

RSGB HF Convention, Belfry Hotel and Conference Centre, just outside Oxford on the M40.

## OBITUARIES

The Society records with regret the deaths of the following radio amateurs:

H F M Baker, G2LD

Bill Baker died in January aged 81. He first obtained his licence in July 1933. A captain in the Royal Artillery (Territorial Army) at the outbreak of the Second World War, he was on the training staff of the Radar School at Walcher. His major contribution to the war effort was his overall responsibility for the installation of the radar defences in Gibraltar. Of all his very varied interests, amateur radio reigned supreme and his enormous collection of QSL cards is ample testimony to his long and expert involvement with his favourite hobby.

Mr T Beaumont, G6HB

Tom Beaumont died on 27 January. During his service in India in the early 'thirties, he was licensed as VU2FP, and was one of a chain of "empire link stations" which supplied the RSGB with regular news of BERU member societies. As a captain in the Royal Signals during the Second World War, he was a member of the Special Communication Unit. His interest was primarily in cw operating and he had been a member of FOC for many years.

Mr P Charlton, G3IQP

Phil Charlton died in November, a long-time member of the RSGB and active up to the day of his death. In recent years he mainly confined his operation to scheduled contacts with old friends on the hf bands in the UK and the East Coast of the USA.

Mr T Clarke, G4BZW

Tom Clarke died recently, aged 60. Well-known locally on 10pband and a much respected tutor at Shelburne Youth Centre and De Bevoir Adult Centre, he served in the Royal Navy and with the London Fire Brigade until retirement. He had recently been a smiling, helpful assistant at Radio Shack.

Mr B Crawford, GM1FCZ

Mr Crawford died on 25 January. He derived a great deal of enjoyment and pleasure from amateur radio, and through it made a lot of good friends.

Mr E Hewitt, G3GMU

Ernie Hewitt, who died on 8 December, was a keen cw operator on the hf bands. He was also interested in rty and had built much of his equipment himself. He will be sadly missed for

his quiet friendly manner by all who knew him both on and off the air.

Mr J Holden, GM3SF

Jack Holden died on 12 December. He had been an amateur since 1936 and had stations in South Africa and Rhodesia, before coming home in 1965.

Mr G Kelly, G4BPS

Gordon Kelly died on 12 December aged 42. He was a member of the Society from 1973 and an active member of the WAB group. He held the call sign ZB2CM for a number of years and also operated ZB2A as a member of the RAF Gibraltar ARC.

Mr J C Northcott, G8SZK

John Northcott died on 21 October aged 76. A radio enthusiast from the days of Scott Taggart, John passed the RAE on his first attempt, at the age of 70, and enjoyed several years of amateur radio. He was jointly responsible for reopening the now very active Arborfield ARC (G3IHH).

Mr J Paxton, BRS26295

Jack Paxton who died on 24 January aged 67, was a very keen swl. He took and passed the RAE in December 1985.

Mr T Rutherford, GM3BXV

Tom Rutherford died on 23 January aged 74. His first RAF posting during the Second World War was to Pltrevale in Fife, where he became involved in the receiving and transmission of the signals which led to the sinking of the battleship "Bismarck". He also served three years in North Africa maintaining hf high-power ground stations in the company of the "desert rats". He was a past chairman of Moray Firth ARS, a member of Aberdeen ARS, and an active and friendly hf and vhf operator.

Mr K Soulsby, G1CGB

Mr Soulsby died on 18 January. Although he was a member of the RSGB and RAIBC for only a short time, he had made many friends.

Mr J Tickner, G3KGL

Joe Tickner died on 16 January. He was an active member of the RAIBC and a keen cw end ORP operator.

Miss B Tomlinson, G4NSR

Brenda Tomlinson died on 3 February aged 54. A member of the North Cheshire RC, her interest in radio knew no bounds—every new development in radio and general electronics attracted her attention. Raynel received her vigorous loyalty. Being fully qualified in first aid she frequently manned Red Cross posts at radio rallies and other public functions. Other outdoor events have benefited from her operation of portable radio at control points. Her voice will be remembered, particularly on the local 144MHz channel 9 Net.

Mr B R Warson, G4KSI

Bob Warson died on 20 December aged 36. He had been an enthusiastic radio amateur and a member of the RSGB for some years. He was latterly also very interested in microcomputer operation. He was a founder member and treasurer of the Iichen Valley ARC.

Mr J D Wheatley, BRS53921

Mr Wheatley died on 31 January after a long illness. He was secretary/treasurer of the North Cambridge Repeater Group and an active member of RAIBC.

Also:

Mr P J Allen, G4WOM, on 29 January.

Mr J R H Booth, GW6FVE.

Mr R H G Briggs, RS86593, on 27 January.

Mr A G Cross, G4FPL.

Mr T L Davies, G1ICZ, on 22 December.

Mr B Dean, RS40014 on 14 December.

Mr H Doyle, RS88250, on 12 December.

Mr D R Dryden, G3BKQ, on 2 February.

Mr G E R Eddowes OBE, G8IDP, on 27 December.

Mr J A Edwards, RS5749, on 30 December.

Mr A Hawley, G4XTP ex G6XTP, on 9 January.

Mr J M Jeannon, G4XAC, on 7 December.

Mr G McIsaac, RS88241, in December.

Mr M L Morris, RS31550.

Mr D Rapar, G1DNS.

Mr D G Roberts, G3OOR, on 12 December.

Mr F A Rosser, G3YMQ, on 19 December.

Mr W Turton, G6BNF, on 30 October.

Mr B J Wallace, G4HJZ.



## TRIBUTES AND AWARDS

**Geoff Watts, BRS3129, Holder of the Founders Trophy for 1986.**

In 1962 Geoff launched the *DX News Sheet*, a weekly publication for hf operators and swls, and for nearly 20 years compiled, edited, printed and distributed it from his home in Norwich. During that time he sent out nearly a million copies to readers around the world.

In 1964 he launched the Islands on the Air (IOTA) awards programme, a continuing venture believed by many to be the toughest challenge on the hf bands.

Geoff was honoured by USA operators in 1977 when he became the first swl elected to the CQ DX Hall of Fame. He continues to take a keen interest in the hf bands and to publish his world-famous, totally comprehensive list of countries, zones and prefixes.

Both *DX News Sheet* and IOTA are now RSGB services. Contact RSGB HQ for *DXNS* subscription information, and G3KMA for IOTA details.



Geoff Watts at home

**Eric Trehilcock, BERS185, special award.**

Eric has entered the Receiving Section of the BERU/Commonwealth Contest every year since 1934. He has always been highly placed and has won the section on 10 separate occasions. In recognition of this outstanding achievement, the HF Contests Committee suggested to Council that he be given a special plaque to mark his efforts over 50 years.

Council approved the award with great pleasure and it was presented to

him on behalf of the President by the chairman of the HFCC, Ron Glaisher, G6LX, during a recent visit to his home in Melbourne, Australia. Eric has every intention of entering the 1986 event; long may he continue to support RSGB receiving contests.



Eric Trehilcock

**Don McLean, G3NOF, current holder of the Rotah Trophy.**

An RSGB member for 42 years, Don was licensed in 1959 and has now worked 312 countries from the current DXCC list (343 all-time). He monitors the hf bands daily, keeping records of propagation conditions, band openings, and countries heard. Don was a founder member of the Yeovil Amateur Radio Club in 1946 and still plays an active role on the club committee; taking a special interest in newcomers to the hobby.



Don McLean in his shack

## ACROSS THE GENERATIONS OF AMATEUR RADIO


Reg Baker, G6QN, was an army brasspounder in the first world war and obtained his first amateur licence in 1922.

Now 87 and a white stick operator, he prefers the simpler things in life and so has blown the dust off the one-valve transmitter he used to work NY1AB on 7MHz in 1932. The revamped rig (see photo below) boasts a PX25, replacing the original Triotron ZD2, and a mains power supply, but the morse key is pure 1898 vintage. The companion receiver is a second world war Eddystone 358X.



G6QN's distinctive brand of morse may be heard on 7,010kHz and his cheery voice on the Wimbledon & DARS 144MHz net at 9pm on Monday evenings.

Mark Burligh, aged 20 months, son of Dave, G4W1X, is seen in the photograph below resolving a strong ssb signal on 14MHz on his father's TS830S. Dave says: "It's nice to catch 'em young if you can".

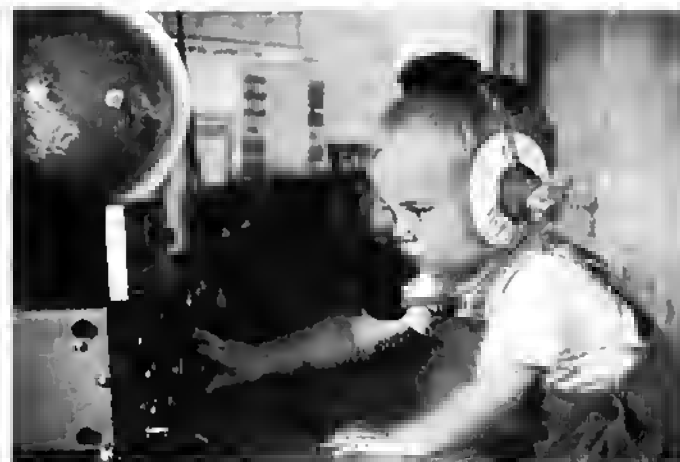



# Members' Mailbag

THE EDITOR  
RADIO COMMUNICATION  
86 BROOMFIELD ROAD,  
CHELMSFORD, ESSEX  
CM1 1SS

The views expressed in published correspondence are not necessarily those of the RSGB, and readers are urged to verify independently any factual statements on which they may wish to rely as it cannot be guaranteed that such statements are correct.

## 50MHz REACTIONS

**Sir**—After the announcement of the 50MHz amateur allocation, I was quite surprised to hear the grumblings of some of my fellow amateurs! It seems that there are those who view the decision of the DTI to allocate the band to Class A licence holders as a decision made by the RSGB! It would also seem, again from listening to the amateur 144MHz band, that all Class A licence holders urged the DTI to exclude Class B licensees from access to the band. It has also been my misfortune and displeasure to hear some amateurs remark that they no longer wish to communicate with any holder of a Class A licence. I am maddened to hear such comments from so called "old hands" as they can only do the Class A/B relationship harm.

I got up off my backside and, because I wanted to use the high frequency part of the radio spectrum, took the time and effort to learn morse. I found it a quite easy and pleasurable exercise to learn, and the whole process, from start to passing the test, took just over two months. My young lady also took the time to learn morse; again, no trouble in gaining a pass. Why, oh why, if you do not like it, do you not do something about it. I would like to make it quite clear that I have nothing against Class B licence holders, only those that feel there is an almost racial or religious difference of some sort between us. I feel sure that those sort of views are unwelcome by both classes of amateur enthusiast and all short wave listeners on our bands.

P J Morris, G4SFI

**Sir**—It was with disappointment, but ultimately no surprise, that I learnt of the decision not to allow Class B amateurs access to the 50MHz band. While appreciating the fact that the DTI was at least prepared to state its case, I find it very difficult to accept some of its reasoning.

The Radio Communication article states "... shall not cause interference ..." and so DTI chose "... not to be influenced ..." In particular by RR 2735 "...". This implies some connection between passing the morse test and not causing interference. Perhaps they could have explained what on earth the connection might be.

While accepting that restricting numbers is likely to reduce the risks of interference, I would suggest that there are equally simple ways of doing this, other than the inevitable Class A/B split. For example, a length of time-licensed qualification, which would probably reduce the risks of interference even further.

Finally, taken in a professional context, considering something in a "positive way" (Mr Maxwell's letter) means "yes". However, the possibility of a European licence (which is news to me and a lot of others) will no doubt provide an argument for continuing to ignore Radio Regulation 2735.

R Czajkowski, BSC, G6ATW

First of all it should be stressed that the Society views the making of a 50MHz allocation to Class A licensees available on a 24h basis as of 1 February as the latest step in the 50MHz experiment; our long-term aim is that the band should be available to all UK amateurs. As a matter of fact the Society suggested various alternative ways in which the DTI could limit the number of amateurs operational on the new band but these were rejected.

**Sir**—Congratulations and a big "Thank You" to the RSGB for all their hard work and perseverance in the allocation on 50MHz. However, why did they apparently "push their luck" in trying to allocate this band to Class B licensees, when the schedule to our licence states that the latter class shall not be permitted to operate on frequencies below 144MHz?

If Class B licensees are to be granted 50MHz, then why not grant them 70MHz also? If they are then given access to 70MHz, why not access to 28MHz, to 24MHz, to 21MHz, to 18MHz, to 14MHz, to 10MHz... etc?

Finally, the morse test could be abolished and we could revert to just one class of licence. Then the RAE could be done away with, and an amateur licence could be issued to anyone who could pay £10 or so over a Post Office counter!

Please, RSGB, if we are going to have standards then try to maintain them, not lower them.

B W N Harris, G3GTF

*Mr Harris seems to be referring to an old licence. As of WARC 1979 the frequency limit below which a morse test would be required was changed from 144 to 30MHz, and it was on that change that the Society has requested that Class B licensees have access to the 50MHz band—on the basis of its being a reasonable expectation—if it is fully released to the amateur service. At present, however, it is available to Class A licensees on an experimental basis. The status of the 70MHz band is unusual, since it is allocated on a secondary basis to the amateur service in the UK; although the Society has attempted to make this band available to Class B licensees, the primary user, the Ministry of Defence, is not prepared to permit this.*

**Sir**—May I congratulate and thank the RSGB officials responsible for the acquisition of yet another new amateur band in the shape of 50MHz. The band plan published in Rad Com January 1986 gives rise to some misgivings, however, and I would like to comment, as follows.

Is it necessary to allocate 80kHz of the 50·000 to 50·100MHz band (cw segment) to beacons? 50MHz will no doubt be a popular cw band, and severe problems are likely to be caused to the reception of beacon signals on an active cw band. Furthermore, the presence of GB3NHO on 50·050MHz precludes the use of this frequency for cw calling, to line up with 144 and 432MHz. While realizing that little can be done about foreign beacons, I would suggest that UK beacons could be resited in the sub-band of 50·080 to 50·100MHz.

My second comment concerns the "all-mode" segment and future Class B occupancy. "All modes" will in practice mean, without a doubt, channelized fm. With a mere 100kHz allocated between 50·400 and 50·500MHz, it is clear that 25kHz channelization is a non-starter. I would like to make a strong plea for 10kHz channelization on this band, since:

- (a) Spectrum usage is economized;
- (b) available commercial equipment, eg FT690R, is based on 10kHz steps; and
- (c) transverting from 29·6MHz fm is made possible.

Even with 10 10kHz channels between 50·400 and 50·500MHz, the eventual influx of Class B licensees will create overcrowding, and 50·310 to 50·490MHz would possibly be needed for fm, leaving 50·100 to 50·300MHz for ssb and other narrowband modes.

Brian Jenkinson, G3JHC

## RSGB SLOW MORSE BROADCASTS

**Sir**—As a B licensee, may I express on behalf of numerous radio amateurs, sincere thanks and gratitude to those who, on behalf of the RSGB, transmit slow morse broadcasts regularly, providing and maintaining their own equipment, and give their wisdom and encouragement to enable B licensees to attain proficiency and take the morse test. In

addition, they have given invaluable assistance to B licensees who possess the Variation Certificate to transmit and receive cw over the air, thus confirming the wisdom of the RSGB in all they are attempting to do in this direction. For this also we thank them.

In the London area, I and others enjoy slow morse broadcasts every evening of the week, and on four mornings during the week for those who are on shift work and unable to listen in the evenings. We are extremely fortunate, and while it may be unwise to single out anyone, may I, on behalf of other B licensees, express our thanks and gratitude to G4ZPD, G4VBL, G4YMK, G4BFJ, G4WVX and G4YFO who run the slow morse broadcasts in the London area.

Finally, please let us have an up-to-date schedule of slow morse broadcasts as soon as possible, for to B licence holders this information is of the utmost value, and in addition it will encourage many B licensees to profit by listening to the slow morse broadcasts and undoubtedly help them to appreciate the great value of cw.

T H Marshall, G1LOH

Your wish is our command—see this month's RSGB News Bulletin.

## DEALER SERVICE

**Sir**—People these days complain at the "drop of a hat", but seem to give little credit when it is due—so I feel you may like to know that Microwave Modules Ltd certainly have given me outstanding service. My MM144/100S, purchased in March 1983, gave off a nasty smell on 15 December, so I sent it to them on 16 December 1st Class post, cost £2.97. I phoned them on the 17th and 18th—not received, and again on the 20th—they had got it, repaired it and sent it back, and I received it on the 21st, with an acknowledgement of receipt post card dated the 18th. So far, no bill received or was enclosed.

Some time ago the same sort of service was given by Thanet, Herne Bay, for the IC251E, but I got a bill from them as it was just out of warranty, which I suppose was fair enough, though unexpected.

Prior to the 144/100S I had a 144/40S (No pre-amp, an old model) which MM repaired two or three times for.

I think this is first-class service by any standard and should be acknowledged as such, unless of course anyone can suggest otherwise. By and large, radio amateurs get a good deal these days from the trade, and they can shop around for the best deal.

Many thanks also to the RSGB.

D K Egan, GW4XKE

## "A DX TRAILER"—GM0BZF

**Sir**—I like the design of this trailer, published in your February issue, but sorry to say it will not comply with the Road Traffic Acts if it is taken on a road. As it has no road springs, the trailer can only travel from one field across a road to another field (a short distance); the rubber mountings will not comply with the Acts. It is required to have stop lights, signal lights and a "T" on the tailgate. Every item on the trailer must be fixed down tight while travelling. I suggest Mr Reid avoids any trouble with the law by checking it with the local police.

R Wallis, RS86700

## THEY ALWAYS HAVE A WORD FOR IT

**Sir**—Now that all electro-magnetic units and many others besides are called after famous scientists, I have been trying to find out about some of the lesser-known men whose names we use. Two pioneers continue to elude me: both are French.

Who was the Monsieur Eddy after whom the "courants d'Eddy" or Eddy current are named? And who was Monsieur Emile Barre from whose name is derived the unit of barometric pressure, the millibar?

Fred Ness, GD3ESV

# THE G4BWE CW MEMORY MK2

STEVE PRICE, G4BWE\*



Steve, who obtained his amateur radio licence in 1973 at the age of 18, does not work in the electronics industry, and has no plans at present to give up his daytime job as a civil servant employed within the DHSS.

Apart from an abiding interest in all aspects of electronics and telecommunications, he also enjoys foreign travel, music, photography, the occasional pint of real ale, and consumes copious amounts of Indian food.

MY ORIGINAL cw memory design (*Rad Com* September 1979, pp 826-7) utilized a single N-channel static ram type 2102, giving a total memory capacity of 1,024 bits (commonly abbreviated to 1k). The memory enabled the cw operator to store short messages, such as CQ calls, which could then be replayed for automatic transmission and repeated indefinitely, as required. A special feature of the Mk1 circuit that is retained in the new design was the use of an asynchronous, free running clock oscillator. This makes it possible to employ any type of key, straight or "bug" in conjunction with the memory, the only proviso being that the clock oscillator is run at a frequency high enough to ensure that approximately four memory locations are used to store each dot. This minimizes distortion of the morse timing, so that the dot, dash and space durations remain subjectively correct.

Since 1979, semiconductor manufacturers have produced static rams offering far greater storage capacity than the 2102, and it is now also possible to obtain cmos memory chips, which feature very low standby power consumption, at reasonable prices. The Mk2 cw memory employs a 16k cmos ram, type HM6116 (obtainable, at the time of writing, for less than £4) which contains no less than 16,384 storage cells, all within a compact, 24 pin dill package! The full 16k available is far more than that required to hold a typical CQ call or routine message. The memory area is therefore segmented into four separate 4k (4,096 bit) blocks, that are selected using a front-panel switch. In consequence, it is possible to retain four entirely different messages, any one of which may be amended or replaced independently of the other three. The standby power consumption of the HM6116LP (the version of the HM6116 that I employ) is only 20µW which, assuming a supply rail of 5V, equates to a maximum current drain of just 4µA.


Advantage has been taken of this remarkable specification by incorporating a rechargeable battery to provide standby power. The memory may therefore be disconnected from its psu for long periods (at least a few weeks) without corruption or loss of data occurring.

## Design background

In the manufacture of semiconductor devices it is the volume of production that primarily determines retail price. It's hardly surprising, therefore, that the cheapest static ram chips are those fabricated in very large quantities to act as support devices in microprocessor systems—the ubiquitous home-computer being an obvious example of a micro-based product where unit cost is a critical factor. Microprocessors handle data in the form of bytes. Bytes are digital "words", consisting of either eight or 16 binary digits (bits). This explains why a microprocessor chip will normally be provided with at least eight separate data pins, thereby enabling all the bits that constitute an individual byte to be simultaneously presented to, or extracted from, the micro. The necessity to deal with bytes, which are shifted around microprocessor systems on parallel data buses comprising eight or 16 lines, has led, inevitably, to the development of rams that are also provided with multiple data pins and can therefore store whole bytes, or at least large segments of bytes, within a particular memory location.

The HM6116 is specifically designed to store eight-bit bytes, and to facilitate this it has eight separate I/O pins (see Fig 1).

I/O signifies "data in/out" and indicates that each I/O pin functions as an input during the write cycle (when data is fed into the memory) and as an output during the read cycle (when previously stored data is fetched from the memory). The HM6116 also has 11 address pins (labelled A0 to A10) that enable any one of 2,048 memory locations to be accessed using the appropriate binary number. For instance, if address pins A3, A6 and A9

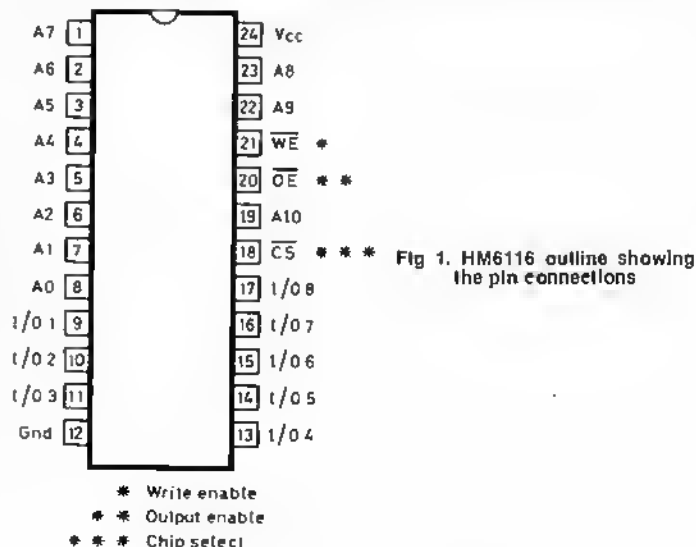

\*458 Soundwell Road, Kingswood, Bristol BS15 1JU.

are connected to +5V (logic 1) and the other address pins are grounded (logic 0) the binary address code 01001001000, or 584 in decimal is produced. Within this 584th location it is possible to store a single eight-bit byte—perhaps 01101001 (105 in decimal). The 16k capacity of the HM6116 is therefore said to be organized as  $2k \times 8$  bits.

Unfortunately, morse code does not consist of eight-bit bytes! It is merely a simple, serial code containing successive marks and spaces that are variable in length. Within a digital system the marks (key-down periods) may be converted to logic-level 1 (usually +5V), whereas the spaces (key-up periods) are defined as logic 0 (0V).

At first sight there appears to be little difficulty in utilizing the full capacity of the HM6116 to store morse. The obvious solution, one might think, would be to store a separate message via each I/O pin, thus providing a useful 2k capacity in each message "compartment", and the facility to hold concurrently in memory up to eight different messages. The folly of this proposal is illustrated with the help of Fig 2. The address pins of a fictitious  $1k \times 2$ -bit ram are coupled to the outputs of a multiple stage binary counter, which in turn is driven by a free-running clock oscillator, so that all memory locations are sequentially addressed in strict order, starting from zero and finishing at 1,024. Closing S2 will ground the memories  $\overline{WE}$  (write enable) pin and also couple the input line to the pole of S1.

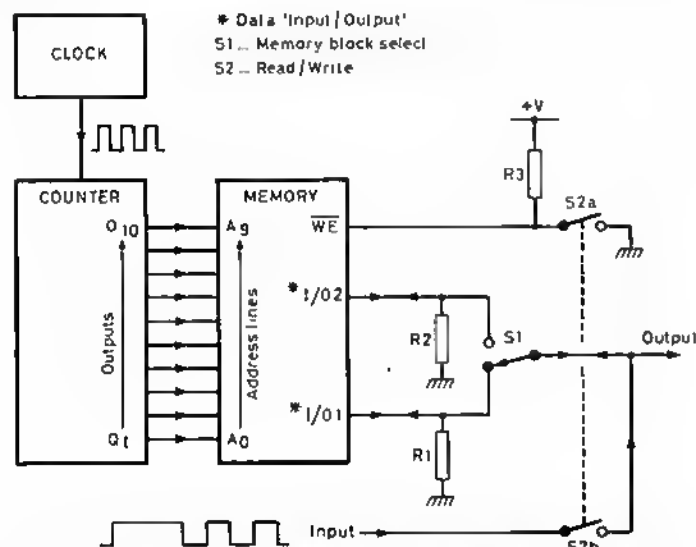


Fig 2. This scheme for a two-message cw memory is doomed to failure!

We can now load the memory with morse by selecting I/O1 using S1 and then running the address counter (for the sake of simplicity the counter start and reset circuitry has been omitted from Fig 2). Once a message has been written into I/O1 it will be possible to replay the stored morse by opening S2, which puts the memory into read mode, and then re-running the address counter. So far so good!

Imagine that we now wish to load another message into the memory. The process described above is merely repeated, but this time S1 is set to select the second data pin, I/O2. Storing and then retrieving the morse loaded into I/O2 will pose no difficulty, but a disaster occurs when we attempt to once again replay the first message loaded via I/O1. The result is a stupefying silence. This is because I/O1 was grounded by the "tie-down" resistor, R1, while we recorded the second message into I/O2. In consequence, logic 0 will have been written into every memory cell coupled to I/O1, thus completely obliterating the first message. It must be emphasized that disconnecting R1, and thereby allowing I/O1 to "float", will not improve matters, as any potential appearing on an I/O pin during the write cycle will corrupt previously stored data.

Clearly, if we are to harness the full capacity of a ram featuring multiple I/O pins it will be necessary to convert the morse into parallel data, ie bytes, and by doing so utilize all of the I/O pins simultaneously. Fig 3 illustrates how this may be achieved. Incoming morse is clocked through a serial to parallel converter so that the logic levels present during eight segments of a short time-frame are latched, in correct order, onto eight separate data lines. On completion of the eight-bit serial-to-parallel conversion the memory address counter is incremented by one count. Assuming that the  $\overline{WE}$  pin is held low, this results in the data presented to I/O pins 1 to 8 being written into the appropriate memory location. The process is now repeated in order to convert the next eight samples into a further byte, and so on.

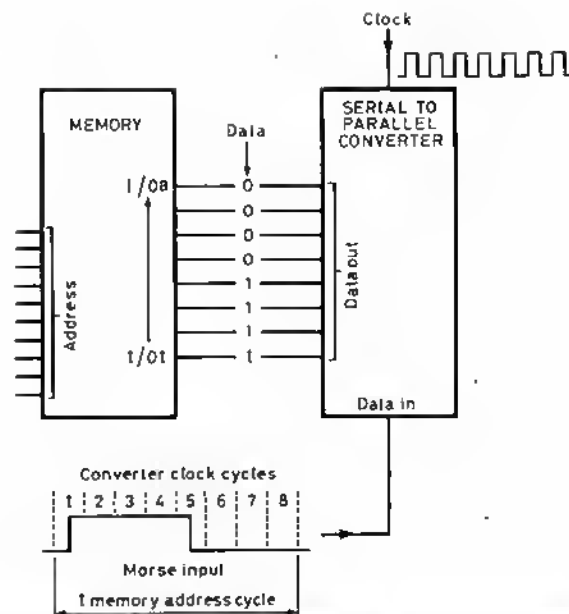


Fig 3. The serial to parallel converter enables storage of morse within a multiple I/O ram

During the memory read operation, there will be a requirement for parallel-to-serial conversion so that the morse may be returned to its original form for correct playback. The functions of serial-to-parallel and, conversely, parallel-to-serial conversion may both be implemented using a single LSI chip known as a uart (universal asynchronous receiver transmitter). Most home-computers contain a uart, which forms part of the cassette interface that enables bytes of data to be stored, in serial form, on one track of ordinary magnetic sound tape. Unfortunately, the commonly-available uarts are rather cumbersome 40-pin beasts, featuring a wide range of facilities that are simply not required in the present application. Therefore, a cheaper, but nonetheless straightforward alternative was developed.

Fig 4 shows, in skeleton form, the solution adopted. The CD4051 is described, in the National Semiconductor cmos databook [1] as a "single eight-channel analogue multiplexer/demultiplexer". In essence, the CD4051 consists of a single-pole eight-way switch, its pole position being determined by a binary code presented to three control pins (labelled A, B and C). The eight internal switches are logic-controlled signal gates which have an important advantage when compared to standard CD4000 logic gates in that they are bi-directional. Although fully capable of passing analogue signals, these gates are quite at home when used to transfer logic levels. The eight input/output pins are connected directly to the memory I/O pins, as shown. The first three outputs of the address counter (Q1-Q3) are employed to drive the CD4051 control pins. When writing morse into the memory the switch-pole is momentarily connected to each of the input/output pins in turn. Between each data line and ground is a small tantalum capacitor. An individual capacitor will be either charged to logic level 1, or

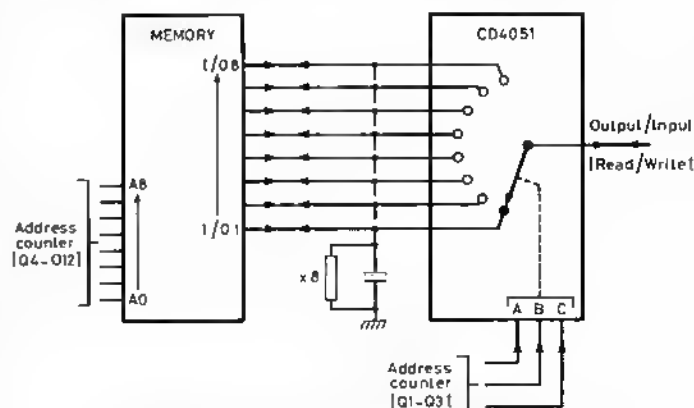


Fig 4. An efficient and low-cost serial-to-parallel/parallel-to-serial converter based around a single CD4051 device

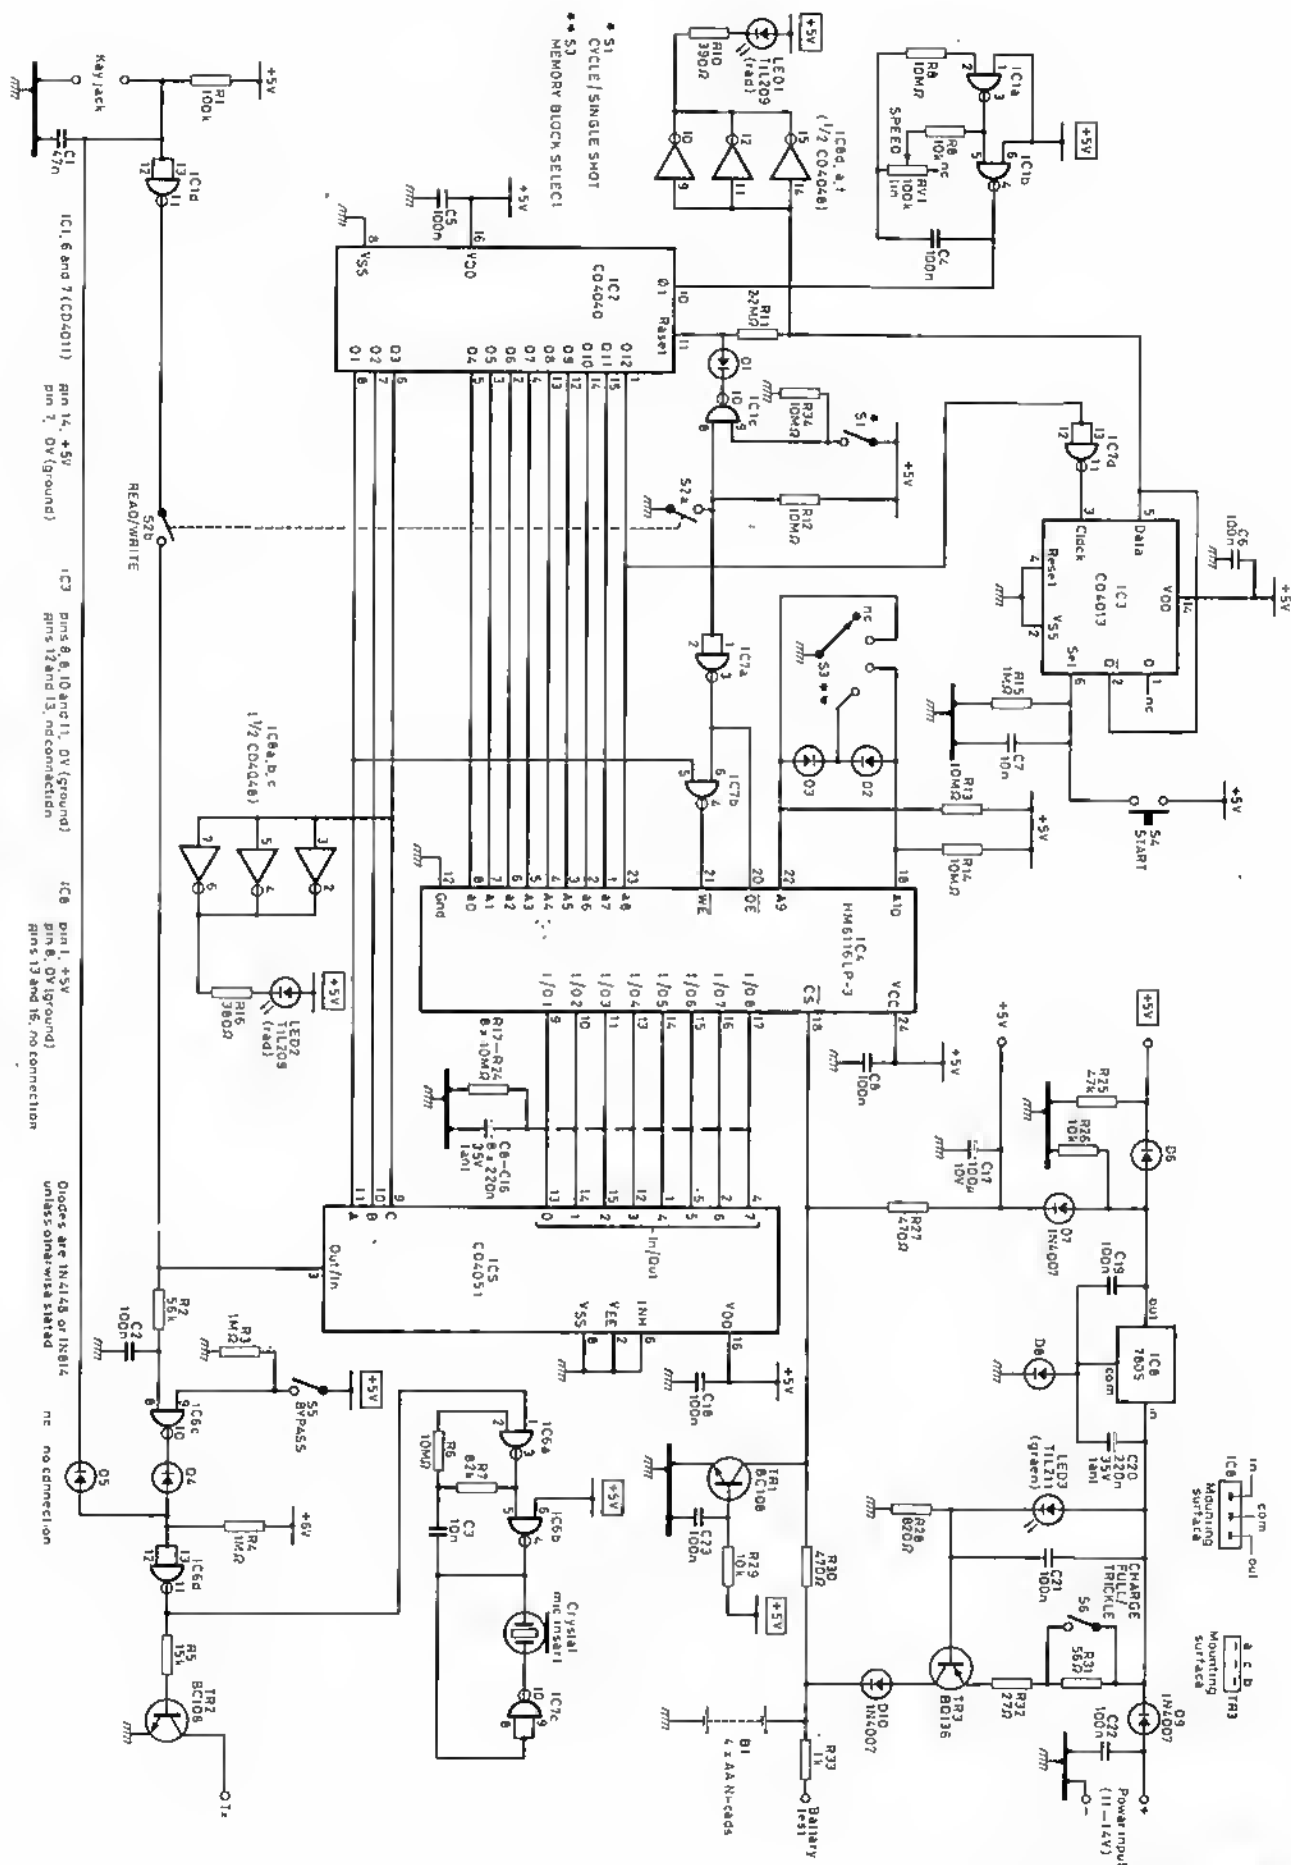


Fig 5. The full circuit diagram of the CW memory

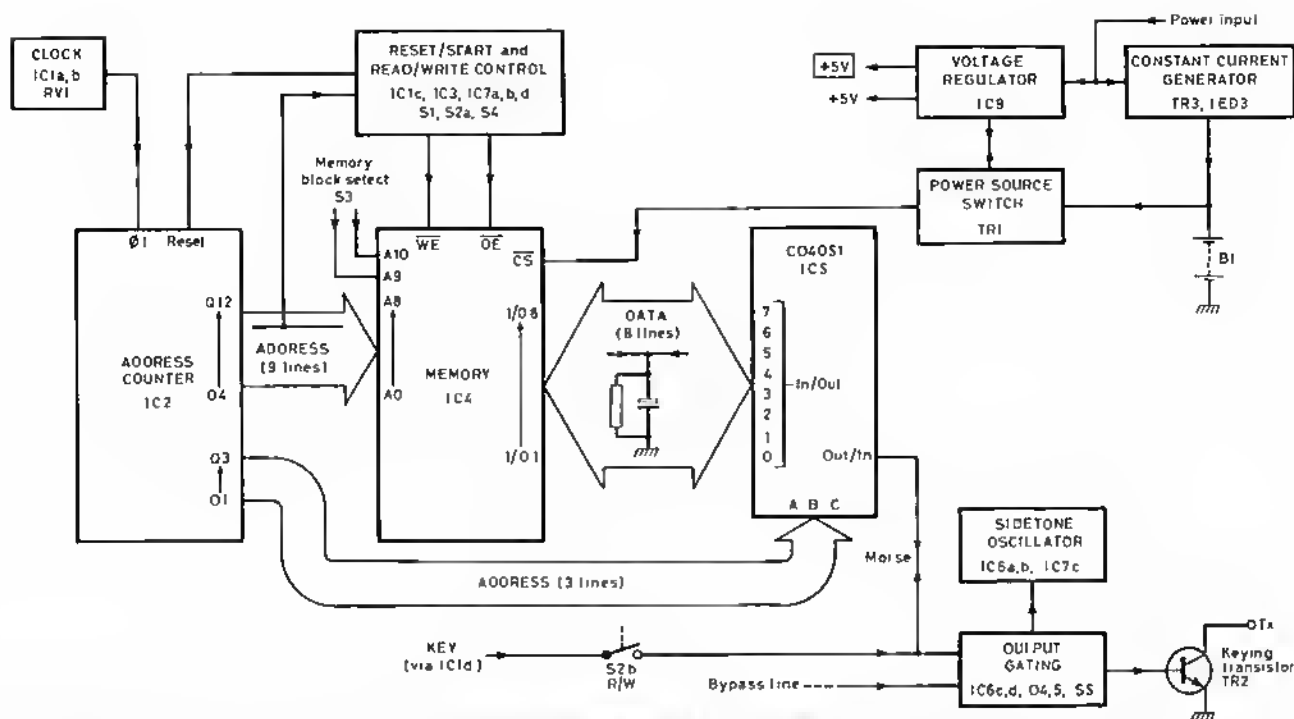


Fig 6. Block diagram of the CW memory

discharged (logic 0), depending on whether the key is down or up when the relevant data line is coupled to the switch-pole. The capacitors serve as rudimentary data latches, ensuring that the logic levels present during each segment of the time frame are memorized. After eight address counts, the Q4 output of the address counter will change state and the "latched" data will be written into the appropriate memory location as a single eight-bit byte. The capacitors have a value of 220nF, and the tie-down resistor connected in parallel with each tantalum is 10MΩ. The resultant time constant of 2.2s provides a more than adequate memory period.

Because the CD4051 contains bi-directional switches, the circuit of Fig 4 works automatically as a parallel-to-serial converter while the memory contents are being read. The capacitors perform no useful function during the read operation, but as their presence is not harmful they can be left permanently in circuit.

### The full circuit

Fig 5 shows the complete circuit diagram of the Mk2 CW memory, while Fig 6 illustrates the system in block form. Firstly, it will be noticed that there are two separate +5V rails. The rail labelled with a surrounding box is only present while the memory is actually in operation, and becomes, in effect, a ground connection during standby periods (more about this later).

IC1a and b form a clock oscillator with frequency determining components C4, R9 and RV1. The clock rate is variable over an 11:1 range, controlled from the front panel by RV1.

The clock drives IC2, a 12-stage ripple carry binary counter. Outputs Q1 to Q3 feed the control pins of the CD4051 (IC5), as discussed previously. The remaining counter outputs (Q4 to Q12) provide address for the ram, IC4. Under control of S3, the network comprising R13, R14, D2 and D3 generates the four possible binary codes (00, 01, 10, 11) to be presented to the final two ram address pins A9 and A10. IC2 outputs Q4 to Q12 feed the address pins A0 to A8 and thereby generate an address sequence of 512 counts. As each memory location stores a byte consisting of eight bits, the resultant capacity is:

$$512 \times 8 = 4,096 \text{ bits (4k)}$$

We already know that the HM6116 has a total capacity of 16,384 bits (16k). The function of S3 is to define which one of the four possible 4k blocks a particular message will occupy—hence the term "memory block select".

IC3 and IC7d are employed to reset IC2 at the end of the address count. The counter will then be held in the reset state until the sequence is re-initiated by momentary depression of S4 ("start"). S1 ("cycle/single shot") allows the counter reset circuitry to be disabled so that the address system runs continuously (cycle mode). This facility makes it possible to repeat CQ calls indefinitely, ie without having to press S4 at the end of each call. The connection between pin 8 of IC1c and the junction of S2a, R12

ensures that irrespective of S1's setting, the memory cannot possibly operate in cycle mode during the write operation, ie when messages are being recorded. The reset state is indicated by illumination of LED1 (although this does not apply in cycle mode) and also by the fact that LED2 (clock rate indicator) stops flashing. Provided the clock frequency is set high enough to ensure that LED2 flashes at approximately dot rate (this, of course, is a variable and depends on the sending speed chosen), accurate recording of the morse is ensured.

Closing S2 puts the ram into write mode via IC7a and b. The gating provided by IC7b, which has one input (pin 5) connected to the Q1 output of IC2, ensures that the WE pin of IC4 is held high during all address transitions. This satisfies an important requirement for correct operation of the HM6116.

IC1d is a keying inverter which produces a logic 1 output at pin 11 on key-down. S2b will be closed during write periods; thus allowing morse to be input to pin 3 of IC5 (pin 3 is the CD4051 switch-pole explained earlier). IC6c, d, D4 and D5 provide output gating to drive the keying transistor, TR2. Morse being read out of the ram is converted into serial form by IC5 and appears at pin 3. C2 and R2 form an integrator with a time constant of 5.6ms. This network serves to suppress any short glitches generated by the discharging of capacitors C9 to C16. Opening S5 (bypass) inhibits IC6c, thus preventing the memory contents from reaching the output. While S5 is open, "real-time" sending can be accomplished via the bypass line formed by the connection between the input of IC1d and D5.

IC6a and b comprise the sidetone oscillator which drives a crystal microphone insert or similar high-impedance transducer. A bridge output configuration is realized using IC7c as an inverter. This arrangement increases the sidetone volume by doubling the voltage swing across the insert. Increasing the value of R7 will lower the sidetone pitch, and vice-versa.

The power supply section incorporates one +5V regulator (IC9), a constant current generator (TR3) and a switching stage (TR1). IC9 provides two +5V outputs. The rail developed via D6, which is labelled with a surrounding box for identification, depends entirely on IC9 for its existence, and so, whenever the external power source is disconnected or simply switched off, the potential at the junction of D6 and R25 drops to 0V. The second, and main, +5V rail is routed to decoupling capacitor C17 via D7. IC9, however, is only responsible for generating this supply rail when the external power source is active. TR1 will be switched hard on while the external supply is present, so causing the junction of R27 and R30 to be held at a potential very close to 0V. This has the effect of isolating the standby battery (B1) from the main supply rail so that the memory functions entirely from the output of IC9.

TR3 works in conjunction with LED3 as a constant-current generator to provide a charging facility for B1. Closing S6 increases TR3's collector current to approximately 45mA, whereas with S6 open the current

generated is 15mA. As R30 diverts around 10mA of the current sourced by TR3, the net charging rate supplied to B1 is either 35mA (full-charge) or 5mA (trickle-charge), depending on the setting of S6. B1 is formed by a series connection of four readily-available AA size nicads, which, when fully charged, provide a potential of almost exactly 5V.

If the external supply is absent, TR1 will be switched off and the standby battery supplies a very small quiescent current to the main supply rail via the series combination of R27 and R30. Note that the HM6116 chip select pin is also controlled by TR1.

It is the forward voltage drop of approximately 1.9V appearing across LED3 which provides a reference for the constant-current generator. Nevertheless, LED3 may be mounted on the front panel so that it will also provide an indication of the power supply status.

## Operation

The cw memory provides the facilities already outlined by functioning in two distinct modes:

### (1) Standby

Switching off, or disconnecting, the external dc supply, automatically forces the internal circuitry into a state of rest. Because the +5V rail developed via D6 is no longer present, pins 1 and 6 of IC1 are held at 0V and so the clock is prevented from oscillating. The sidetone oscillator is similarly inhibited by virtue of the connection to pin 6 of IC6b. There will be no supply available for LED1 and 2 because the anodes of these devices are at 0V also.

The circuitry is far from dead, however, as TR1 will be switched off, thereby allowing B1 to supply the main +5V rail via R27 and R30. The ram chip select pin is held at +5V, and so the current consumption of IC4 drops to no more than a few microamps. It is obviously a prerequisite for data retention that IC4 remains powered-up. Less obvious is the need to supply the other ICs. However, because various pins of IC4 (eg the address pins) are connected directly to other devices, it is desirable to maintain defined logic levels throughout the system. The alternative would be to isolate every ic except IC4 from the supply rail and rely on high value tie-down resistors connected between most pins of IC4 and 0V (ground). Clearly, this approach would add to the complexity of the design, and such action is quite unnecessary when one considers the extremely low quiescent current consumption of the CD4000 support devices. Furthermore, retaining a supply to IC2 (the address counter) ensures that momentary interruption of the external supply will not cause erratic jumps in the address count.

The high value of 10MΩ specified for R12, 13, 14 and 34 guarantees that the standby current drain will remain acceptably low, irrespective of the settings of switches S1, 2 and 3 (although it is a good idea to leave S2 in the read position). While the memory is in standby mode it will not be possible to either record or playback morse, and almost the sole function of B1 is to facilitate static data retention. Nevertheless, because IC1 and IC6 remain operational, TR2 continues to function and so keying of the transmitter via the memory key jack is still possible. One should be aware, however, that during key-down the drain through R1 and, more importantly, the base current of TR2, causes the standby consumption to rise by a few hundred microamps. This, in turn, produces a potential difference of about 400mV across the series combination R27, R30. As a result, the main supply rail may drop to something near 4.5V. Such a reduction will not, under normal circumstances, affect the ability of IC4 to preserve data, but it is obviously prudent to keep B1 in a healthy state of charge.

### (2) Read/write

Firstly, energizing the memory from an external dc supply of between 11 and 14V allows the constant-current generator to recharge B1 via D10. Assuming that the nicads are initially discharged, it will be necessary to charge them for about 16h at 35mA (ie with S6 closed) before putting the memory into service. Thereafter, B1 will automatically receive a top-up charge each time the memory is used. If it is feared that the battery may be overcharged due to prolonged operation of the memory during contests, or very frequent use, S6 may be opened, thereby reducing the charge current to a mere 5mA. R33 is connected to a test socket and provides a facility to check the battery voltage using a multimeter switched to its 10V dc range. Providing that the meter has a sensitivity of at least 10kΩ/V, the drop across R33, which is incorporated to protect against short circuits, will be insignificant.

With an external supply present, the clock oscillator will run continuously. In order to record morse, the memory must initially be put into the reset state. This condition is indicated by illumination of LED1 and the absence of any flickering from LED2. Resetting the memory merely involves letting the address counter run, with S1 open (single-shot) until it is automatically reset by the action of IC3 and IC7d. The memory block to be employed for storing the message is now selected using S3, and RV1 is adjusted to suit the sending speed and message length. Up until this point,

## Components list

|   |                                  |
|---|----------------------------------|
| R1  | 100kΩ                            |
| R2  | 56kΩ                             |
| R3, 4, 15   | 1MΩ                              |
| R5  | 15kΩ                             |
| R6, 8, 12, 13, 14, 17, 18, 19, 20, 21, 22, 23, 24, 34             | 10MΩ                             |
| R7  | 82kΩ                             |
| R9, 26, 29  | 10kΩ                             |
| R10, 16   | 390Ω                             |
| R11   | 2.2MΩ                            |
| R25   | 47kΩ                             |
| R27, 30   | 470Ω                             |
| R28   | 820Ω                             |
| R31   | 56Ω                              |
| R32   | 27Ω                              |
| R33   | 1kΩ                              |
| All resistors are 0.33W, 5% tolerance, carbon or metal film types |                                  |
| RV1   | 100kΩ linear                     |
| C1  | 47nF ceramic                     |
| C2, 4, 5, 6, 8, 18, 19, 21, 22, 23                                | 100nF ceramic                    |
| C3, 7   | 10nF ceramic                     |
| C9, 10, 11, 12, 13, 14, 15, 16, 20                                | 220nF tantalum electrolytic 35V  |
| C17   | 100μF electrolytic 10V           |
| IC1, 6, 7   | CD4011                           |
| IC2   | CD4040                           |
| IC3   | CD4013                           |
| IC4   | HM6116LP or HM6116P (see text)   |
| IC5   | CD4051                           |
| IC8   | CD4049                           |
| IC9   | 7805                             |
| TR1, 2  | BC108                            |
| TR3   | BD136                            |
| D1, 2, 3, 4, 5, 6, 6  | 1N4148 or 1N914                  |
| D7, 9, 10   | 1N4007                           |
| LED1, 2   | TIL209 (red)                     |
| LED3  | TIL211 (green)                   |
| S1, 5, 6  | Toggle spst                      |
| S2  | Toggle dpsi                      |
| S3  | SP four-way rotary               |
| S4  | SP push to make (momentary)      |
| B1  | 4 x AA size nickel cadmium cells |

### Miscellaneous

Crystal microphone insert (see text). Sockets for key, power and battery test, dill sockets (4 x 14 pin, 3 x 16 pin, 1 x 24 pin). Control knobs (for RV1 and S3). Four cell holder for nicads (if required). Veroboard. Cable. Mounting/fixing sundries. Case (see text).

### Suppliers

Capacitors, resistors and switches obtainable from: Electrovalue Ltd, 28 St Jude's Road, Englefield Green, Egham, Surrey TW20 0HB. Semiconductors obtainable from: Technomatic Ltd, 17 Burnley Road, London NW10 1ED.

S2 should normally be left in the "safe", open position (read) in order to avoid inadvertently wiping previously-stored messages that the operator may wish to retain. The penultimate action, therefore, is to close S2 (write), which prepares the memory for recording. Finally, and just prior to the commencement of sending, S4 (start) is momentarily depressed in order to release the address counter from the reset state. LED1 is immediately extinguished and LED2 will start to flicker, indicating that the address sequence has begun.

The playback of messages is simplicity itself and merely involves the appropriate setting of S3 (ie to select the required message), with S2 open (read). If the memory is in the reset state—S1 having been opened (single shot)—it will also be necessary to depress S4 (start). Continuous repetition of CQ calls is possible with S1 closed (cycle), but otherwise S4 can be employed to initiate a single repeat of any message following the automatic reset which occurs when S1 is open.

Opening S5 will effectively bypass the memory so that the transmitter can be keyed live from a key plugged into the memory key jack. It is also possible to mix live and recorded morse by leaving S5 closed. A possible technique, which I admit will probably require a measure of practice on the operator's part, involves preparing recordings of standard messages with gaps left to facilitate the live insertion of appropriate variables (eg the time of day, other operator's name etc).

Setting RV1 at minimum resistance produces the highest clock rate and the memory will cycle in approximately 12s. Rotating RV1 to the other extreme should lengthen the cycle time to around 130s. Although it is quite practicable to record messages of 2min duration using the slowest clock rate, the sending speed should be restricted to no more than about 12wpm, thus avoiding noticeable timing errors on replay.

As with other cw memory systems, the replay speed may be adjusted at will—allowing, for instance, a message recorded at 15wpm to be



transmitted at 25 or even 40wpm, if desired. The contents of a particular memory block may be changed by simply recording a new message over the top of the previous one.

## Construction

My prototype is housed in a screened case of commercial manufacture fabricated from aluminium and steel. Quite obviously, if the memory is to be operated in close proximity to a high-power transceiver, the choice of a metal enclosure is mandatory, as strong rf fields must be prevented from inducing stray currents into the circuitry. The various decoupling capacitors (mainly 100nF ceramic types) contribute to the units rf immunity, but it is impossible to guarantee that these measures will prove entirely adequate in all situations. Individual constructors may therefore find it necessary to incorporate additional decoupling and/or filtering elements in order to cure specific problems. If, for instance, it is suspected that the power cable which couples the memory to its external psu is acting as an antenna and thereby providing a path for rf energy to enter the memory, there are a number of remedies that can be tried: First, the use of screened, rather than flat twin-cable, may prove effective. Also, ferrite beads can be threaded onto the internal flying leads which connect to the memory power socket. Alternatively, it is possible to fabricate rf chokes by winding a few turns of thin wire around small ferrite toroids. The cable used for the keying lines should definitely be of a screened, coaxial type, and good ground continuity must be maintained between the memory, psu and transceiver. This requirement extends, of course, to the memories casing, which must also be connected to ground (0V).

Apart from items which are affixed to either the front or rear panel (ie sockets, switches, leds and the potentiometer RV1) all components excepting B1 and the sidetone sounder may be mounted on Veroboard. It is strongly recommended that sockets are provided for the dillies as this can assist greatly in fault-tracing and analysis. IC9 and TR3 should be bolted to small heatsinks, as these components dissipate significant power. The AA size nicads which comprise B1 may be housed in a standard four-cell holder. Alternatively, cells having solder-tag connections could be used. If the microphone insert employed as sidetone sounder has a metal outer casing, this must be insulated from ground.

Individual component types and ratings are detailed in the components list, and there should be no difficulty in obtaining any of the parts specified. There are two main versions of the HM6116 cmos ram available, suffixed "P" and "LP" respectively. The HM6116LP is recommended because this device features the lowest standby dissipation (20µW, corresponding to a current drain of only 4µA). An HM6116P may, however, be employed providing that the constructor is willing to tolerate a higher standby dissipation of around 100µW. The ram I purchased has the figure three appended to the type number (ie it is marked HM6116LP-3) and this indicates a maximum access time of 150ns. As even the slowest version of the HM6116 (type-4) boasts a 200ns access time, this parameter may be ignored completely, even by members of FOC, when obtaining a ram for the cw memory!

## Refinements and modifications

As explained earlier, it is necessary to allow the address counter (IC2) to cycle until reset is indicated by illumination of LED1 before morse can be recorded. If the clock rate is set at maximum this process will take no longer than 12s. However, should such a delay be considered unacceptable, it is possible to modify the clock oscillator by inclusion of a push-to-break switch and a 1nF capacitor (see Fig 7). Momentary depression of the switch takes C4 out of circuit, and the clock frequency is increased by a factor of 100. Even with RV1 set for the slowest clock rate, reset will occur in less than 2s.

Although a crystal microphone insert will suffice as the sidetone sounder, these transducers do not produce a particularly pleasant tone, and due to the increasing use of electret microphone capsules they are becoming somewhat rare. An alternative is to employ a miniature moving-coil

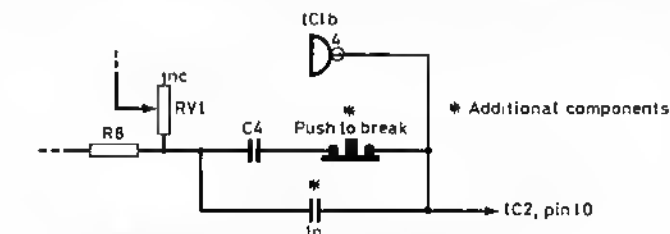


Fig 7. A modification allowing the clock oscillator frequency to be increased momentarily by a factor of 100

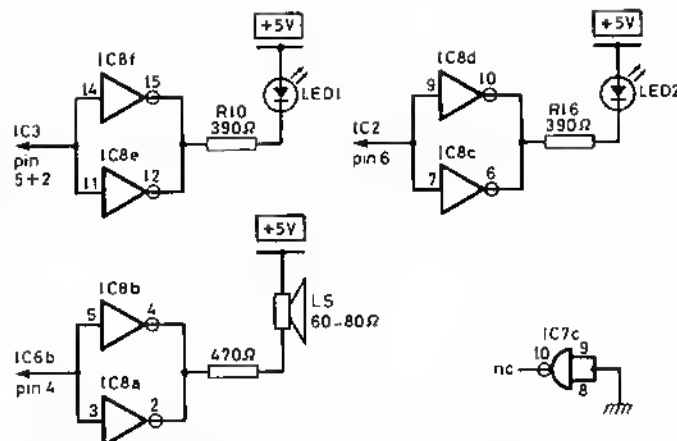


Fig 8. A miniature moving coil loudspeaker may be employed as sidetone sounder using this modification

loudspeaker of the type found in pocket radios. Unfortunately, it is not possible to drive a loudspeaker directly from the sidetone oscillator and so a simple buffer stage must be provided. Fig 8 shows a suitable modification, based around IC8. The number of paralleled gates used to drive LED1 and LED2 is reduced from three per l.e.d (shown in Fig 6) to two, thus leaving two of the six gates contained within IC8 available for use as the loudspeaker buffer. Constructors should note the inclusion of a current-limiting resistor (470Ω) in series with the loudspeaker, which draws its voice-coil current from the "boxed" +5V supply—thus ensuring that the loudspeaker cannot consume power during standby periods. IC7c will no longer be required and its inputs must be tied down, as shown. A loudspeaker of lower than 60Ω impedance may be employed, but the sidetone volume will be reduced.

Although using the memory in conjunction with an external mains power supply unit producing around 13.8V dc output (an item which forms an integral part of most present-day amateur stations) represents a practical and cost-effective approach, there is nothing to prevent a mains power supply being built into the memory itself. The additional circuitry required is shown in Fig 9. The reverse polarity protection diode (D9 in Fig 6) may be omitted from mains powered versions of the memory.

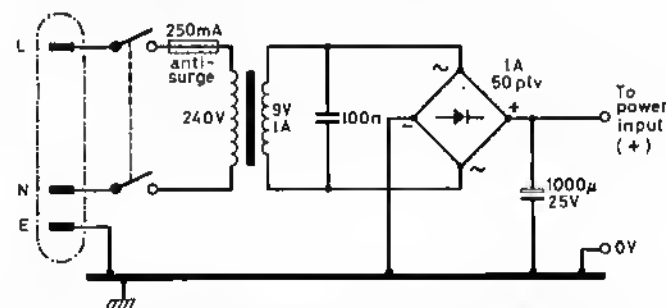


Fig 9. The additional circuitry required for mains operation

TR2 will key the majority of current transceivers direct, ie without the need for a relay. However, there is nothing to prevent TR2 being used to drive a miniature reed relay, if desired. One end of the relay coil should be connected to the collector of TR2, and the other end to either the boxed +5V supply (cathode of D6) or, if the relay has a higher voltage coil, to the positive power supply input. The usual back emf protection diode must be wired across the relay coil (ie diode anode to TR2 collector) but constructors should note that some encapsulated relays (eg the RS dill reeds) have an internal diode already provided. It will not be possible to key the transmitter while the memory is in standby mode if a relay is incorporated. Other alternatives include the use of a vmos device for TR2 or, where it is thought necessary, a transistor of higher voltage rating than the BC108. The constructor will no doubt be aware of the keying requirements for his or her rig, but it is always advisable to check the specification of any other, less familiar, transceiver before connecting the memory.

## References

[1] CMOS Databook, published by the National Semiconductor Corporation.

# A LINEAR AMPLIFIER UNIT FOR THE HF BAND TRANSCEIVER

Lorin Knight,  
MIEE, G2DXK\*

(Part 2)

## Printed-circuit boards

All of these are made from single-sided copper-clad glass-fibre board. Recommendations for making boards were given in the original transceiver article (*Rad Com* August 1984).

Fig 20 shows the etching pattern for the transmitter drive module PCB1, and Fig 21 shows how the components are mounted. After winding T101 it is advisable to check that the insulation on the wire has not been damaged, ie that the resistance between each winding and the other, and of each to the ferrite bead, is not less than 10M $\Omega$ . After having confirmed that this is so, it is advisable to run a few drops of polystyrene cement into the bead to prevent the wires moving about. C108 is soldered to the tags on the trimmer capacitor C107, and the leads then taken through and soldered to the underside of the pcb.

The coils L1 to L8 are wound as indicated in Table 1, and the windings are held in place with polystyrene cement. A 0.218in drill is used for the mounting holes, but these need to have small indentations filed into them before the coils can be fitted. Araldite is used to cement the coils to the board.

Fig 22 gives the etching pattern for the lit pcb PCB2, and Fig 23 gives the assembly details. The transistor TR201 is mounted with its wires coming up through the board from the coppered side, the transistor being positioned so that it matches up with the fixing hole in the chassis. The two capacitors C203 and C204 are mounted one above the other.

Figs 24 and 25 give details of the 12V supply module PCB3. The voltage regulator IC301 has its wires coming upwards through the fixing holes and it will be bolted to the chassis.

Figs 26 and 27 give details of the meter-shunt module PCB4. The position of the two mounting holes may have to be changed to suit the particular meter being used.

Figs 28 and 29 give details of the fuse panel PCB5. This board is mounted on two brackets as shown in Fig 30.

Figs 31 and 32 give details of the receiver preamplifier board PCB6. T601 and T602 are wound as indicated in Fig 4, and, after an ohmmeter check to confirm that there has been no insulation damage, should receive a few drops of polystyrene cement.

Fig 33 gives details of the little board PCB7, which holds the heater dropper resistor.

4.3 x 1.3in

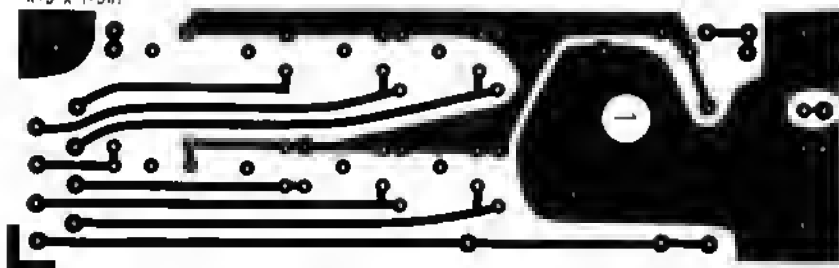


Fig 20. Etching pattern for transmitter drive module PCB1

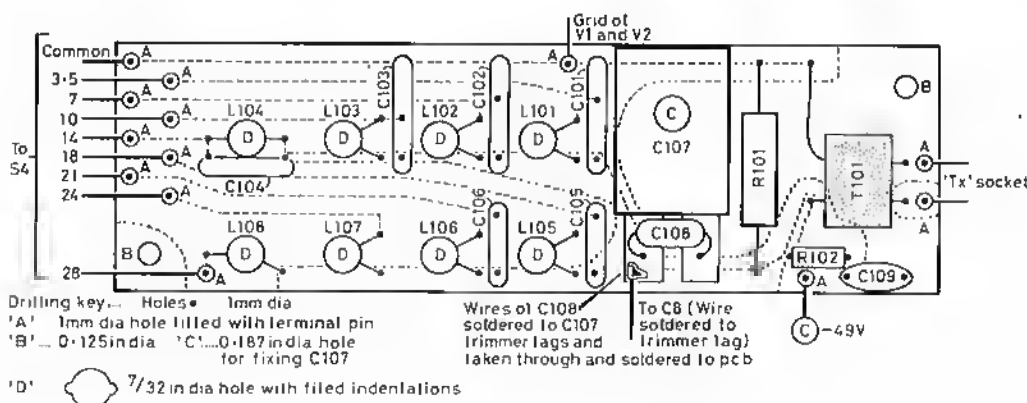


Fig 21. Drilling and assembly of PCB1

\*123 Baldock Road, Letchworth,  
Herts SG6 2EQ.

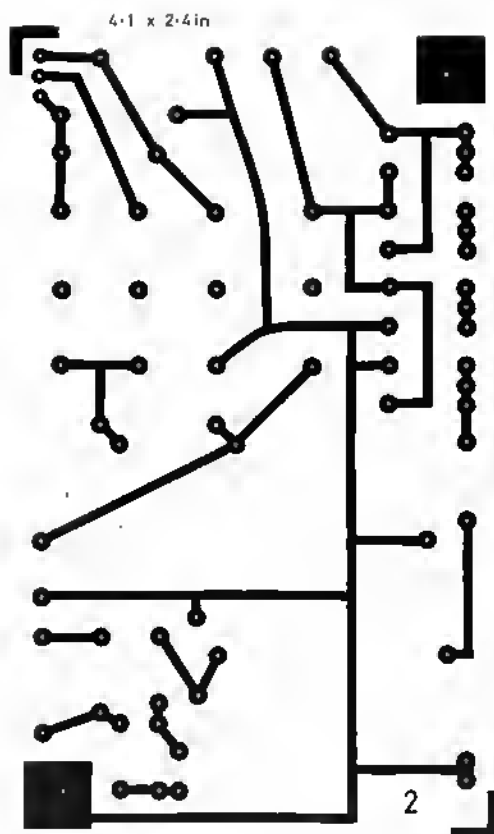


Fig 22. Etching pattern for hi module PCB2

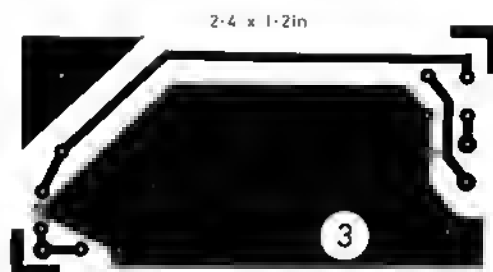


Fig 24. Etching pattern for 12V supply module PCB3




Fig 26. Etching pattern for meter shunt module PCB4

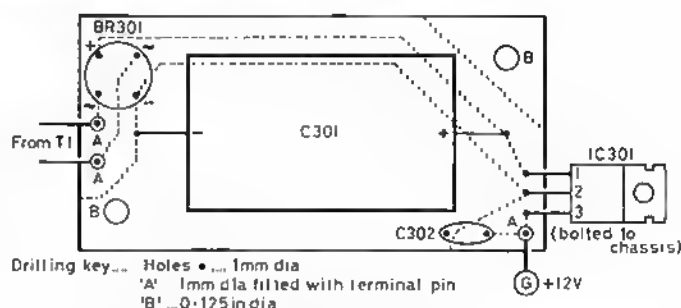


Fig 25. Drilling and assembly of PCB3

### Wiring and commissioning the power supplies

It is recommended that the wiring and commissioning starts with the power supplies. Thus PCB2, PCB3, PCB5 and PCB7 should be fitted and all the power supply wiring done, including that to LED2. At this stage, however, nothing should be connected to the outputs, except that the 12.6V supply can be wired up to the valve holders. The heater decoupling capacitors C3 and C6 should be soldered directly from the valveholder pins to adjacent earth tags.

Note that TR201 on PCB2 needs to be clamped to the chassis using a set of insulating washers. No such washers are required for bolting IC301 (on PCB3) to the chassis.

In my prototype the 12V supply to the transceiver unit is taken via an insulated screened lead, which leaves the linear amplifier unit through the grommet at the back and then plugged into the power socket on the transceiver unit. It would be possible, if the constructor so desired, to take the 12V supply via the two six-way DIN connectors.

Because the electrolytic capacitors C13 and C14 will probably have been lying on the shelf for a long time, it is advisable not to bring them up to full voltage too suddenly at first. Thus for the initial test of the hi supply, it is recommended that a 1W resistor of around 1kΩ be soldered across the contacts of the hi on/off switch S2. With the hi switched to low and on, switch on the mains. The hi at the positive tag of C13 will then rise to around 300V. Let it stand there for 1min or so and then switch the hi to norm. The hi will then rise to around 600V. After letting it stand there for 1min or so, switch the hi to on (ie shorting out the 1kΩ resistor), which will bring the hi up to around 780V. (Later, when the valves are fitted, this voltage will fall to around 670-730V, depending on the current being taken.)

Check that there is +200V at the output of the 200V supply, -49V at the output of the bias supply, and +12V at the output of PCB3.

Don't forget to remove the 1kΩ resistor after the above tests!

### Warning

Whenever working with lid and base removed and the mains connected, it is important to remember that there are high voltages present and to exercise the necessary vigilance. Some of the danger can be removed by covering PCB5, S1, S2, S3 and the input connections to PCB2 with a piece of card, 7 by 6in, held in place with masking tape.

Furthermore it should always be remembered that the hi reservoir capacitors C13 and C14 will not discharge immediately on switching off. To be on the safe side, it is advisable not to touch the hi—or the valve anodes—for 2min or so.

### Wiring and commissioning the linear amplifier

The linear amplifier can now be wired up, starting with the valveholders. All the earth connections to the valves should be taken direct to solder tags under the fixing nuts of the valveholders. The screen decoupling capacitors C4 and C5 should be connected direct from the valveholder to adjacent earth tags.

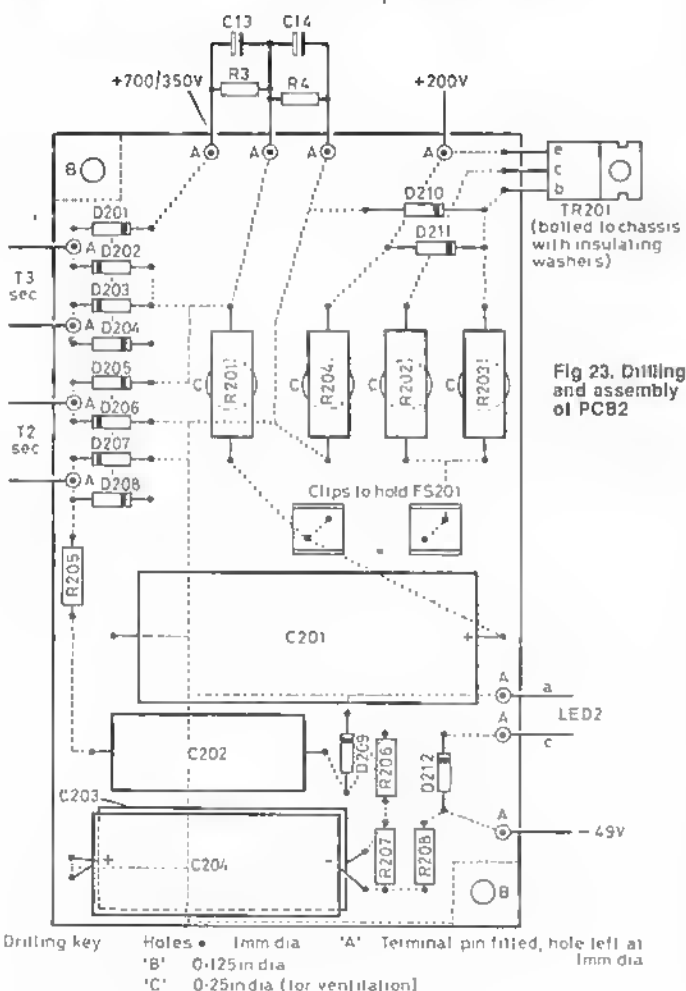


Fig 23. Drilling and assembly of PCB2

PCB1 should now be fitted and connected up. Ideally the connections to the TX PREAMP socket should be made with 50Ω coaxial cable, but a simple twisted pair has been found to be quite adequate.

The connection from C8 to PCB1 needs a special mention. Underneath the valveholders, and centrally between them, there should be a grommetted hole. Wedge or cement into this grommet a 4in length of rigid insulated wire which has had the insulation stripped away for 0.19in at each end (see Fig 8). A suitable wire can be extracted from a scrap piece of 2.5mm<sup>2</sup> house-wiring cable. One end of the wire is connected to the non-earthed tag of the compression trimmer C107 on PCB1. C8 is strung between the other end of the wire and the rear stator connection on the TUNE capacitor C9. Also connected to this stator connection is the "start" end of L1. If the wire from L1 is bared, the capacitors C7 and C10 can be soldered directly to this wire rather than have to go all the way to C9.

The other end of C7, together with chokes RFC3 and RFC4, are soldered to the lug at the end of RFC2. RFC3 and RFC4 are fixed directly to the anode clips.

The front stator of the TUNE capacitor C9 is connected to an earth tag just above the capacitor (hole "d" in Fig 12). C11 is taken direct from the switch to the LOAD capacitor C12, where it is soldered direct to the corner of the frame. RFC1 is connected to the two standoff insulators on the back panel. The decoupling capacitors C1 and C2 are earthed to the solder tags at the base of the standoffs.

The output from the pi network is taken via 50Ω coaxial cable. The inner conductor is connected to the lower rear stator terminal on C12, and the outer to an earth tag bolted to the chassis (hole "f" in Fig 13). The cable is run along inside the flange on the aluminium screen and taken through the grommet at the rear. As a temporary measure it should be taken direct to the ANTENNA socket, but later, when the antenna changeover module has been fitted, it will have to go to that.

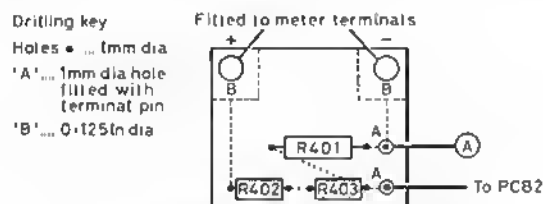


Fig 27. Drilling and assembly of PCB4

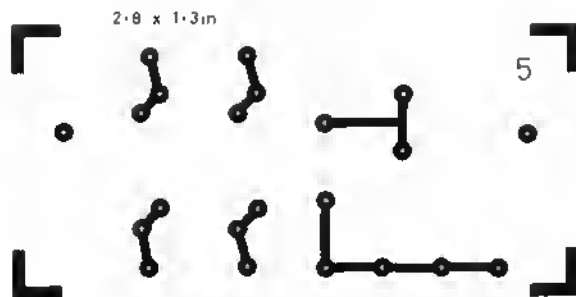


Fig 28. Etching pattern for fusa panel, PCB5

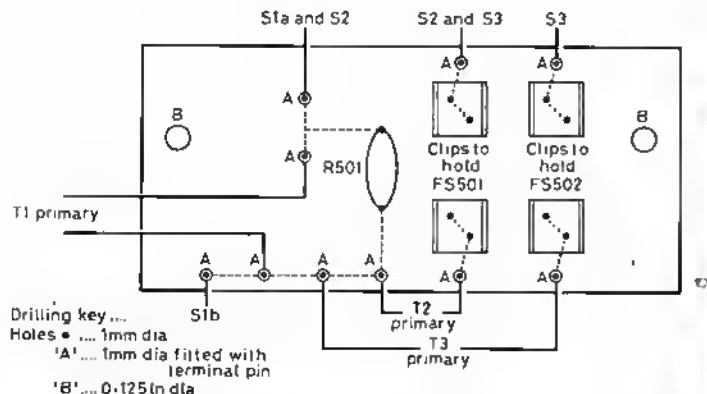


Fig 29. Drilling and assembly of PCB5

Testing of the linear amplifier can now begin. The essential items which will be required for testing are:

- A 50Ω dummy load capable of withstanding at least 25W.
- An swr meter or some other device which will give a rough indication of the power going into the dummy load.
- A meter capable of reading around 0-10V rf.

The initial testing should be done with the ht switched off. First check that there is 6.3V ac ( $\pm 0.2V$  or so) across each valve heater.

Connect the output of the transceiver to the TX PREAMP socket on the linear amplifier unit. Set the DRIVE switch to the appropriate band. Switch the transceiver to cw, clamp the key down and turn the TX OUTPUT control to give an output of about 2V. Clip the rf voltmeter lead to the insulation of the wire going to the valve grids (so as to minimize the loading of the meter on the tuned circuit) and tune the appropriate coil on PCB1 for maximum meter reading. Repeat for the other bands.

Neutralizing the internal anode-to-grid capacitance of the valves should be done next. This can be done on any frequency band, but for an optimum balance it is probably preferable to choose a middle-frequency band such as 7 or 14MHz.

The rf voltmeter is connected to the junction of the two anode chokes R3 and R4, and, with an rf input applied to the linear, but still with no ht applied to the valves, the TUNE and LOAD capacitors are tuned for maximum reading. The compression trimmer C107 is then tuned for minimum meter reading.

The ht can now be switched on and, with no rf input and the ht switch at HIGH, a check made that the valves take a total anode current of around 50mA (17mA on the scale if it has not been re-drawn). Should it be more like 70mA (23mA) it will be advisable to increase the bias voltage by adding a low voltage zener in series with the 47V one. The screen current should be low and thus LED1 should only be very dimly illuminated.

## Tuning up the linear amplifier

A continuous tone will be required for tuning up the linear amplifier. The easiest way of obtaining this is to switch to cw and hold down the key but, if available, a two-tone oscillator could be fed into the microphone socket.

With the TX OUTPUT control on the transceiver initially turned up just a little way, adjust the TUNE and LOAD controls for maximum rf into the dummy load. It should be noted that when the LOAD capacitor is set to a higher capacitance than that which gives maximum output, the valves are not fully loaded and the screen current (as indicated by LED2) is considerably higher. In fact the desirable setting is with the capacitor set slightly to the other side of the maximum output position.

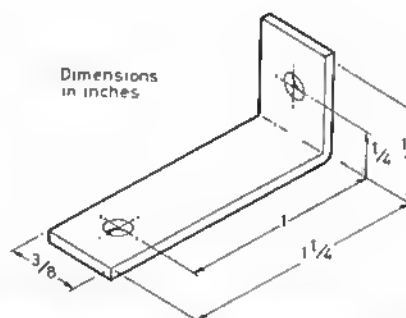


Fig 30. Brackets for fixing fusa panel PCB5. Material: 18swg aluminium or as available. Holes are 6BA clearance

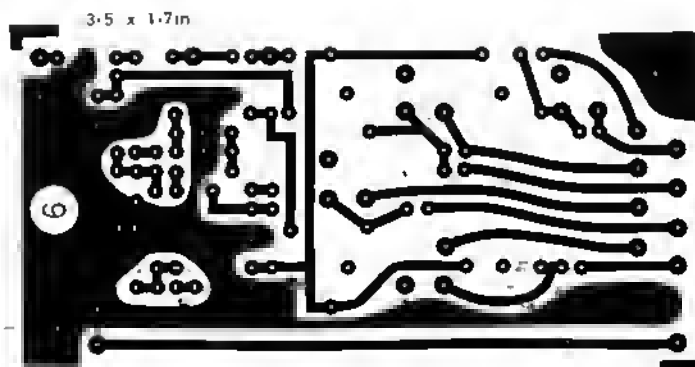


Fig 31. Etching pattern for receiver preamplifier module PCB6

Fig 32. Drilling and assembly of PCB6

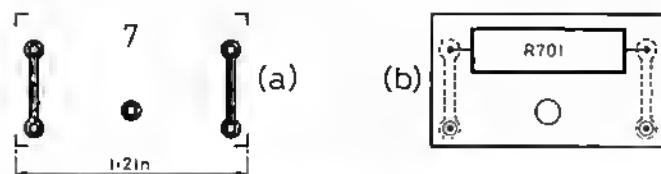
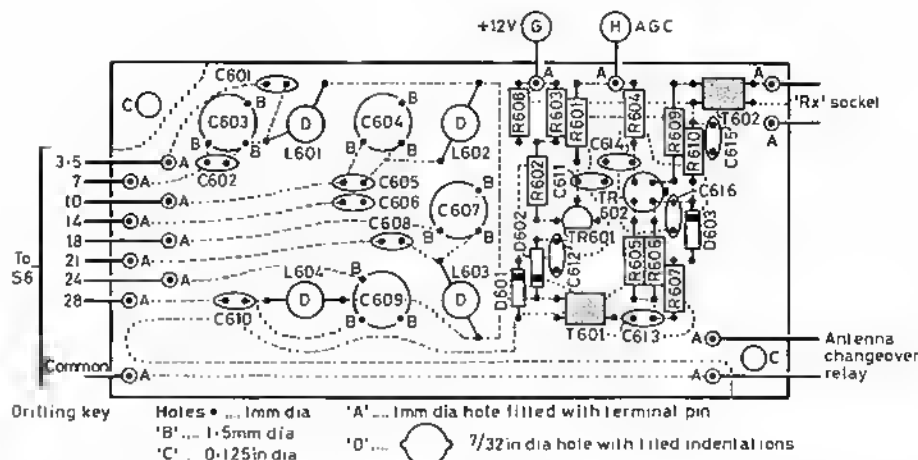


Fig 33. Board (PCB7) for mounting heater dropper resistor. (a) Etching. (b) Assembly

Thus in order to avoid overheating in the valves (and possible resultant damage), as well as undesirable waveform distortion, it is advised that:

- After the  $\text{LOAD}$  control setting for maximum output has been found, the control is turned slightly anticlockwise (ie to a slightly lower capacitance).
- The drive to the valves is kept below the point at which grid current occurs (shown by a brightening of LED2). Driving beyond this point will also give increased screen current and increased distortion.
- Full drive should not be applied to the valves if no output load is connected. This will also give high screen current.

The screen current can be monitored at all times by observing LED1. When operating at full power with a single continuous tone, the total screen current for both valves should ideally be around 12mA, but it should never be greatly in excess of this figure. In order to obtain some idea of what a current of 12mA means in terms of the brightness of LED1 relative to that of LED2, a check can be made by putting a voltmeter across R202 on the power supply board. A reading of 40V will correspond to a screen current of 12mA. The total anode current, when the linear is fully driven with a single steady tone, will be around 220mA (or 75mA if the meter scale has not been redrawn).

### Commissioning the receiver preamplifier

Having commissioned the power supply and the linear amplifier itself, the remaining tasks within the linear amplifier unit consist of (a) fitting the antenna changeover (A) board (PCB14) from the transceiver unit, (b) fitting the receiver preamplifier PCB6, and (c) wiring them up.

Then, in the transceiver unit, the output of the transmitter preamplifier needs to be connected directly to the TX socket, and the RX socket needs to be connected to the antenna changeover (B) board (PCB13). The DIN socket also needs to be connected up; pin 3 to the AGC line, pin 1 to the c/o relay energizing line (L), and pin 2 to earth.

A lead will have to be made up to interconnect the DIN socket on the transceiver with that on the linear amplifier. The use of a four- or five-way screened lead will leave some capacity for possible additional connections later.

With the two units fully interconnected, the receiver can be tested with its preamplifier. (Connect it to a real antenna now; otherwise the results will be disappointing!) On each band the appropriate tuned circuit on the preamplifier should be tuned for maximum gain. Where two bands share one coil, the coil should be peaked-up first on the band which has a fixed capacitor, and the preset capacitor used for peaking up on the other band.

### Modifications to include 1.8MHz

The modifications needed to extend the operation of the linear amplifier unit to include 1.8MHz will be described on the assumption that this is to be provided in addition to all the other bands. Suitable simplifications can be made by the constructor if he does not want an all-band capability.

The most important differences concern the pi network at the output of

the linear amplifier, the revised circuit being shown in Fig 34. The output switch S5 needs to have a third wafer, and the additional components L2 and C17 are required. L2 is wound on a 0.625in diameter former, which is 1.25in long and fitted with reasonably stiff leadout wires so that the coil can be suspended in the wiring.

Adapting the pi network to cater for 1.8MHz introduces some problems because, ideally, C1 and C2 need to have a very large capacitance swing. In order to accommodate the existing capacitors, the working Q of the circuit is arranged to be around eight instead of the more desirable value of 12. This allows C1, with suitable padding capacitance added, to cover the range 1.8 to 2MHz, with just a tiny amount to spare.

(Continued on page 261)

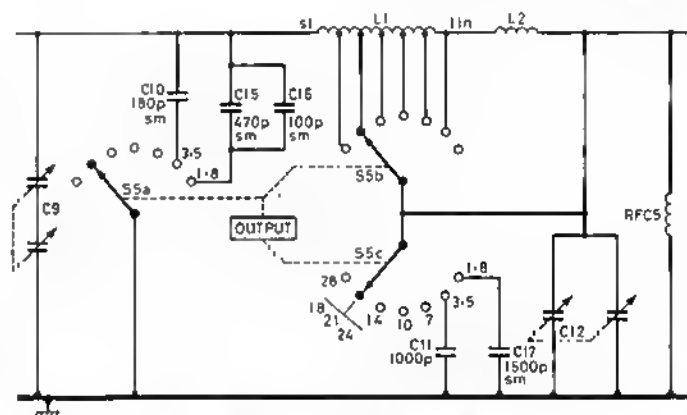


Fig 34. Revised circuit of pi-network to include 1.8MHz band. C15, 470pF; C16, 100pF; C17, 1500pF (all silvered mica). L2, 301 28swg enamelled wire closewound on 0.625in diameter former. S5 needs an additional wafer. Other components unchanged

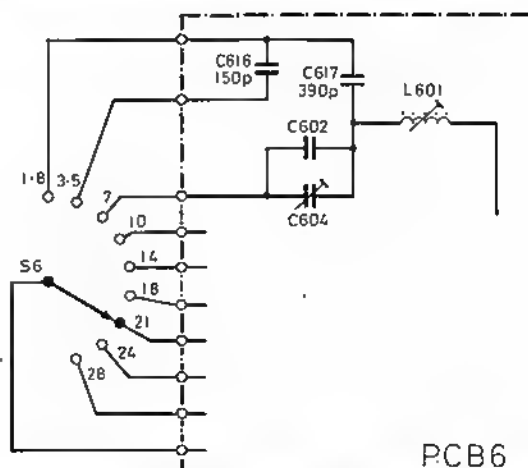


Fig 35. Modifications to receiver preamplifier switching to include 1.8MHz. C616, 150pF; C617, 390pF (both sub-min ceramic plate). Other components unchanged

# A 50MHz RECEIVE/TRANSMIT CONVERTER

D S Jones, GW3XYW\*

IN PREPARATION for the release of the 50MHz band, together with the increased availability of commercial equipment, I decided to design a receive/transmit unit for 50MHz. If a receive-only converter is required, the units have been constructed in such a way that the transmit section can be added at a later date. No originality is claimed for the circuits [1, 2]. They are reliable and I have used them many times on different bands throughout the past 15 years.

The various units are constructed on a single-sided pcb which should not be etched. Make the anchor points by drilling 0.052in holes and inserting metal pins. Where the pins need to be insulated, remove the copper by lightly countersinking with a larger drill (0.125in). If the pins are earth points, then they should be soldered in place. Combinations of single-sided, double-sided, earthed and insulated anchor points on which to mount the components are thus produced. Solder the feedthrough capacitors directly to the earthplane. This method of construction is clean, easy and suitable for rf, up to vhf, and, if a mistake is made, the hole can be soldered over and a new one drilled. To obtain the correct internal diameter, wind the self-supporting coils on twist drills. Screens (of tinplate or pcb) should be mounted as shown in Figs 1 and 3. A substantial heatsink should be mounted on a spacer in good thermal contact with the 2N6082 output transistor.

Alignment is simple and follows normal practice. A gdo is very useful for setting up approximate resonance, although if this is attempted with the fet stages, the drains must be disconnected, or the power applied, otherwise satisfactory "dips" will not be observed.

The 22MHz crystal mixes with the 50MHz input to produce sum and difference frequencies at 72 and 28MHz. It is the latter frequency which is tuned and selected by LC circuits. The reverse applies on transmit mixing. Any instability encountered around the rf amplifier stage can be eliminated by connecting a 6.8k $\Omega$  0.25W resistor across the T2 primary.

A series resonant trap (Ct and Lt) for 44MHz is included in the transmit amplifier chain—this helps to suppress any spurious output from the crystal oscillator second harmonic. It is recommended that the three finished panels are mounted either in separate boxes or in a single box with screens.

For the initial tune-up, a supply voltage of 12V is adequate, but in order to realize full power output the supply may be increased to 13.5V. An input of approximately 1mW is

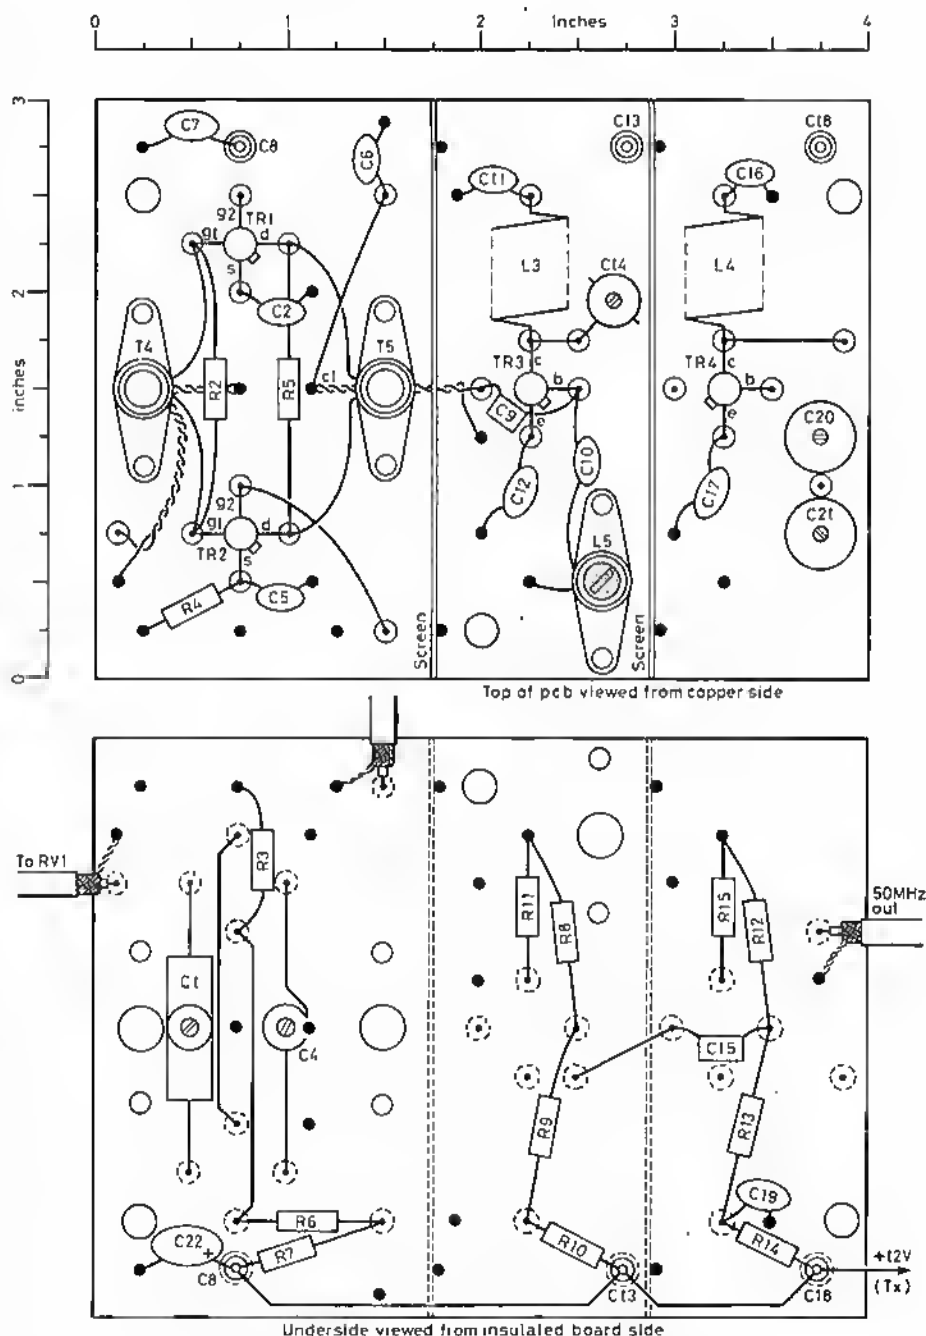


Fig 1. Transmit mixer/amplifier component layout

\*22 Alltango Road, Pontardulais, Nr Swansea, W Glam SA4 4HY.



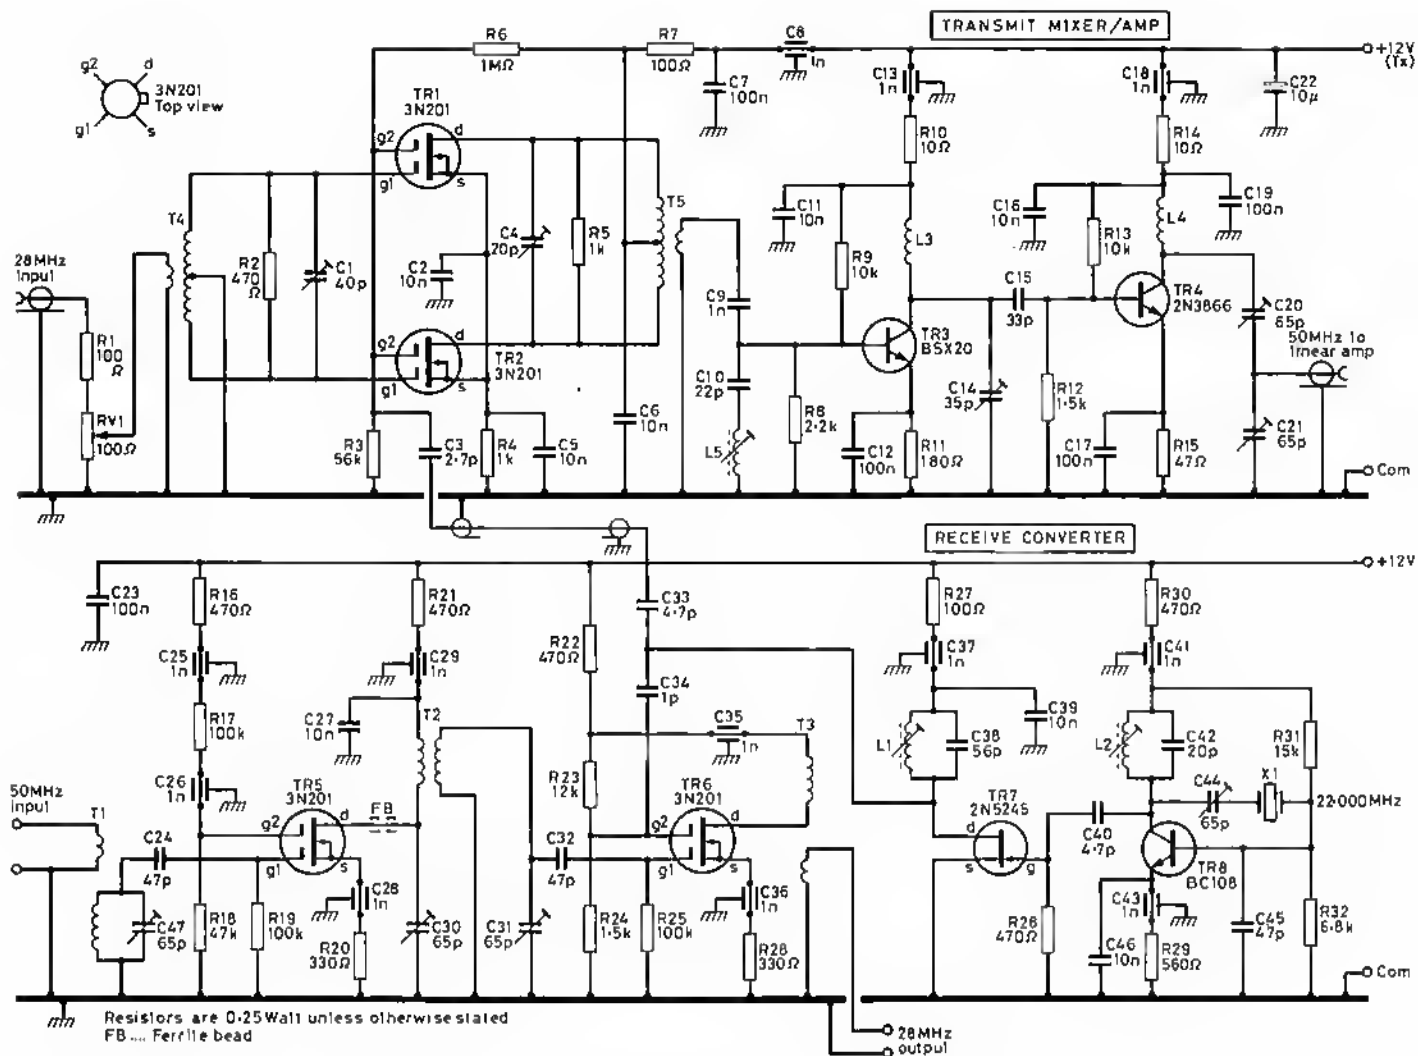


Fig 2. Transmit mixer/amplifier and receive converter circuit diagram

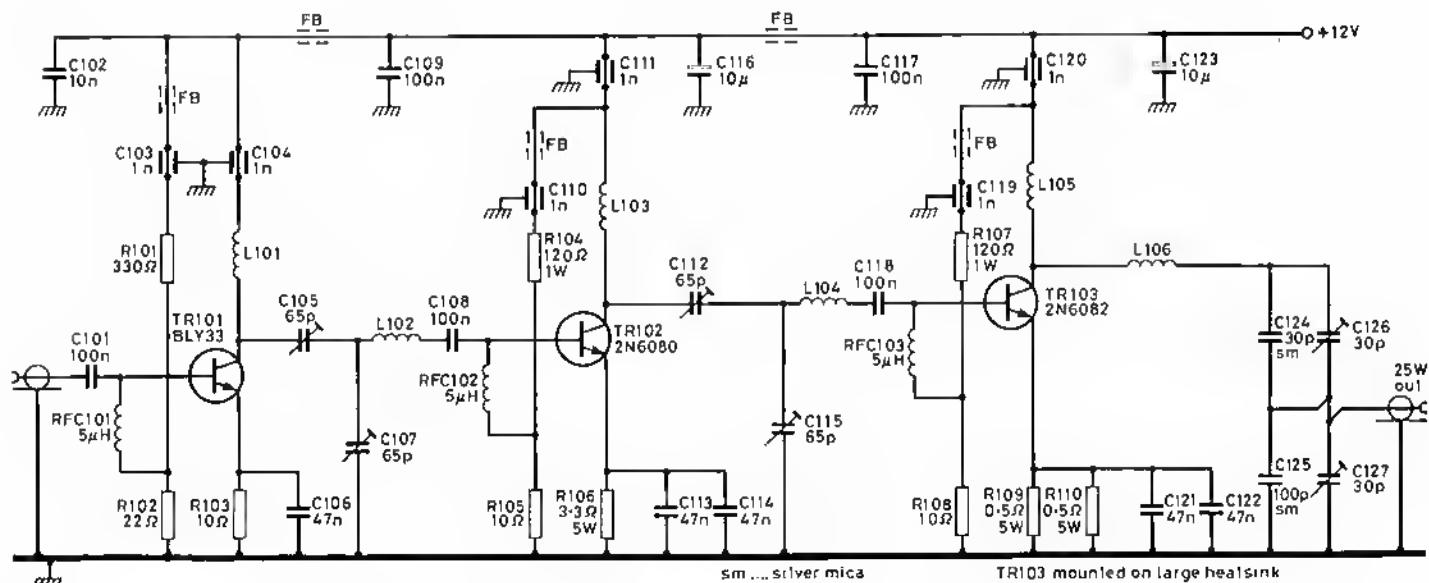


Fig 3. Linear amplifier circuit diagram

required for full output. Therefore, if the converter is to be used with a transceiver, a suitable attenuator should be included in the circuit.

## References

- [1] "Dual-gate fet converters for two and four metres", C W Westwood, G3VFD, *Rad Com* October 1969.  
 [2] "A 70MHz transistorized transmit/receive converter", D F Harvey, G3XBY, and C S Gare, G3WOS, *Rad Com* February 1977.

## Components list

### Transmit mixer/lamp and receive converter

|                        |       |
|------------------------|-------|
| R1, 7, 25              | 100Ω  |
| R2, 16, 21, 22, 26, 30 | 470Ω  |
| R3                     | 56kΩ  |
| R4, 5                  | 1kΩ   |
| R6                     | 1MΩ   |
| R8                     | 2.2kΩ |
| R9, 13                 | 10kΩ  |
| R10, 14                | 10Ω   |
| R11                    | 180Ω  |
| R12, 24                | 1.5kΩ |
| R15                    | 47Ω   |
| R17, 19, 25            | 100kΩ |
| R18                    | 47kΩ  |
| R20, 26                | 330Ω  |
| R23                    | 12kΩ  |
| R29                    | 560Ω  |
| R31                    | 15kΩ  |
| R32                    | 6.8kΩ |
| RV1                    | 100Ω  |

|   |              |
|---|--------------|
| C1  | 40pF         |
| C2, 5, 6, 11, 16, 16, 27, 39, 46              | 10nF         |
| C3  | 2.7pF        |
| C4  | 10pF         |
| C7, 12, 17, 19, 23, 24                        | 100nF        |
| C6, 9, 13, 25, 26, 26, 29, 35, 36, 37, 41, 43 | 1nF          |
| C10   | 22pF         |
| C14   | 35pF trimmer |
| C15   | 33pF         |
| C20, 21, 30, 31, 44                           | 65pF trimmer |
| C22   | 10μF         |
| C33, 40                                       | 4.7pF        |
| C34   | 1pF          |
| C38   | 56pF         |
| C42   | 20pF         |

|              |        |
|--------------|--------|
| TR1, 2, 5, 6 | 3N201  |
| TR3          | BSX20  |
| TR4          | 2N3856 |
| TR7          | 2N5245 |
| TR8          | BC108  |

|    |   |
|----|---|
| T1 | {Primary 2t 20swg 0.5in id enam copper<br>Secondary 7t 20swg 0.5in id enam copper                     |
| T2 | {Primary 7t 20swg 0.5in id enam copper<br>Secondary 7t 20swg 0.5in id enam copper                     |
| T3 | {Primary 25t 32swg enam<br>Secondary 2t 26swg pvc covered} Wound on 0.25in former with iron-dust core |
| T4 | {Primary 2t 28swg pvc covered<br>Secondary 6t + 6t 32swg enam} Wound on 0.25in former—no core         |
| T5 | {Primary 4t + 4t 26swg enam<br>Secondary 2t 28swg pvc covered} Wound on 0.25in former—no core         |
| L1 | 12t 24swg enam wound on 0.25in former with iron-dust core   |
| L2 | 20t 26swg enam wound on 0.25in former with iron-dust core   |
| L3 | 7t 20swg 0.375in enam copper  |
| L4 | 7t 20swg 0.375in id enam copper   |
| L5 | 9t 24swg enam wound on 0.25in former with iron-dust core  |

### LINEAR AMPLIFIER

|                               |         |
|-------------------------------|---------|
| R101                          | 330Ω    |
| R102                          | 22Ω     |
| R103, 105, 108                | 10Ω     |
| R104, 107                     | 120Ω 1W |
| R106                          | 3.3Ω 5W |
| R109, 110                     | 0.5Ω 5W |
| C101, 108, 109, 117, 116      | 100nF   |
| C102                          | 10nF    |
| C103, 104, 110, 111, 119, 120 | 1nF     |

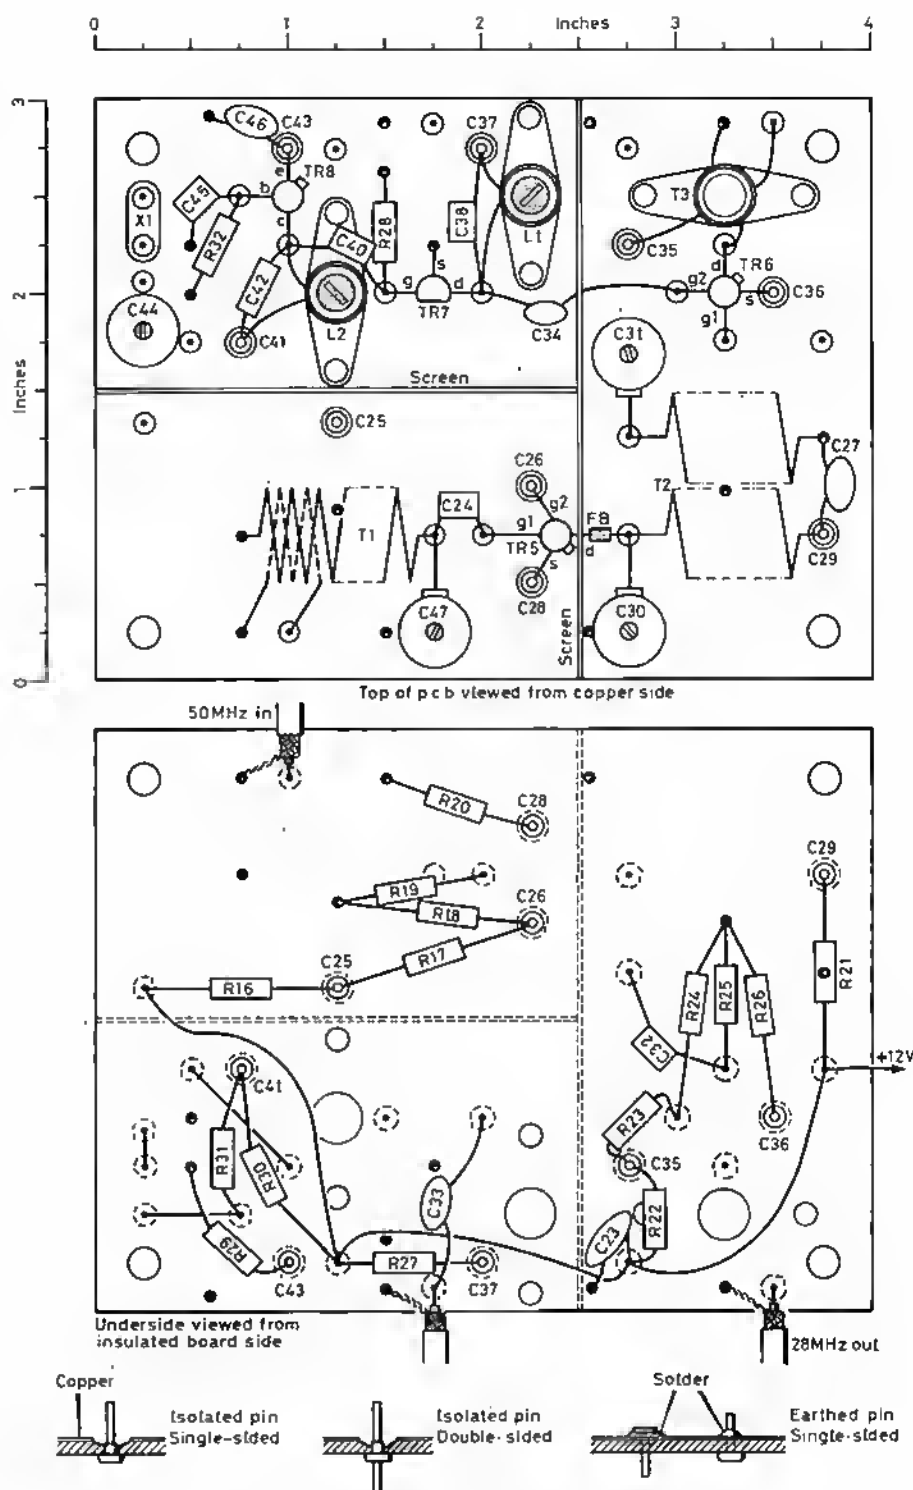


Fig 4. Receive board component layout

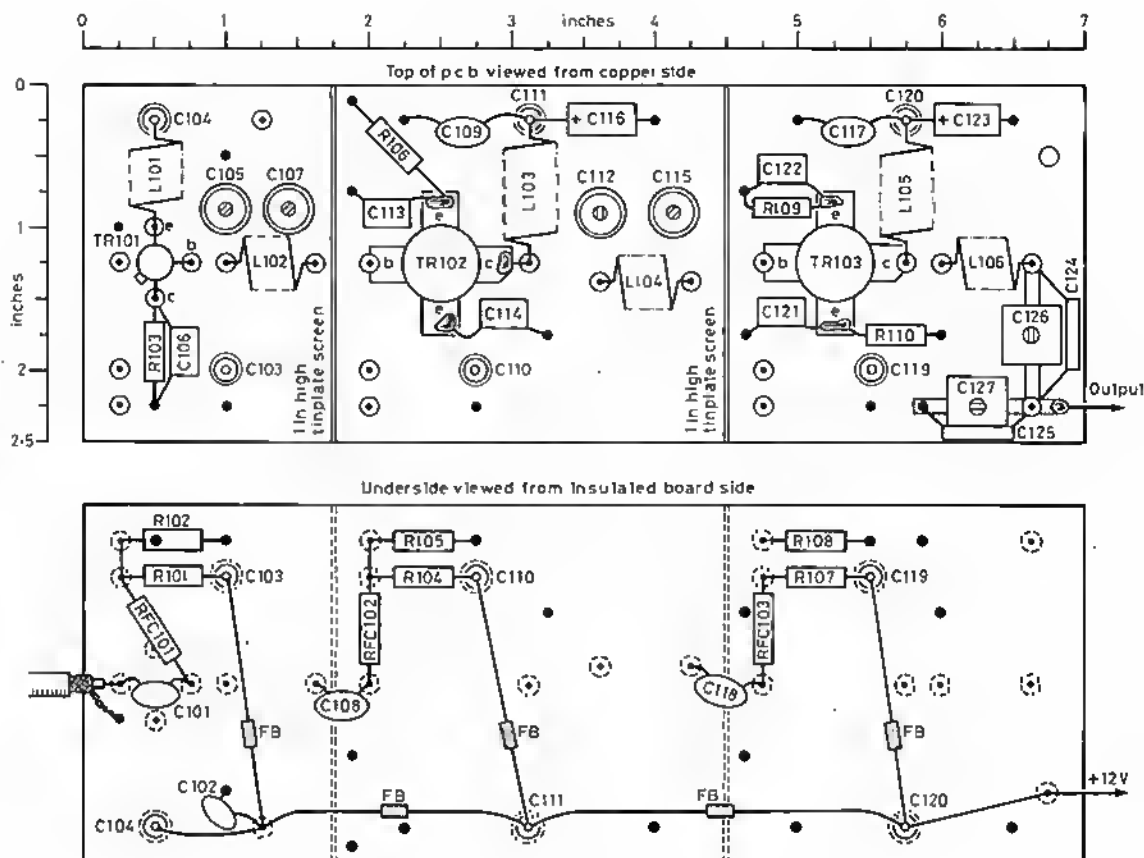


Fig 5. Linear amplifier component layout

|                          |              |                    |  |                 |
|--------------------------|--------------|--------------------|--|-----------------|
| C105, 107, 112, 115      | 65pF trimmer | L101               | 7t 18swg 0.375in Id                      | } tinned copper |
| C108, 113, 114, 121, 122 | 47nF         | L102               | 5t 18swg 0.375in Id                      |                 |
| C118, 123                | 10 $\mu$ F   | L103               | 7t 18swg 0.375in Id                      |                 |
| C124                     | 30pF sm      | L104               | 3t 18swg 0.375in Id                      |                 |
| C128, 127                | 30pF trimmer | L105               | 8t 18swg 0.375in Id                      |                 |
|                          |              | L106               | 7t 16swg 0.375in Id                      |                 |
| TR101                    | 8LY33        | RFC101, 102, 103   | 5 $\mu$ h vhf choke R S Stock No 238-255 |                 |
| TR102                    | 2N6080       | PCB (single-sided) | Plns R S Stock No 433-624                |                 |
| TR103                    | 2N6082       | PCB (double-sided) | Plns R S Stock No 433-630                |                 |
|                          |              | Twist drill bits   | 1.3mm (0.052in) R S Stock No 549-195     |                 |

## A LINEAR AMPLIFIER UNIT FOR THE HF BAND TRANSCEIVER

(Continued from page 257)

Because of the limited capacitance range of C1, it may be necessary to adjust the inductance of L2 in order to ensure full coverage from 1.8 to 2MHz. Thus the constructor is advised initially to put a few extra turns on L2 and remove turns as found necessary.

The range of the load capacitor C2 is also restricted. However, the precise loading setting is not so important on 1.8MHz, where the linear will not be working at its maximum power capability, and the consequences of this restriction will not be important, provided that the transmitter is working into an essentially resistive 50 $\Omega$  load.

Fig 35 shows the changes required to the receiver preamplifier switching. When S6 is switched to 1.8MHz, L601 has a series capacitance of 390pF (C617). When the switch is at 3.5MHz, L601 has a series capacitance of 108pF (C616 and C617 in series). L601 is tuned for maximum gain in the centre of the 3.5MHz band and C603 is tuned for maximum gain in the centre of the 7MHz band. On the 1.8MHz band the circuit should then be on tune.

At the input of the linear amplifier no tuned circuit is necessary for 1.8MHz. The DRIVE switch merely needs to have an extra blank position, which leaves R101 unshunted.

On 1.8MHz the linear amplifier must be kept below its maximum output capability in order to meet the licensing regulations. To assist in this, the h1 switch should be kept in the low position.

### Operation of the linear amplifier

With the h1 switch in the OFF position, the DRIVE and OUTPUT switches should be set to the required band. If the antenna does not look like approximately 50 $\Omega$  at the shack end of the downlead, an antenna tuning unit will be essential. Even if the antenna does look like 50 $\Omega$ , an atu is still useful to provide a little extra attenuation to out-of-band signals.

If an atu is used, it is recommended that the linear first be tuned up with a dummy load. Then, after connecting the linear up to the atu, the latter can be adjusted for minimum swr, and any final adjustments done using the TUNE and LOAD controls.

Throughout the tune-up procedure care should be taken, as outlined earlier, to avoid excess screen current. The valves will tolerate a great deal of mishandling but it is not advisable to tempt providence too far!

When operating, the peak level of the signal will be stabilized by the alc circuitry in the transceiver unit. Thus, once the TX OUTPUT control has been set to the required position, the p.e.p. of the output will be maintained at a constant level.

When operating ssb, the average anode current will be considerably less than with a continuous single tone of the same p.e.p.

### Enhancements to the transceiver

This concludes the description of the linear amplifier unit. Next month a complementary article will describe some enhancements which can be made to the transceiver unit itself.

# Technical Topics

by Pat Hawker, G3VA

THIS MONTH we range back and forth across the years of experimental amateur radio. From spark to smd, via valves. For it all began, at least in the UK, with the passing of the original Wireless Telegraphy Act, 1904. How easy it was at first: "It was only necessary to advise the Postmaster General of the intention to erect a wireless station (transmitting or receiving) and to fill in a form giving particulars of such installation, when an inspector would be sent to visit the station and a permit for its use would be handed to the owner. Later, one guinea began to be charged".

No RAE, no morse test, no being tied down to specific frequency bands. Little more than a morse key, earphones, a hefty spark, a crystal detector and lots of wire! But no wonder that the Wireless Society of London (forerunner of the RSGB) was soon alarmed at the number of complaints of interference with commercial and Government stations due to the use of "excessive powers and untuned aerials, by irresponsible experimenters". Regulations and morse tests came in the early 'twenties, RAE in the late 'forties. It seems we could not do without them.

First this month, an apology. Reading the page proofs of the March *TT* I panicked and decided I had inadvertently switched round two diagrams. The editor promptly made the correction and passed the issue for press. A day later I realised that the diagrams had been correct in the first place—so you got them with the wrong captions. What was shown in Fig 6(a) as a conventional active doubly-balanced fet mixer was in fact Ed Oxner's new mixer configuration. Fig 8 showed the conventional circuit. My apologies! Who would be a columnist!

## Costs of reliability

There is little doubt that many UK amateurs resent the fact that the prices charged for imported Japanese equipment by "authorized dealers" tend to be significantly higher than those charged for identical models in some other countries and by non-authorized dealers who import indirectly. In *TT* January 1984, p45, Kjell Ström, SM6CPI, the Yaesu Museum representative for Europe, explained that Japanese firms "encourage their agents to carry the necessary spare parts and to take care of customers long after the final cheque has been cashed". He felt that the emphasis on quality assurance and initial "burn-in" procedures at the factories meant the probability of failure of each individual component to be microscopic... "Because it would not make economic sense for manufacturers to seek out the few remaining potential failures, they expect these to be taken care of in the after-sales service, performed and paid for by the authorized agents... Buying from an authorized agent is a form of insurance".

Cynics could interpret this as meaning that while manufacturers do their reasonable best to make their rigs reliable they accept that inevitably a small number of less-than-perfect rigs will leave the factories and end up in our shacks, with the retail price geared to covering the cost of putting these right.

This is a commercially understandable policy, by no means unique to amateur radio equipment. But for customers it can give rise to some justifiable misgivings. For example, equipment that has to be sent back to the dealer once, or even twice, needs to be dealt with promptly and effectively or the unlucky purchaser is bound to feel aggrieved. There is the even more insidious problem that few of us have the full range of laboratory test equipment to determine whether or not equipments meet their design specification.

The *QST* account of the reviewer's difficulties and delays in obtaining a fully effective Icom 751 (*TT* January 1986, p34) highlighted this problem and has encouraged some *TT* readers to unfold their own horror stories. Meanwhile *Members Mailbag* continues to keep the Trio/Kenwood pot boiling.

Owen Kemp, G4TLK, for example, lists some of his experiences with well-respected Yaesu equipment:

FRG7700: display driver ic failed after two months' use.

FT77: intermittent operation over the first three months caused by a dry solder joint.

FT757: various faults in both transmit and receive modes over a period of 18 months, cured only by replacement of the rf board.

G4TLK is a professional electronics technician and recognizes how perverse equipment can be. But he feels that faults could be eliminated in

production by more rigid use of quality assurance procedures and less dependence on "after sales service" by authorized agents.

His place of employment has an effective three-day "burn-in" procedure which accelerates the ageing of components by operating them at an elevated temperature. This removes "infant mortality" and spotlights unduly temperature-sensitive components. Following this burn-in, each instrument is checked twice, once by a technician manually and then by an automated test system that avoids human error. Further checks are carried out independently by the quality assurance department, then finally by a standards inspector. This is very different, he suggests, from the simple batch testing usually considered sufficient for price-sensitive consumer electronics.

My own feeling is that we cannot have it both ways. Although the prices asked these days for amateur black boxes appear to be very high by historic standards, they are in fact very reasonable, indeed low, in comparison with the cost of British, European and American professional communications equipment. The Japanese cram a lot of facilities into their transceivers, largely because a few years ago they discovered a lack of demand for simpler "economy" models. Complexity implies less reliability without rigid quality assurance. But rigid quality assurance inevitably costs the customer a great deal of money. Few amateurs would be able to afford to buy equipment made to "mil-spec" and BS9000 standards, unless satisfied with extremely "simple" equipments. As long as amateurs go on demanding "all-singing, all-dancing" models they must necessarily accept that a proportion of equipments will require after-sales service and need careful "in-shack" checking out to the best of one's ability.

What the amateur has the right to demand is that if he pays the "insurance premium" of buying from an authorized dealer, he should receive courteous, prompt and effective after-sales service and, if necessary, prompt replacement of "rogue" models that never seem to be quite right. On the other hand, dealers are fully entitled to charge an "economic" fee for servicing equipments bought elsewhere—labour costs can be very high—though they may not do their reputation any good by simply refusing altogether to service models bought overseas.

The greatest difficulty that arises from complex equipment made to retail at budget cost is how the purchaser can ensure that his model is really up to spec. For example, the initial problem uncovered by NIFB in the ARRL laboratory on IC751, serial number 1114, was that an i.f. section was out of alignment. In some circumstances, in the absence of test equipment, slight misalignment of one or two stages could pass unnoticed for a considerable period of time.

## SMD and homebrew

On several occasions attention has been drawn in *TT* to the increasing use of tiny surface-mounted devices and related forms of hybrid microelectronics in virtually all branches of electronics, including amateur radio equipment. SMDs have made very rapid progress in Japan; rather slower progress in the USA and Europe, where equipment manufacturers point to the problems of reflow soldering tiny leaded and leadless surface-mounted boards with components on both sides, techniques on which most manufacturers of mass-produced equipment are only just beginning to get a grip. Then there is the cost of installing new highly-automated production equipment in an era when so much of the consumer market has been captured by Japanese industry. A single smd assembly line consisting of machines for surface-mount placement, soldering, testing and repair can cost around a quarter of a million pounds. On the other hand, the technology offers both manufacturers and customers significant advan-

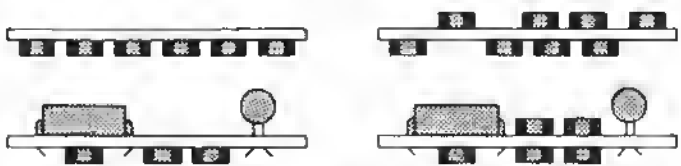


Fig 1. Surface-mounted components can be mounted on or below the printed circuit boards

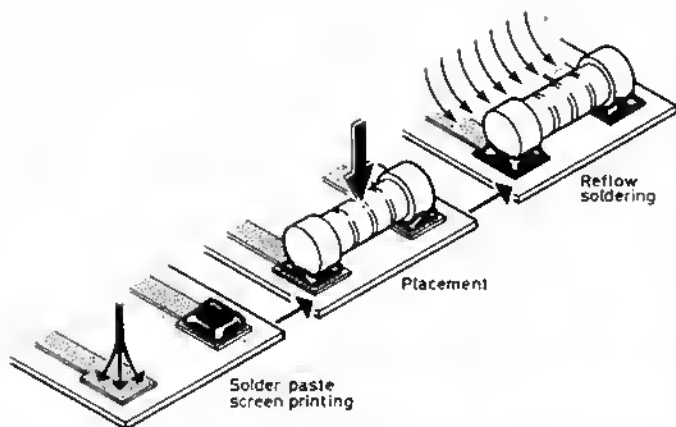


Fig 2. A standard procedure for fixing surface-mounted components on the upper side of printed circuit boards, using solder paste screen printing

tages: increased interconnection density, smaller pcb area, better and more consistent performance, and reduced manufacturing costs once the necessary production equipment has been installed (see "What's holding back surface mounting" *Electronics* 10 February 1986, pp25-29).

One result, both in the USA and Europe, has been the growth of specialized sub-contracting firms that undertake the design, production and testing of smd boards for the main manufacturers.

Recently I received a letter from Rex Waygood, technical director of Surface Electronics, a UK firm in Poole, Dorset, that specializes in miniaturization and surface mount production technology, thick-film hybrid circuits and the like.

He takes me to task for having suggested on various occasions that smd could represent a further blow to home-servicing and home-construction. Rather, he suggests, it offers amateurs a new set of challenges. He writes:

"Surface mount components are now available to the home-constructor, although I admit not as readily available as conventional components.

"To remove failed components, greater use has to be made of such devices as desoldering braid; solder suckers, other than expensive motorized versions, are of little use. (The outer braid from discarded coaxial cable can form an effective desoldering braid—G3VA.)

"For assembly, tweezers, a pot of RMA flux, a small soldering iron and a bench magnifier are really all that are necessary.

"In order to make the joints look more professional, a grill pan and a hot air paint stripper can be used to reflow the solder!

"The major difficulty with surface-mount assemblies is to design the pads and solder mask to produce a high first-time yield and a highly reliable joint for mass production. This is not a problem for the radio amateur, as his requirement is normally for a one-off board, therefore rework time is not significant.

"The major challenge to the home-constructor using sma comes in the manufacture of the board. The smaller pad sizes, pitches of 50-thou, 0.8mm and even 25-thou, and inevitably smaller tracks, 10-thou to 8-thou, will be a challenge. However, pcb manufacturers are using 0.5oz copper laminate to improve their own yields at these finer track widths. This will filter down to the amateurs. Also it will be found that, for several reasons, the board design will be double-sided.

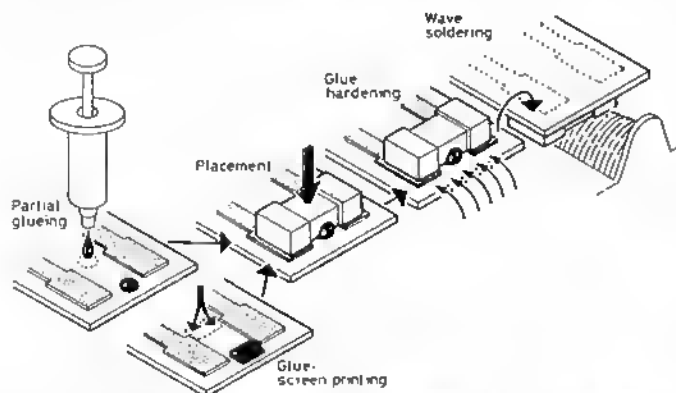


Fig 3. An alternative mounting procedure whereby glue is used to hold the component to the board during wave soldering, making subsequent removal of components rather tricky as it is easy to damage the board

"I accept the fact that it will be a brave amateur who applies a paint stripper to his newly-purchased surface-mount cmos micro, but no braver than the amateur with his first valve, first transistor, first fet, first gasfet or first micro!

"I am convinced that amateurs can and will rise to the challenges offered by sma and will come to exploit the size, cost and performance benefits offered."

A long and detailed article, "Surface mounted components—the quiet revolution" (*Electronics Australia*, July 1985) ended by discussing briefly their use by hobbyists:

"All the foregoing seems to indicate that electronics is progressing to the point where hobbyists will no longer be able to be involved because the components are just too small to handle. This is not necessarily the case. While chip capacitors and resistors are exceedingly small and difficult to handle, the larger packages are quite practical for use by hobbyists. Indeed, *Electronics Australia* has presently under development a circuit design using a surface mounting microprocessor."

One of the practical snags, it seems to me, will be identifying component values etc should they ever get mixed together. The situation for the ic packages, however, seems a little more hopeful, though I guess it will need those "hands-free" binocular magnifiers described in *TT* February 1983, p134 and May 1983, p428. It's a challenge we shall need to accept, though personally I still like components that are big and identifiable and carry their value with them, and can withstand lots of volts and/or milliamps. But who am I to stand in the way of "progress"?

### Don't fuse the neutral

In the February *TT*, Chris Trayner, G4OKW, commented on the safety hazard represented by the practice of connecting fuses in both the phase ("live" or "line") and neutral leads of mains equipment connected to three-pin mains sockets. Twin mains fuses were once common practice and can still be found occasionally, particularly in equipment for use on mainland Europe etc.

However, he was puzzled at not being able to trace a definitive reference to double fusing in the IEE Wiring Regulations or BS415. A number of readers have pointed out that in fact the IEE Wiring Regulations do cover this practice in relation to advice never to fuse earthed neutral conductors.

Brian Castle, G4DYF, refers to Paragraph 13.12 of the current IEE Wiring Regulations (15th edition with May 1984 amendments):

"No fuse, or circuit breaker other than a limited circuit breaker, shall be inserted in an earthed neutral conductor, and any limited circuit breaker in an earthed neutral conductor shall be arranged to break also all the related phase conductors."

David Rolle, GM3GRG, writes: I think Appendix 5 of the IEE regulations may cover this point:

"If the circuit has one pole earthed, the socket outlet is of the type that will accept only two-pole-and-earth contact plugs with single-pole fusing on the live pole. . . ." and

"If the circuit has neither pole earthed (eg a circuit supplied from a double-wound transformer having the mid-point of its secondary winding earthed) the socket outlet is of the type that will accept only two-pole-and-earth contacts plugs with double-pole fusing. . . ."

I can see that there could be a degree of confusion in the use of the term "earthed neutral conductor" in referring to the mains supply "neutral" since, as previously mentioned in *TT*, this lead must never be "earthed" by users, as a potential often exists between "neutral" and "earth". Nevertheless it should be appreciated that the neutral is earthed at an earlier point in the system, so that a supply taken from either a two-pole "lighting" bayonet socket or from a three-pin socket has, in effect, "an earthed neutral conductor". As pointed out above, the output from a double-wound transformer will not inherently be earthed and can require double-pole fusing.

GM3GRG also pointed out that it is worth considering the comments in the 1986 edition of the ARRL *Radio Amateurs Handbook*, Chapter 37 "Assembling a station". Although the American public supply system is not the same as ours, the comments underline the care necessary in diy electrical work. In the USA, apart from safety aspects such work can give rise to insurance problems. The ARRL notes:

"In some areas this work must be performed by a licensed electrician. You may need a special building permit for the work, and even if you are allowed to do the work yourself, you might have to get a licensed electrician to inspect the work."

Presumably this applies to the installation of permanent wiring, rather than to the connection of equipment fed from an already installed domestic socket; but, as has been stressed many times in *TT*, anything connected to 240V ac mains needs to be treated with caution and a recognition of the safety and fire hazards that can arise.

GM3GRG concludes with a couple of extracts from the old, 14th edition of the IEE Wiring Regulations: F8 "Every plug containing a fuse shall be non-reversible and so designed and arranged that no fuse can be connected in an earthed conductor." F5: "In circuits in which one pole is earthed at the source of supply, every socket outlet and plug shall be of the non-reversible type, with provision for earthing. This requirement does not apply to extra low voltage circuits or to the special low-voltage circuits referred to in Regulation F7." (Since writing these notes, further letters putting a rather different view have been received. More next month.)

## Valves—not just nostalgia!

The suggestion by KH6B of "Project 6L6" (77 February, p107), to mark the 50th anniversary of this once extremely popular valve and to encourage a degree of home-construction, has brought forth some nostalgic memories.

But is it just a nostalgic fad? Or are there still valid grounds for suggesting that those old valves can still play a valuable role in providing the means whereby simple, low-cost but effective cw-only transmitters can be built on the kitchen table? Unlike smd technology, there was little fear that an untimely sneeze would blow the equipment off the bench and leave you with the problem of trying to work out which component is which!

John Roscoe, G4QK, recalls the 6AG7, so useful as a doubler or driver, the pre-war RK39, the powerful wartime PT15 (used in the T1154). He strongly recommends the glass version of the 6L6; the metal version, apart from its inferior rf performance, tended to give off a nasty smell when it got really hot. He points out that an EF80 can furnish all the drive needed for a 6L6G.

Richard Q Marris, G2BZQ, makes no bones about still preferring valves to solidstate: "I use valves, as much as possible, for the simple reason that I like them—not that I have anything against transistors or those who use them. Similarly I use cw because I like it—I have a perfectly good 100W ssb transceiver but I seldom use it because it bores me. I have several of the old Codar AT5 transmitters and use these on 3.5MHz cw, deliberately under-running them at 10W input to preserve them. With a box of 7MHz crystals, a load of valves and a 'junk box' I am planning a low-power transmitter with a single 6V6 (the useful little brother of the 6L6). The old handbooks give plenty of advice and dodges on how to eliminate chirp from single-valve crystal-controlled transmitters. I enjoyed using valves in the old days. I enjoy using them now."

## Coping with the 4CX-series

In retrospect, the rf power valves available to amateurs from 1936–9 onwards, including the 807 and 813 beam tetrodes, 808, T20, T55, 35T power triodes were ideally suited to home-construction, being both rugged—in that they would withstand considerable abuse—and reasonably docile once the art of parasitic-oscillation suppression and/or neutralization had been assimilated.

Post-war valves were designed to provide greater gain and efficiency at higher frequencies, and improved cathodes were of high perveance (in other words, permitted much larger transient peaks of emission). The introduction of ceramic instead of glass for valve envelopes increased mechanical strength, allowed smaller physical size for a given power dissipation, and enabled valves to operate at higher ambient temperature; more effective dc-gassing during manufacture permitted greater emission for pulse operation. Nevertheless it must be admitted that high-perveance, high-gain valves require more care be taken in ensuring correct operating conditions if self-destruction is to be avoided. There is still much to be said for using the older style glass 813 for hf operation. And why leave those 807s in the junk box?

For high power at vhf/uhf, the 4CX-series has established a virtually unrivalled position. But it is important to realize that these valves, although rugged and capable of extremely good linearity, are "like no other" and require careful study of the data sheets, particularly in respect of close control of the screen volts if they are to approach the linearity of which they are capable. In 77 December 1985, John Nelson, G4FRX, with long experience of these powerful beasts, drew attention to the value of metal oxide varistors to prevent damage, particularly to the built-in screen bypass capacitors in the costly SK620 bases, from the flashovers that are all too common with these radial-beam high-gain tetrodes.

Several letters have been received on the use of 4CX-series valves, including comments from John Fournier, DC0HW, ex-G8LRH, and G D Eddowes, G3NOH, together with further comments from G4FRX. While these correspondents do not agree in some respects on why and how problems such as flashover arise so often with these valves, I have endeavoured to sort through three long letters to find common ground on some of the operating precautions that should be taken to achieve good performance over a long lifetime, without the non-linear splatter that too

often occurs.

G4FRX emphasizes that the inter-electrode spacing is extremely small in order to achieve good performance up to 500MHz, but that this is not the primary reason for flashovers, which he suggests can arise from at least four causes. Then again, in some respects, the 4CX-series resemble the older form of screen-grid tetrode: all radial-beam tetrodes display screen-grid secondary emission under some operating conditions of drive and anode and screen voltages. He writes: "All 4CX250Bs can be expected to source screen current under certain common conditions of drive and loading. For example, a correctly-loaded and driven 4CX250B with 2kV on its anode and 350V on its screen can be expected to source about 5mA of screen current when driven to 250mA anode current."

Varian-Eimac point out in their application notes that the single-tone screen current can be used to establish correct loading. Their data sheet shows that under several commonly-encountered operating conditions the screen current can be expected to be negative. This is due to a form of "secondary emission", though not quite in its classical form. Every 4CX250B pa, G4FRX stresses, should have a meter (preferably of off-zero type) in the screen circuit for tuning and loading purposes.

Light or no loading of a 4CX250B frequently leads to flashovers, as explained by G4FRX in *Short Wave Magazine* in considerable detail in a series of articles about five years ago.

There is no doubt that the screen-grid power supply for this series of valves needs careful design, preferably with shunt regulators and capable of sourcing and sinking at least 40mA for negligible change in the screen voltage. High-voltage transistors and improved regulators with higher loop gain are proving an important advance on the older valve regulators. DC0HW and G4FRX are in agreement about the vital importance of adequate cooling, with the blower "over" rather than "under" dimensioned.

G4FRX stresses that the correct heater supply is  $6.0V \pm 5$  per cent, not 6.3V. He also mentions that loss of heater emission is uncommon and that these valves are more often pulled from professional sockets due to a degree of softness that increases secondary emission etc. Difficulties can thus be experienced with "ex-equipment" valves although, in view of the high initial cost, this is a common route for amateurs to take.

## Control circuits for the 4CX250B

In a separate contribution, G D Eddowes, G3NOH (Flat 1, 47 The Avenue, Ealing, London W13 8JR) suggests some requirements in designing the control circuits for high-power 4CX250B amplifiers. He writes: "The 4CX250 type of valve can be expensive to buy new; the popular alternative is to obtain the 'used' version, and when a couple of gooduns are eventually found, the relieved owner obviously wants to take good care of them. Taking good care includes correct switch-on procedure and adequate cooling of the valve. The circuits described achieve both of these requirements."

"The sequence of events I use when switching on is:

- (a) Blower on.
- (b) Heaters on, 10s later.
- (c) Bias supplies on soon after or at the same time as the heaters.
- (d) Anode volts on about 2min after the blower, and
- (e) Screen volts on about 2min and 30s after the blower.

"Fig 4 shows a suitable delay to use for the switch-on sequence. Capacitor C1 is charged through R1 until the potential at pins 1 and 2 of the ic is high enough to produce a logic 0 at pins 3, 5 and 6. A logic 1 is then present at the base of the transistor, TR1, and the relay is made, thus making the particular circuit. Table 1 gives suitable values of C1 and R1 for the timings required."

"Another important contribution to the lifespan of the valve is to keep the blower running for at least 3min after switch-off, and this is achieved by the circuit of Fig 5. A separate 12V supply is needed, the mains supply of which is taken from the same mains supply that feeds the blower. On switch-off, C2 is charged and is supplying a logic 1 to pins 8 and 9 of the ic and, going through the logic 1 is on the base of TR2 and the relay is

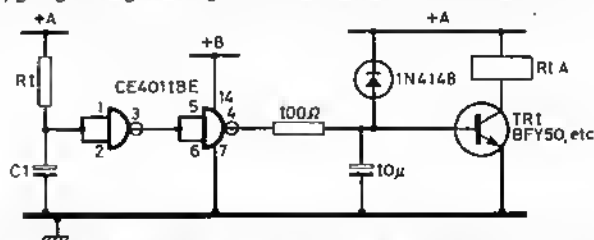


Fig 4. Delay logic for switch-on operations. Note that the supply for the ic is positive. For suggested component values for R and C, see Table 1



| Delay    | C1 and C2   | R1 and R2     |
|----------|-------------|---------------|
| 10s      | 4.7 $\mu$ F | 2.2M $\Omega$ |
| 2min     | 100 $\mu$ F | 1.5M $\Omega$ |
| 2min 30s | 100 $\mu$ F | 1.8M $\Omega$ |
| 3min     | 100 $\mu$ F | 2.2M $\Omega$ |

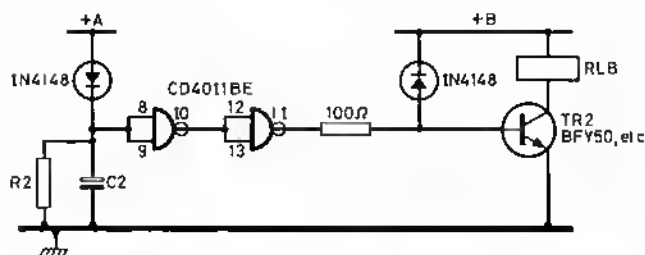


Fig 5. Delay logic for switching-off. Positive A supply is the general 12V line. Positive B supply must be maintained after switch-off and can be derived from the mains supply that feeds the fan. R2 and C2 component values are in Table 1

made. When the potential on pins 8 and 9 has dropped because of R1, the logic at the base of TR2 will be a 0 and the relay will break, thus disconnecting the blower.

"A snag I have come across is when the blower inductance is high and the relay contacts do not have much of a gap; the result is a chattering relay and burnt-out contacts! This is due to the spark inducing volts into the transformer that supplies the de volts for the relay and charging up the smoothing capacitor. The answer is to keep the value of the smoothing to about 22 $\mu$ F, but this produces a side effect: not enough coulombs in the dc supply to keep C2 going. My 5min delay ended up with no R2 and a capacitor value of 220 $\mu$ F.

"As far as protection for the valve in the event of anode volts being lost, I have found that a 50mA quick-blow fuse in the screen supply is adequate. There are circuits around that detect the presence of anode volts, but I have never found one to be necessary. (G4FRX disagrees, he would not trust a 50mA fuse).

"The mains supply switching is shown in Fig 6. The neutral is not switched, but if the live connector is fused and the polarity is correct it will be safe. If switching of the neutral is required there are four-pole mains switches available.

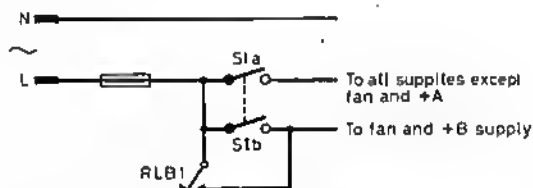


Fig 6. Arrangement of mains supplies

"The relays I use are 700 $\Omega$ , and I have a limited number available but without bases."

G4FRX is a little uneasy about G3NOH's switch-on sequence. Eimac suggest that no other supplies should be applied until 1min after the heaters are turned on (although it seems unlikely that anything untoward could occur from earlier application of the bias supplies as in the G3NOH procedure). But the point he stresses is that the screen grid should always be tied to earth or to 300V and never allowed to float with anode volts applied, as this will almost certainly lead to flashovers etc. He adds that Eimac no longer recommend keeping the blower running 3min after switching off the heater.

## Getting on 50MHz

Whatever one may feel about the desirability of encouraging more home-building or improvisation of equipment, it is equally important that full use should be made of all our valuable frequency allocations. There is little doubt, for example, that, particularly in sunspot minimum years and after dark in maximum years, 28MHz is terribly under-used and vulnerable to take-over bids. More converted cb rigs, in the hands of licensed amateurs, could help us to retain the present width of the band!

It has been said that the reason why 70MHz has never attracted the level of activity justified by its useful propagation characteristics is because, being virtually a UK-only allocation, it has never been a target for Japanese

firms. This is not the situation on 50MHz. Not only are there plenty of transceivers available from the major manufacturers (including many at power levels that need to be fed to inefficient antennas through high-loss feeders if they are to meet the current power restrictions) but also 50MHz is within the frequency band used by military vehicles, including tank sets.

The commercial models include 10W and 85W transceivers, 2.5W handhelds etc, such as Icom 551 (10W), 551-D (85W), Trio TS-660 (10W), TS670 (10W), Yaesu FT680R (10W), FT726R (10W), FT690R (2.5W) etc. There are also transceivers such as the Microwave Modules unit (144 to 50MHz) and Yaesu FTV700 (28 to 50MHz). Crystal-controlled receiver converters include the Microwave Modules MMC 50 to 28MHz for use with an hf communications receiver.

On the military side, the older Plessey units such as C42, B47 and PRC261 can get you on the band, though receiver sensitivity may need to be improved by a front-end or masthead preamplifier.

The vhf radio sets in operational use by Nato forces all cover 50MHz, though the tuning steps tend to be 50kHz or higher and bandwidth is a nominal 25kHz.

The following are some still operational models:

|         |       |             |                 |
|---------|-------|-------------|-----------------|
| SEM-25  | 26.05 | to 69.95MHz | In 50kHz steps  |
| RT-68   | 38    | to 54.8MHz  | In 100kHz steps |
| VRC-353 | 30    | to 76MHz    | In 25kHz steps  |
| ANP-524 | 30    | to 75MHz    | In 50kHz steps  |
| RT-3600 | 26    | to 69.95MHz | In 50kHz steps  |
| SEM-35  | 33    | to 76MHz    | In 50kHz steps  |
| VRC-65  | 30    | to 75.95MHz | In 50kHz steps  |
| VRC-12  | 30    | to 75.95MHz | In 50kHz steps  |

Some of the broadband masthead iv amplifiers, such as the Labgear CM8065 (42 to 800MHz), can be used to increase sensitivity, though it goes against the grain to draw attention to untuned vhf/uhf amplifiers which, in their customary application, make tv sets and vcr machines horribly susceptible to rfi due to overload from 70, 144, 430 or even 28MHz amateur transmitters.

The stringent erp restriction on UK operation suggests that for optimum performance it would be good strategy to use a non-gain omni-directional transmitting antenna (eg a "turnstile" arrangement of horizontally-polarized dipoles) plus a high-gain multi-element receiving antenna. Remember that even if separate antennas are used it will usually be necessary to protect the receiver or preamplifier front-end transistors.

## Short backfire antennas

Many years ago in *TT and ART*, I drew attention to the backfire vhf/uhf antennas originally developed about 1960 by H W Ehrenspeck.

The basic principle was to mount a multi-element Yagi looking in the opposite direction to the target area, with the signal directed into a large plane reflector screen with a rim (rather like a large saucer lid).

The theory was that the signals would be reflected back through the Yagi array so that the elements would, in effect, act twice. Attempts by amateurs to achieve similar results were not altogether successful.

However, one form of this antenna, known as a short backfire antenna (sba) dispensed with the line of Yagi director elements and comprised simply the large back "saucer-lid" reflector plate (about 2 $\lambda$  diameter), the small front disc reflector (0.4 $\lambda$  diameter), plus the dipole. In this form, the backfire antenna has become well known among professional designers. The overall length of the structure was only about 0.5 $\lambda$ , and the structure

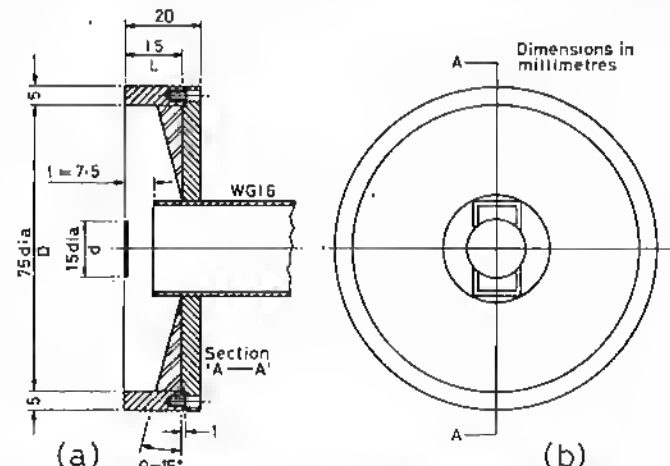


Fig 7. Mechanical details of the 10GHz rectangular waveguide (WG16)—excited short-back antenna with a conical rim

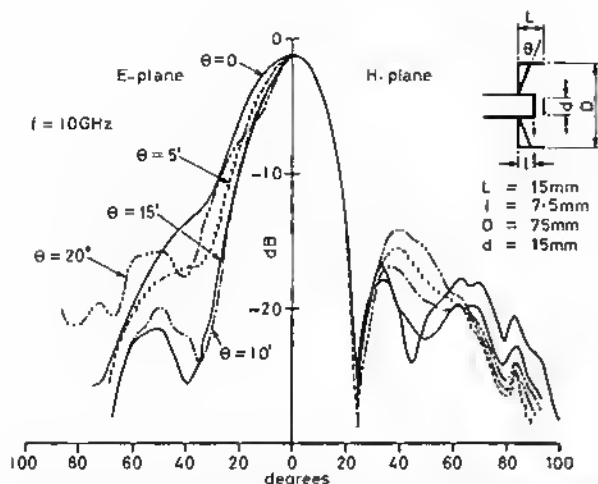


Fig 8. Measured E- and H-plane radiation patterns with conical main rim reflectors of slant angles ( $\theta$ ) of 0, 5, 10, 15 and 20°. 10 or 15° provides optimum pattern

was not unlike a Cassegrain parabolic-reflector antenna but without the production difficulties of the parabolic shape. It was claimed that an sba could give up to 15dBi gain, equivalent to a much longer Yagi of over 20 elements.

More recently various improvements to the basic sba have been reported both at vhf/uhf (L-band) and at 10GHz (X-band). It was found (*IEEE Trans AP-31*, pp644-6) that significantly improved bandwidth could be obtained by replacing the large plane reflector by a curved surface. Later it was reported by M S Leong and P S Kooi (National University of Singapore) in *Electronics Letters*, Vol 20, No 18, 30 August 1984, pp749-51, that a conical main reflector can lead to a compact antenna having a directive gain of 16.7 to 18.3dB, sidelobe level below 13.8dB, and input vswr better than 2.5 over a 20 per cent bandwidth. The experimental model (Figs 7, 8) was, in this case, a waveguide-excited sba covering 9 to 11GHz, and thus suitable for the amateur 10GHz band. At this frequency the beamwidth and sidelobe level of the antenna was optimum at 10GHz when the slant angle of the conical surface is around 10-15°. Construction is simplified by the fact that the main reflector is a separate unit as a plane surface, with the conical surface in the form of an attachment to this main reflector plate. The sub-reflector disc is positioned by means of a thin low-permittivity plastic support. At lower frequencies the same basic technique could presumably be used with a coaxial fed dipole element rather than wave guide excited.

## Antenna basics

At virtually any frequency, hf to microwave, physical size is important, and it becomes difficult to use short elements, particularly in close-spaced arrays. As pointed out recently by Clifford H Freeman (Hazeltine Corporation) in "Wideband matching of a small disk-loaded monopole" (*IEEE Trans AP-33*, No 10, October 1985) electrically small antennas pose a major problem with respect to their electrical performance. He writes: "These types of antenna have radiation resistances which decrease rapidly with size. As a consequence, tuning and matching become very difficult to compute. With these concepts in mind, the antenna efficiency deteriorates and performance parameters, such as bandwidth, tend to decrease to unacceptable levels. Therefore, designing compact antennas which are efficient in spite of their electrical size is a very difficult task."

For microwave antennas, physical size is less a problem than the need for mechanical precision. For this reason alone, an antenna having a large effective bandwidth, relatively straightforward mechanics, and without the difficult doubly-curved parabolic shape, should prove attractive. The parabolic dish has many good points, including the potential of very high gain. The Yagi array gives excellent gain in relation to its size, but is frequency sensitive and by no means fool-proof in practice. With care, stacked Yagis can give even higher gain, though one should not expect that, for example, four stacked similar arrays will give more than some 5dB extra gain, and often less, rather than the theoretical 6dB.

There is, indeed, often so great a difference between free-space theory and practice when it comes to questions of antenna characteristics, that many amateurs have come to rely on commercial designs even though this is still no guarantee that their performance will meet fully the claims made for them. It is a pity that no matter how logical technically, the 50MHz power limits have been based on effective radiated power (erp), an entity

that none of us can measure directly. I have for many years argued that even professional broadcasters are stretching credibility to the limit by listing transmitter powers in terms of kilowatts erp or emrp (effective monopole radiated power) to three places of decimals. The answer I am usually given is that this is the figure that comes out of the computer based on the requisite coverage area!

## Loops and dipoles

A short note in January *TT* (p 35) commented on loop and dipole antennas from a QST article by J L Dietrich, WA0RDX. This has prompted Les Moxon, G6XN, to comment as follows, as he feels that readers could have been misled into attempting to put up some enormous loops as soon as the weather turned more spring-like.

"It is good to come across some recognition at last for the fact that 14MHz (1λ) quad loops work well on 21MHz. Unfortunately the claims made for larger loops generally based on computer studies appear to go well beyond the no-penalty multiband operation of loops featured hitherto.

"On theoretical grounds, as well as practical experience over many years covering this particular area, I find there is no substance in the suggestion that larger loops provide appreciably more gain or smaller loops less gain, nor is there any validity in the comparison, in this respect, with dipoles—though these do not show any significant gain variation with size either. The reference to a 3λ/2 dipole is presumably a misprint for 3λ/4, in which case the gain is 0.6dB over a λ/2 dipole, or 1dB over a very short dipole.

"What appears to have been overlooked is the strong vertically-polarized signal in the plane of the loop which results when the loop size is increased. For a 3λ/2 loop, ignoring ground effects, we have the following field strength ratios:

$$\frac{\text{vertical in plane of loop}}{\text{horizontal at right angles}} = \begin{matrix} 0.79 \text{ (square loop)} \\ 0.61 \text{ (delta loop)} \end{matrix}$$

"This does not help with the QRM situation, but fortunately there is less energy wasted in the unwanted mode than these figures might suggest, since it is produced by an "8JK-pair" having a gain of 3 to 4dB. On this basis the losses due to the unwanted mode come to 1.17dB and 0.67dB respectively, and these must be deducted from the 'stacking gain' obtained by considering the loops as a pair of dipoles having the appropriate spacing. Another small correction arises because the length (or width) of the antenna affects the width of the forward lobe; this is the 'short dipole' effect mentioned above about which there is little published information. I have derived some very rough estimates by finding the centres of gravity of the current distribution of each half of the radiator and then treating it as a collinear pair having very close spacing. This can be done by using the mutual impedance data available in the handbooks. This gives a somewhat too low figure in the case of a λ/2 dipole (0.25 instead of 0.4dB) but this is to be expected in view of the unsymmetrical nature of a λ/4 current distribution, and the extra weight which should be given to contributions from near the ends. On this basis I feel that the method is basically sound and the other corrections unlikely to be in error by more than 0.1dB. This results in Table 2.

Table 2. Dipole and loop performance

| Type of element        | Stacking gain (dB) | Unwanted mode loss (dB) | "Length" correction (dB) | Gain (dB) dBi |
|------------------------|--------------------|-------------------------|--------------------------|---------------|
| λ/2 dipole             | —                  | —                       | —                        | 0 2.15        |
| λ/4 dipole, end-loaded | —                  | Up to 0.2               | -0.25                    | -0.45 1.7     |
| 1λ square loop         | 1.12               | Very small              | -0.32                    | 0.8 2.95      |
| 3λ/2 square loop       | 2.5                | 1.17                    | -0.1                     | 1.25 3.4      |
| 3λ delta loop          | 0.75               | 0.67                    | 0                        | 0.08 2.23     |
| 3λ/4 delta loop        | 0                  | 0 (approx)              | -0.25                    | -0.25 1.9     |

\*eg, bent ends as in VK2ABQ antenna.  
Note: Stacking gain for the 3λ/2 square loop assumes equal currents in the "dipoles". The actual ratio is 0.67 but it is very difficult to allow for this. The true gain figure could be as low as 3dBi.

"Note that the differences are in the main trivial, and single-element gain figures tend to disappear in the case of arrays, in line with normal stacking principles. In practice one is much better off with the smaller loops, since one can prevent sides or lower portions from radiating by arranging that current nodes occur in their centres. This increases the effective height, which may often be increased still further by taking advantage of smaller size and lower windage.

"Returning to the January *TT*, I am quite happy with Table 1, less so with Fig 3 in view of the misleading conclusions which appear to have been drawn from it. It may be no more than a coincidence that the gain for 3λ/2 exactly equals the stacking gain for dipoles spaced by the width of a 3λ/2 square loop, and it may be that the circular shape does provide extra gain equal to the 'mode loss'. Application of my square-counting methods to circular loops is extremely laborious and I have not attempted it."

# NEWS & VIEWS

## HF

**John Allaway, G3FKM\***

THE MOVE by the New Zealand national society, NZART, to draw attention to the very real damage which ill-conceived expeditions and operation from countries where amateur radio is not really welcome can do to the amateur service has apparently not received universal understanding or acclaim. I would be the first to admit to having enjoyed the competitive element involved in working dx and acquiring certificates. However, I wonder whether exercises like the ill-fated expedition to the Paracel Is a few years ago really did win any friends for amateur radio.

From time to time, stations claiming to be in Bangladesh appear on the bands. The president of BARL, the official Bangladesh national radio society, is in London at the time of writing and is able to confirm that no such activity is authorized. Even if the user of a callsign with an S2 prefix (or suffix) is where he claims to be, would the unlicensed activity convince the government of that country that radio amateurs are responsible and law-abiding people? A similar situation arises in Mozambique, where it has also been confirmed that amateur radio is not permitted and, in fact, has not been since 1978.

The ARRL dx programme administrators most certainly realize the danger and insist on proper documentation before allowing credit for contact with this kind of station. Would readers not agree?

The lack of activity on the WARC bands is noted by many. No doubt the current restrictions on 18 and 24MHz and propagation make these of rather limited interest. However, 10MHz is capable of producing nice dx contacts for long periods daily and is well worth a try. G3YY, one of the regular users of the band, asks for more activity there, with special emphasis on using the upper part of the band as well as the small area above the lower limit.

### DX news

*DXpress* notes that there is now a dx information net on 14,212kHz between 1400 and 1530 every Saturday, and SV1PL and EA6MR are in charge.

VQ9QM is to be found on most days between 14,020 and 14,025kHz from 1500 onwards. FT8XB has now left Kerguelen Is, and it is thought that there is no amateur in this year's relief team. F6AGP is now in Adelle Land with the callsign FT8YA, and will remain there for the rest of 1986. The crew at DP0GVN was also changed in February, and DJ6TN and DG5SL returned home—DJ4SO, who acted as their QSL manager, ended his service on 1 March. The new operators are DF9LX and DL3OAY and they hope to be very active—their QSL manager is DL2NF. The station is located at Atka Bay in the Antarctic.



L to r: Lloyd Colvin, W6KG, Iris Colvin, W6QL, Julius Lieberman, ZS6AF, visiting ZS6AF's station late in 1985. Iris and Lloyd made 6,500 QSOs with 143 countries when operating as W6KG/ZS from the Johannesburg Radio Centre of the SARL

\*10 Knightlow Road, Birmingham B17 8QB.

D68CF has been worked on 14MHz ssb and is F6EUF. 4S7PVR, who owns a guest house in Sri Lanka and who allows operation from his station by visiting amateurs, is having some equipment problems. However, more information on accommodation is available from P V P Pereira, 84 Templars Road, Mt Lavinia, Sri Lanka.

ON7IP/ST2 will be on the air for about a year. *DX News Sheet* says that hand-written QSL cards have been received from ST4BCB who operated at the end of 1985 and who was located at Beida in W Sudan. DJ1US/ST3 appears to have been a pirate, as DJ1US is at present a ship's radio officer. 6T1YP and 6T2MG have been active on 14MHz ssb and are Sudanese nationals, the former possibly operating from the Palace of Youth & Culture in Omdurman.

In spite of the recent unrest in Uganda, DG3MAT has been visiting 5X5GK and operating from there. He is hoping to obtain his own call. DXers may be interested to learn that ZD9BV is often active around 2200 on 3,793kHz. Stations recently heard from Tanzania include 5H3CE, who has been worked on 7,075kHz around 1900, and 5H3ZR and 5H3BH who have been on 14MHz ssb (below 14,200kHz) a little earlier.

ZX0ECF, the Brazilian station on the S Shetland Is, has been reported by *DX-NL* to have had strong signals on 3.5MHz ssb around 0600. CE9AM is in the same area and has been on between 2300 and 0100 on 14,205-14,210kHz. From S Georgia VP8LB has been reported at 0230 on 7,010kHz and asking for QSLs via an LU station—this callsign does not appear in the *Callbook*.

VR6JR made around 12,000 QSOs before leaving Pitcairn Is on 23 January. There is a new operator on the island, Irma Christian, VR6IC, who is expected to be active mostly on cw. FW4AF keeps a schedule daily at 0815 near 14,285kHz with F8RV, G4VHB or QSL manager F6IJV. His callsign has been changed from FW8 to conform with the new French system.

KS6DV/KH1 will remain on Canton Is until January 1987. There is the possibility that he may have access to the log periodic antenna used previously by the military and more recently by T31AT. ZL8OY will be on Kermadec for the rest of 1986.

The Tokyo University ARC was due to be on the air from Chichijima (Ogasawara Is) from 27 March to 3 April and may have left by now. Callsigns were to be JA1YWX/JD1 and JA1ZLO/JD1, and they hoped for many contacts through Oscar 10. New Chinese stations include BY4RN, who is on 14MHz and is located in Nanjing, and BY8AC who has been worked on 14MHz cw and is in Chengdu. According to the *DX Family Newsletter*, BY5RF seems to be the most active at the time of writing. The station is mostly operated by a y1 Ruan from the Youth Palace in Fuzhou, and she is on the air most days from 0030 to 0330, and again between 0630 and 0900 mostly in the 14,150-14,180kHz area or on 14,240kHz.

XU1SS has become active again, mostly on Thursdays and at week-ends around 1200 near 14,150kHz, and some 7MHz operation is expected soon. BV0DA was formerly XW8BP, and JH1ARJ is able to help with QSL requests—the demand so far has caused him to have more cards printed. New Taiwan stations are BV5HA and BV6IA.

According to HS1AMH, club stations will become active in Thailand soon, and permits for individual stations shortly afterwards. HS0A is permanently installed and ready to operate.

JY9RL is reported to be active on 7MHz cw after 2200, and also on 3,799kHz from midnight. OD5LX is now only active on 21MHz cw, using a groundplane antenna which has been damaged by military activity. There seems to be a group of Turkish stations to be found near 3,600kHz at about 2000—participants include TA1E and TA2D.

Jack, HB9TL, will be PJ4/HB9TL from Bonaire between 11 and 25 April, and from Aruba as P4/HB9TL between 26 April and 3 May. He prefers 14,027, 14,143, 14,194, 14,204, 21,027, 21,194 and 21,275kHz. PY7PO/PY0F will remain on Fernando de Noronha for the remainder of 1986. CE0ZIJ has been working in Europe at 0900 on 3,780kHz, and *DX News Sheet* also says that CE0GYS and CE0GYT are licensed on Easter Is and are the sons of CE0ERY.

Geir, JW5VAA, will remain on Bear Is until next month. JW5E is the club station on Svalbard and may be found near 14,200kHz between 1700 and 1900 on Tuesdays before the club's weekly meeting.

The new French prefixes FA and FB are now being issued—the former for vhf only. TV6BFI will be on the air until 30 June and celebrates the bicentenary of the birth of Marc Seguin, a noted engineer; it is located in Annonay, France.

Those who worked OY7ML may find that they contacted a pirate. Martin was not on the air on 7 February at 1600 as he was at work. He is not home on working days before 1800, and suspects that the person using his call may be in the Balkans.

Jacky, F6GXB, who has been associated with a number of expeditions, handles QSLs for F6GXB/TK, FB8WI, FB8XAB, FB8ZQ, FO8IK, FO8KP, J28CE, TT8AQ, TT8CW and YJ8GX. He now lives in Japan and



The visit to BY1PK in Beijing by VS6s BQ, CI, CT, and W2NSD. Back row (L to R): Huang Yong Lian, Deputy Secretary of Foreign Affairs, CSA; Wang Xun, deputy secretary-general, CRSA; Tong Xiao Yuong, manager of BY1PK. Front row: Bob Frost, VS6BQ; Roger Clark, VS6CI; Phil Weever, VS6CT; and Wayne Green, W2NSD.

his address will be found in "QTH Corner". He cannot obtain a Japanese licence.

ZL1AMO was due to begin operations from Tonga at the end of February as A35EA, then go to West Samoa as 5W1CW, where he was to be joined by ZL1BQD to proceed to the Tokelau Is where they hope to operate as ZK3RW and ZK3RR respectively until 19 April. Ron will do most of the cw operating and Ray (ZL1BQD) most of the ssb. All bands 3.5 to 28MHz will be covered.

### Overseas news

Andy Porter, G0BZW, is now in Nairobi and on the air on 14MHz most Saturday and Sunday mornings as 5Z4EV, and trying to penetrate the eastern European aluminium curtain to work back into the UK—a task he finds quite difficult.

W3HKN, who acts as QSL manager for 225 stations, has recently been out of action due to sustaining a broken arm. Anyone waiting for a QSL from him is asked to be patient!

"Heard Island Odyssey", by Kirsti Smith, VK9NL, is a most interesting account of the 1983 expedition to Heard Is which took place in face of great difficulties. A copy may be obtained by air-mail by sending US \$14.45 to HIDI-Y, PO Box 90, Norfolk Is, 2899 Australia. Purchase of the book helps the expeditioners to recoup a little of the very large amount of money which they spent on the trip.

Osten Magnusson, SM5IDQC, has compiled a list of VS9 stations which contains the calls of some 80 VS9s, and he invites anyone to send £1, US \$2, or four ircs, to him at PO Box 110, S-59900 Odeskog, Sweden, for a copy.

Ray Baldwin, G3WZ, operated from a bungalow in the sugar fields of Barbados for three weeks recently, having taken his FT901D and the driven element of a TB3 beam with him. Conditions were poor but the weekend of the magnetic disturbance resulted in good long-path openings to VK and ZL. Ray noted the ineffectiveness of those making long calls under poor conditions. Thirty-six UK stations were worked from 8P9AQ, out of a total of about 570 QSOs with 71 countries. QSL cards are being printed, but Ray says that the long job of writing them is not helped by the knowledge that about half do not really want them, and it is a mystery why some elbow into pile-ups of those who want a card. Finally he wonders what hf conditions were to be like at 25 and 50 days after the aurora, and says that expeditions are possible most easily if you can avoid hotels, but that luggage weighs a bar unless money is no object!

### General items

The reciprocal licensing agreement between Japan and the FR of Germany will come into effect on 1 May.

REF has notified a new address for its QSL bureau following the recent society reorganization. This is now: REF QSL, BP 273, 81209 Mazamet Cedex, France. In metropolitan France Class A licensees will use the prefix FA and are allowed 20W of phone on 144MHz. Class B use FB and 144MHz phone plus 7,020–7,040, 14,050–14,100, 21,050–21,150, 28,000–28,100 and 144,050–144,090kHz cw. Both classes are available at age 13. Those who are at least 16 are Class C (as Class A but with 100W input) and use the FC prefix. Class D have phone and cw on all bands and the FD prefix. After holding an FD licence for three years the Class D may become Class E and have 250W on all bands with an FE or F prefix. Radio clubs now use FF. In TK, FG, FH, FK, FM, FO, FP, FR, FY and FT the numbers 1 to 5 signify Classes A to E respectively.

### 1986 28MHz COUNTRIES TABLE

|          |               |
|----------|---------------|
| G4XAH—14 | G4MUW—8       |
| G3XQU—13 | G3XBM—6 (ORP) |
| G4QBK—12 | 5B4DN—2       |
| G4JBR—12 | G4YWG—1       |

From 28 February telephony operation in the segment 7,075–7,100kHz by General, Advanced, and Extra Class licensees is allowed by stations in Hawaii, Alaska, Navassa Is, US Virgin Is, Puerto Rico, Desecheo Is, and US bases in Antarctica.

5Z4FB (formerly G3CAT) has read the final paragraph on page 950 of December 1985 *MOTA* concerning topband with trepidation. He points out that the allocation in Kenya is confined to the segment 1,830–1,850kHz and that this includes all modes.

### SSTV

Very little activity is reported to this column, but G1BSN draws attention to a very nice contact made between G4HCK and VK2ADE on 25 January using a BBC micro, a fast-to-slow-scan interface and Robot monitor. The contact lasted more than half an hour and signals were S5–7 throughout. Both stations would be interested in other sstv QSOs on Saturday mornings, and are invariably monitoring the sstv frequency segment (14,225–14,235kHz).

### Welcome . . .

. . . to the following new members from outside the UK who joined the Society during January: DA2QJ, DH2NAF, EI1DH, EI5FD, EI8EM, F9LP, LX1GH, SM3ALR, VE1QN, VK5IK, WA2NCT, W6NA, YC0BCA, 4X4FL, and listeners I Tough (ZC4), D Blofield (A6), E McKenna and W Polion (EI), J Quinn (W6), and A Toto (I). Apologies to Rudolf van Straten, PA0UHF, who was accidentally listed as an unlicensed new member in *MOTA* under this heading last October.

### Awards

#### The IARU Region 3 Award

The requirements for this award were modified at the recent Region 3 Conference. It is issued to those who have contacted the requisite number of countries since 5 April 1982. The basic award requires seven countries, and Silver Star and Gold Star endorsements are available for 15 and 20 respectively. An updated list of qualifying countries is: Japan, Australia, New Zealand, Korea, Philippines, Hong Kong, Thailand, Papua New Guinea, Fiji, Singapore, India, Indonesia, Malaysia, Sri Lanka, Tonga, W Samoa, Solomon Is, and new additions Brunei, US Possessions in the Pacific (KH2, KH0, KH8, KH9, KH1), Pitcairn Is, and Chagos. Only FO8 QSOs count for French Polynesia. QSLs are not required but applicants should send a certified list of log extracts plus NZ \$1 (or NZ \$2 for airmail) to NZART Awards Manager, ZL2GX, 152 Lytton Rd, Gisborne, New Zealand.

#### AMRAC Data Award

This is being sponsored by the Amateur Radio & Computer Club and is available to those who have made QSOs on rtty, amlor, or packet radio. All QSOs must have been made since 1 February 1986. There are four classes: Class 1 requires 100 points; Class 2, 75; Class 3, 50; and Class 4, 25. It is necessary to include contact with 20, 15, 10 or 5 AMRAC members respectively. Send a list of claimed contacts, certified by two other licensed amateurs, together with £0.85 to Richard Hill, 157 Highbury Grove, Cosham, Hants. There will be some special AMRAC stations, and QSOs with these will count as two points. Note that a station may only be worked once for credit.

#### St George's Day Award

Issued by the Witsbech & District R&E Club. HF applicants need to contact either of the special stations GB0SGD or GB4SGD (which will be on the air between 20 April and 17 May). In addition UK applicants need eight QSOs with England during that period, Europeans need five G QSOs, and others three G QSOs. Listeners may also apply. Send log details to Dave Wilkinson, G4KHF, "Leon", Luton Gowts, Long Sutton, Spalding, Lincs PE12 9LQ, accompanied by £1.50, six ircs (from Europe) or eight ircs or US \$3 from elsewhere.



G3GIQ (I) with Spyros, 5B4MF (aged 17) in his penthouse shack—from which the horizon is visible in all directions



## QTH CORNER

**BY6IA** PO Box 738, Tainan, Taiwan.  
**BY5RF** Box 209, Fuzhou, PR of China.  
**C53EZ** via EASBEX, Jose Antonio 31, La Nucia, Alicante, Spain.  
**ex:** Jacky Calvo, 5-10-5 Shlmomeguro, Meguro, Tokyo 153, Japan.  
**F6GXB**  
**DL4HAD/** T Dreyer, Haakesir 87a, D-2100 Hamburg 90, FR Germany.  
**ST2**  
**TA1KA** PO Box 109, Istanbul, Turkey.  
**TA2G** Box 14, Emek, Ankara, Turkey.  
**VE3CPU/** VE3CPU, 5 Romko Ct, St. Catharines, Ont, L2R 4J1, Canada.  
**VP2M**  
**V09QM** W4OM, 928 Trinidad, Cocoa Beach, Fla, 32931, USA.  
**W6LJZ2** Yasme Foundation, Box 2025, Castro Valley, Cal, 94546, USA.  
**ZK3RR** } via ZL1AMO, R Wright, 28 Chorley Av, Massey Henderson, Auckland 8, New Zealand.  
**ZK3RW** }  
**3V8PS** via I1FOU, Via Novara 62, I-28024 Gozzano, Italy.  
**JG1FVZ/** JF1SEK, H Takahashi, 438-76, Tsutsumidai, Noda, Chiba 277, Japan.  
**SN0**  
**SV7AS** Dr S Alescio, Via G. Lama 67, I-90019 Trabia, Sicily, Italy.  
**8P9AF** VE3LGI, 40 Mumey St, Belleville, Ont, K8P 3N7, Canada.  
**8P9AQ** R Baldwin, G3WZ, 1 Meadow Ct, Whitepansh, Salisbury, Wills SP5 2SE.

## Worked All LA Award

New rules for this award are now in operation. OSOs with LA and LB stations since 1 January 1950 are required—applicants outside OZ, OH, SM and LA need confirmation from each of the 19 counties. OSOs with JW and JX may be made and may substitute for counties W, X, or Y. Any bands/modes may be used and band/mode endorsements are available. The counties are: A=Oslo; B=Oslofjord; C=Akershus; D=Hedmark; E=Oppland; F=Buskerud; G=Vestfold; H=Telemark; I=Aust-Agder; K=Vest-Agder; L=Rogaland; R=Hordaland; S=Sogn og Fjordene; T=More og Romsdal; U=Sor-Trondelag; V=Nord-Trondelag; W=Nordland; X=Troms; Y=Finmark. Send OSOs or detailed list of claimed OSOs certified by an officer of a national society, plus N Kr 20 or 10 lrcs to: NRRL Award Manager, Erik Johnsen, LA7AJ, Kaupangrua 21, N-3250 Larvik, Norway.

## The 10th Asian Games Award

This is being issued by the Korean Amateur Radio League to mark the 10th Asian Games which will take place in Seoul, between 20 September and 5 October this year. Applicants for the dx class award need to make contact with (or have confirmed reception reports from) 10 countries participating in the games, one of which must be Korea. These are: A4, A5, A6, A7, A9, BY, DU, EP, HM, HS, HZ, JA, JT, JY, OD, S2, V8, V86, VU, XV, XW, XZ, YA, YB, YI, YK, 4S, 4W, 7O, 8O, 9K, 9M, 9V and HL. The special station HL86AG will be on the air during the event, and OSOs from this station will count as five participating countries. For the Class HL Award, 10 Korean stations must be heard/worked and for this HL86AG counts as five. A certified list of OSOs plus US \$4 or 10 lrcs should be sent to reach KARL, CPO Box 162, Seoul 100, Korea, no later than 20 September 1987. Extra prizes, such as special stamps or Asian games mascots, will be issued to award winners.

## Contests

Apologies to G3VMY whose score was overlooked in the table of results of the CQ WW DX Contest (CW) 1984. He scored 9,548 points on 14MHz in the ORP section and was the only UK entry in that category. He has also pointed out that in the 1985 ARRL DX Contest (CW) G3ZFC, G3XWZ and he were actually in the section reserved for stations running less than 10W output.

In the results of the 1985 SP DX Contest, G3ESF scored 27,720 points and G4QKN 7,476 in the multi-band section, and G3XWZ 3,528 points on 3.5MHz. GM3MHG scored 12,872 points and GM8SO 5,400, also in the multiband category.

## Helvetia Contest

1300 26 April to 1300 27 April  
 CW and ssb. 1.8-28MHz (but no ssb on 1.8MHz). Mixed mode only, single- and multi-operator, and listener categories. Exchange RST plus serial QSO number (from 001). Swiss stations will send two letters which denote their canton. Each OSO counts three points, and a station may be worked once per band only. The multiplier is one for each canton worked on each band. Use separate log sheets for each band, and please note that stations with more than one per cent of duplicates incur automatic disqualification. Enclose summary sheet listing the number of OSOs and cantons worked on each band, entry category, and entrant's name, call sign and OTH. Enclose a signed declaration that all rules and regulations have been observed, and post by 31 May to Walter Schmutz, Gantrischweg 1, CH-3114 Oberwiltach, Switzerland. There are 26 cantons, and their abbreviations are: AG, AI, AR, BE, BL, BS, FR, GE, GL, GR, JU, LU, NE, NW, OW, SG, SH, SO, SZ, TG, TI, UR, VD, VS, ZG and ZH.

## Peace to the World Contest

2100 10 May to 2100 11 May  
 Phone and cw, 3.5 to 28MHz, and satellites RS and Oscar with downlinks on 28MHz from 144MHz (which count as an additional band). Activity must take place within the following segments: (cw) 3,505-3,600kHz, 7,005-7,100kHz, 14,010-14,100kHz, 21,010-21,100kHz and 28,010-28,200kHz; (ssb) 3,600-3,650kHz, 7,040-7,100kHz, 14,150-14,350kHz, 21,200-21,450kHz and 28,400-29,100kHz. Exchange RST and serial QSO number (from 001). USSR stations send oblati number. Each OSO within one's own continent counts one point, outside it three. There are single-operator single- and multi-band, multi-operator all-band single transmitter (includes club entries), and listener categories. A station may be worked once per band only. The multiplier is the number of "R-150-S" countries worked on each band (note: OSOs with own country count for multiplier credit only). Send entries by 1 July to CO-M Contest Committee, PO Box 88, Moscow, USSR. In the 1985 event UK scores were as follows: (3.5MHz) G3ZRH 3,190, G3CCZ 1,444; (14MHz) G4VCO 4,862, G6NKK 4,368, G4YMB 1,422, G4FDC 1,106; (21MHz) G4RRK 5,208; (multi-band) G3ESF 17,500, G4XKR 34,371, G3TFF 21,090, G4XTM 15,211, G4UOL 14,762, G4XRX 13,392, G4QKN 11,194, G4UVB 7,866, G4IJW 5,680, G3ICG 4,625, G4OTU 3,976, G4WSX 3,624, G4SDZ 3,572, G3SYA 3,392, G3WBM/A 3,286.



John Bazley, G3HCT, visited Botswana during November and made many OSOs using a 101E and three-element Yagi beam as A25/G3HCT

G3URA 2,940, G4UWW 1,298, G3OCA 1,010, G3SIX 940, G3TEK 645, G3IRM 570, and G0AZR 380 points. In the multi-operator section, G3VZT scored 173,313, G3XEP 173,160 and G6OIA 24,780 points, and RS87156 scored 474 in the listener contest.

## Around the bands

G8KC perhaps expresses the frustration of most of us when he writes: "Just a line to keep the story alive—but there's very little to say". He continues: "The average of the daily 2,800MHz solar flux observations for 1985 was 75sfu as compared with 203 in 1981. In fact the monthly average first dropped below 80sfu in September 1984 and has subsequently fluctuated above and below 75, the overall trend being flat for 17 months and this flatness extending to the daily figures with only a single day during the period having a value above 100sfu. This behaviour provides few clues as to what happens next!"

There was an intense aurora during the weekend of 8-9 February and this was accompanied by much inter-European activity on 28MHz. At the same time G3KSH reports that 1.8MHz virtually closed down and that for several hours even inter-G contacts were difficult. The hf bands took several days to recover.

Many thanks to those who sent in logs this month. They included G2HKU, G3YY, G5LP, G3CSM, G3s GVV, IGW, KSH, G3NNF, G3s PJT, RZP, UKH, YRM, G4EHQ, G4WKR, G4s LRS, MUW, OBK, UOL, UYR, UZN, XAH, G0AQT, and RSs 10906 and 84869.

Calls listed in italics were of stations using AIA.

1.8MHz. 0000 KA1PE, W3YOZ, 0200 EA2JS, T77C, 0500 J3/K4LTA, T12CCC, YN1SI, YV2CB, 0600 EA6KZ, K5NA, OH0XX, T77C, ZB2EO, 093EP, 0700 CT3BZ, K5UR, VP2VA, W0EJ, 1700 OH0XX, 2000 UG6GAW, W2FJ, K3ND, 2300 RT5UYUJ, 4U1ITU.

3.5MHz. 0000 3V8PS, 5B4GA, YU3KI/5N0, 0100 K5s MA, ZD, 4X4NJ, 0200 CN2AO, J88AC, W1-5, 8, 9, 0300 OE5JTLTK, 0400 TA1E, 0700 PT7AO, TF5TP, ZL1TH, 0800 CE1HBI, VE3ICR/VP2, 1800 JW0A, LX1RO, 1900 TL8CK, VKs 2AVA, 7AE, 2000, EA9RM, HB0LL, T22XN, 4U1ITU, 2100 C56/G4IUF, JY9RL, 3A2GL, 2200 CT3/W2ZZ, TA1D, W1, 2, VE3, 3V8PS, 7P6ITF (?), 2300 C3IOF, HH7PV, J89RL, 5V7AS.

7MHz. 0000 3V8PS, 0100 WA4CTA/KP2, 0200 5V7AS, 0700 J37AH, ZL1BZ, 0800 JA, V13XB, ZL2NP, 9Y4GR, 0900 CE0HLK, HC2NMY, DL1UFT/12, VK5BC, 1000 K4EWD, 1400 ZC4JV, 1500 KAT, UH8EC, 1600 YB4OZ, 1700 JAS, 1800 OHOPA, VU2TTC, 1900 C56/G4IUF, 2100 P4IKO2M, PY6OD, ZC4EE, 2200 3V8PS, 2300 WA4CTA/KP2, PA0VDV/JP2, P21DV, VK6LK, YU3KI/5N0.

10MHz. 0700 ZM2AGY, 0800 JAS 11FP, 2H2T, SV5SW, VK2, VK3, ZL1BXZ, 0900 VK2, VK3, 9H3AK, 1000 FG5AM, W2GDV, W3TLV, 1100 VK5BJF, 1200 C30LBY, 1500 W2-W5, 1700 3A0GB, 4X4XB, 2000 C6ABA, FG5s AM, XC, SV0AH, 9H11F, 2100 W2, 4, 8, 9, VE3JPW.

14MHz. 0700 NY6M/KH2, T30AT, TA2J, 5V7AS, 0800 BY5RA, D44BC, FW8AF, HL1IDJ, JR2FOE/JD1, V6SCT, YJ8DL, ZL1HV, ZL2BKJ, 0900 AH2BE, BV2DA, FK8FL, HZ1TA, JAs, T26FS, V85GA, VK9NI, VP8BG0, VS6AU, ZLs, 3V8PS, 5Z4JK, 1000 JTOXC, JY9VO, VP8NX, VU2REC, 1100 AP2ZA, P29AR, VS6TO, Y11BGD, ZB2IH, 1200 VP5GT, 1300 PA0VDV/JP2, VK6RU, V85GA, 1400 J28EL, VQ9OM, 1500 JY5DL, K7NGM (Utah), RZ1OWA, OE7RKHY/K, 3B8FP, 1600 CY0SAB, J34HN, NL7G, VP2MW, VO9RB, W6-W7, XE2W, 5R8AL, 807CG, 1700 UA1OT, VK0DJ, 1800 A25/W6KG, S83H, S79CW, DL4HAD/ST2, TR8SA, VE3ICR/VP2M, W6OLZ2, 5H3CE, 5V7AS, 1900 C53EK, FY5YE, J34LTA, JW5E, VP8BG0, V47K, 6T2BA, 8P9AE, 2000 KC4AAC, VQ9OPM, 3B6BD, 2100 VP2EC, 2200 FM5BK, 2300 VP8ML.

21MHz. 0800 VK, 0900 VK, YC0FDW, 1000 WA7COE/DV2, EL2AJOD5, TA2G, VU2GRS, 1100 CT3/W2ZZ, EL2AY, S79CW, V85GA, 8HA, YC3DI, YU3KI/5N0, 9J2BO, 1200 A4XRS, D68AM, J28OS, OD5YU, VK9XJ, VE3ICR/VP2M, 9K25JF, 1300 3B8DB, 1400 K2LE/V4, VE3CPU/VP2M, 3D6BT, 1500 FG5CH, FM5CT, HC5KA, PA0VDV/JP2, Z2, ZS, 5N9GM, 1600 NP4P, NP4Z, PJ2HB, ZD7CW, 6T2MG, 1700 CE4BNC, CX, HH2MC, J3/K4LTA, LU, PY, ZP, 9Y4GR, 1900 VP8VK, 28MHz. 1100 Z4ZWF, 1600 9Y4s BA, CK, 1700 EA8AJ, 1800 UA1FZL.

The following are thanked for news items extracted: DXpress (PA0GAM), CQ Magazine (W1WY), DXNL (DL3RK), Long Island DX Bulletin (W21YX), DX News Sheet (G4DYO), the Ex-G Radio Club Bulletin (G13OEN/W6), Long Skip (VE3IPR), Lynx DX Group Bulletin (EA2JCO), and The DX Family News Letter (JH1KRC).

Please send all items for June issue to reach G3FKM by 24 April. □





5V7AS. As at 13 February, Brad had logged 131 Russian Oblasts this year. Robert Small, BRS8841, reported an interesting month, with 100 countries logged on 3.5MHz during January—the fifth to report that feat this year; the LF Challenge results will give a fuller picture of conditions. The 3.5MHz band had provided four new countries, 4U1UN, S90AS, VK9LM and P29JS, and 7MHz came up with 5R8AL and 7P8CI. On 14MHz DL1UF/T12 and BY1QH were the best on offer, while 5H3CE/A (Zanzibar Is), A25/W6KG and VY1CC/VP2M were the pick. On the QSL front, NA6T/KH4, XX9XX, HC8X and BV2DA were the best.

## HF Challenge results

The total number of logs for the 1985 HF Challenges which coincided with the CQ WW Contests produced 22 logs, a slight increase on 1984 and one fewer than in 1983. Conditions for the ssb leg were extremely good, with an A-index number of five for both days. The cw leg was not so fortunate, but the bands were in better than average shape. Jean-Jacques Yerganian, ONL383, remarkably kept up his winning sequence, but his ssb winning margin was considerably lower this time. It was somewhat disappointing that only two entries were received for the cw leg, although both entries showed much hard work on the part of the entrants.

Surprisingly, the number of countries heard on 28, 21 and 14MHz in the ssb leg were all up on 1984, while 7MHz was well down on the previous year, with 3.5 and 1.8MHz producing similar scores to 1984. On 28MHz, 43 dx countries were heard, including CE0Z, FR5, J28, TL8, VK9X, 3B8, 4S7 and 9U5. The 21MHz band boasted 137 countries, including 86 dx; the best were BY, HS, KH2, P29, 8Q7, 9N1 and 9X5. On 14MHz, 139 countries were heard, with 86 dx countries logged. Nothing too startling here, but BY, FK8, VK9X and 9M2 were the pick. Moving to the lower frequency bands, 7MHz produced only 89 countries compared to 113 in 1984; 42 dx countries were heard, and most excitement centred on HC8X, several KL7s, VR6JR and 3D6DX. Conditions on 3.5MHz were only average: BT1BK and HS0A were logged by several listeners, but exceptional dx was at a minimum, with little heard from the Far East; HC8X was also heard on this band, with J8, VP2E and ZF2 the pick of the Caribbean. The 1.8MHz band showed 14 dx countries, including PU7, VP2E, VP2V, VP9, YV, ZL2BT and ZL3GQ (giving a number of entrants their first ZL on the band), YV and K7NJ4X. A total of 170 DXCC countries was logged on all bands during the ssb event.

Turning to the cw leg, a true resumé of conditions is not possible with just two logs, but several factors came to light: ZS1CT and ZS3/W6QL were the only dx stations heard on 28MHz; 21MHz produced some good openings to the Far East and Africa, KH6XX, BY8AA and HS0A were active, and 14MHz dx included NH6J/KH0, CH1PJ/VE8, CY0SAB and DX1N. On the lower frequency bands Jean-Jacques found 77 countries, including 40 outside Europe on 7MHz. DX was audible throughout the day on 7MHz, with HL9CW 569 at 1332, NH6J/KH0 589 at 1356, BY4AA 569 at 1359 and KH6XX 569 at 1412. HS0A was 579 at 1501. These loggings certainly proved the high spots of both events. CY0SAB and VS6DO seemed about the best on offer on 3.5MHz, while 1.8MHz produced the now expected dx, of which FM5WD, VK6HD and UM8MM were the pick.

Both events seem to have had the desired effect of giving much enjoyment, a few new countries, a greater knowledge of band conditions, while improving contest operating technique. This is now a regular event, and I look forward to an increased entry to all sections of this year's challenges.

| Posn                                   | Station   | 28  |      | 21  |      | 14  |      | 7   |      | 3.5 |      | 1.8 |      | Total<br>points |
|--|-----------|-----|------|-----|------|-----|------|-----|------|-----|------|-----|------|-----------------|
|  |           | Pts | DXCC | Pts | DXCC | Pts | DXCC | Pts | DXCC | Pts | DXCC | Pts | DXCC |                 |
| SSB MULTI-BAND                         |           |     |      |     |      |     |      |     |      |     |      |     |      |                 |
| 1                                      | ONL383    | 108 | 50   | 254 | 116  | 183 | 91   | 259 | 74   | 160 | 56   | 143 | 35   | 472,491         |
| 2                                      | A. Miller | 83  | 45   | 204 | 92   | 194 | 94   | 233 | 70   | 165 | 57   | 146 | 37   | 404,875         |
| 3                                      | ONL5810   | 105 | 53   | 184 | 86   | 152 | 78   | 173 | 58   | 150 | 51   | 116 | 27   | 310,640         |
| 4                                      | BRS8841   | 80  | 38   | 173 | 79   | 137 | 67   | 213 | 63   | 137 | 49   | 140 | 35   | 291,280         |
| 5                                      | BRS32525  | 44  | 25   | 140 | 68   | 130 | 70   | 177 | 57   | 174 | 57   | 199 | 43   | 277,344         |
| 6                                      | BRS87259  | 8   | 8    | 87  | 49   | 113 | 61   | 73  | 29   | 109 | 38   | 71  | 19   | 94,044          |
| 7                                      | ONL6945   | 18  | 12   | 54  | 24   | 51  | 21   | 107 | 34   | 21  | 10   | 48  | 16   | 34,983          |
| 8                                      | BRS45205  | 0   | 0    | 59  | 33   | 68  | 42   | 29  | 13   | 32  | 16   | 15  | 5    | 22,127          |
| 9                                      | ONL2585   | 11  | 7    | 79  | 37   | 46  | 28   | 5   | 1    | 0   | 0    | 0   | 0    | 10,293          |
| 10                                     | BRS87894  | 0   | 0    | 15  | 7    | 54  | 34   | 41  | 19   | 13  | 5    | 6   | 2    | 8,643           |
| 11                                     | BRS31976  | 0   | 0    | 0   | 0    | 0   | 0    | 0   | 0    | 64  | 26   | 99  | 26   | 8,476           |
| 12                                     | ONL4333   | 0   | 0    | 60  | 32   | 37  | 23   | 0   | 0    | 0   | 0    | 0   | 0    | 5,335           |
| 13                                     | BRS87725  | 0   | 0    | 21  | 15   | 43  | 29   | 0   | 0    | 24  | 9    | 0   | 0    | 4,664           |
| SSB SINGLE-BAND                        |           |     |      |     |      |     |      |     |      |     |      |     |      |                 |
|  | BRS25429  | 0   | 0    | 0   | 0    | 0   | 0    | 0   | 0    | 0   | 0    | 212 | 45   | 9,540           |
|  | A. Miller | 0   | 0    | 0   | 0    | 0   | 0    | 233 | 70   | 0   | 0    | 0   | 0    | 16,310          |
|  | ONL3975   | 0   | 0    | 0   | 0    | 221 | 108  | 0   | 0    | 0   | 0    | 0   | 0    | 23,868          |
|  | BRS87259  | 0   | 0    | 0   | 0    | 113 | 61   | 0   | 0    | 0   | 0    | 0   | 0    | 6,893           |
|  | ONL2403   | 0   | 0    | 0   | 0    | 104 | 65   | 0   | 0    | 0   | 0    | 0   | 0    | 6,760           |
|  | BRS62088  | 0   | 0    | 0   | 0    | 94  | 58   | 0   | 0    | 0   | 0    | 0   | 0    | 5,452           |
|  | BRS52543  | 0   | 0    | 175 | 85   | 0   | 0    | 0   | 0    | 0   | 0    | 0   | 0    | 14,875          |
| Total countries heard during challenge |           | 79  |      | 137 |      | 139 |      | 90  |      | 79  |      | 52  |      |                 |

| Poin | Station | CW MULTI-BAND |      |     |      |     |      |     |      |     |      |     |      |         |  | Total<br>points |
|------|---------|---------------|------|-----|------|-----|------|-----|------|-----|------|-----|------|---------|--|-----------------|
|      |         | 28            |      | 21  |      | 14  |      | 7   |      | 3.5 |      | 1.8 |      |         |  |                 |
|      |         | Pts           | DXCC | Pts | DXCC | Pts | DXCC | Pts | DXCC | Pts | DXCC | Pts | DXCC |         |  |                 |
| 1    | ONL383  | 7             | 3    | 188 | 84   | 146 | 72   | 272 | 77   | 174 | 57   | 258 | 51   | 359,480 |  |                 |
| 2    | BRS8841 | 7             | 3    | 113 | 47   | 63  | 35   | 185 | 52   | 105 | 39   | 160 | 37   | 134,839 |  |                 |

## Newcomers

First-time welcomes go to Melvyn Dunn, RS86500, and K Lister, BRS88371. Melvyn has amassed QSLs from 70 countries. A reminder that RSCB HQ has copies of a nine-band DXCC countries list. BRS88371 has an FRG7000 receiver and has been listening for only six months.

## Finale

News, views and table scores for the hf table should reach me no later than Monday 14 April, with late copy by Tuesday 22 April.

# COMPUTING

John Morris, GM4ANB\*

## Radial ring scoring

Have you read the vhf/uhf contest rules in January's *Rad Com*? If you have gone through them carefully you may have noticed a slight change in the radial ring scoring. If, like most contestants, you use a computer for contest scoring you should make sure that the program obeys the amended rules.

Before this year the rule was that 0 to 50km scored one point, 50 to 100km three points, and so on. The rule now (No 9, page 1, "Operating Guide" supplement *Rad Com* January 1986) is that 0 to 50km scores one, 51 to 100km three, and so forth.

Look through your program and identify the part that converts from distance to radial ring score. Some commonly used expressions are:

```
1 + 2 * INT((DX-0.5)/50)
1 + 2 * INT(DX/50.001)
1 + 2 * INT(DX/50)
```

To set the correct scores, change the program to use an expression along these lines:

```
1 + 2 * INT(ABS(DX-1)/50)
```

where DX is the distance, in kilometres.

Subtracting one from the distance moves the three point boundary out to 51km, as the rules now state. The "ABS" ensures that distances of less than 1km have a positive score.

## Spherical direction finding

In February's issue I gave G3RUH's method for finding the points of intersection of two bearings using a vector cross product. Since that issue went to bed I have received a number of algorithms for solving the same problem using only standard spherical geometry formulas.

Judged on the basis of brevity and neatness—and getting the right answers—the best version came from G4WIZ. Honourable mentions also go to G4DXJ, G8EWX and G4HZA.

G4WIZ's method comes in the form of a subroutine (Program 1). On entry N1, E1, B1 should be the latitude north, longitude east, and bearing of the unknown position for station 1. N2, E2 and B2 are the corresponding values for station 2. On exit the two possible locations are given by N3, E3 and N4, E4. All angles are in radians. Add a main program to suit.

Several correspondents said that they enjoyed the challenge of a non-trivial programming puzzle over the Christmas hiatus, so I will try to find something equally taxing for this year. Any suggestions?

## Mixed locator conversions

Program 2 is a utility which will automatically convert either a QTH locator or a "Maidenhead" locator.

Once again the interest is in the subroutine, which can be plumbed into your own programs. Line 10 sets up the array and constants used in the conversion, and needs only be executed once per program run. The subroutine itself starts at line 1000. It takes a locator in Q\$ and returns the latitude and longitude in N and E. They are both in degrees, so remember to convert to radians if you are going to use them for distance calculation. Variable EF is the error flag, it is set to one if the given locator is illegal under both systems.

The type of locator is determined according to its length, in lines 1020 and 1110. The error checking sequence (lines 1070 to 1100) is common to both types, so saving a bit of typing. Separate bits of arithmetic for the two locator types then give the final conversion.

I have long been fascinated by programs which not only do data conversion, but also detect what sort of data has been entered, without

## Program 1

```
1000 SE = SIN(E2-E1): CE = COS(E2-E1)
1100 S1 = SIN(N1): C1 = COS(N1): S2 = SIN(N2): C2 = COS(N2)
1200 CP = S1*S2 + C1*C2*CE: X = C1*C2*SE
1300 Y = S2 - S1*CP: E3 = ATN(X/Y): IF Y<0 THEN E3 = E3+PI
1400 Y = S1 - S2*CP: E4 = ATN(X/Y): IF Y<0 THEN E4 = E4+PI
1500 EC = ATN(SE/(S1*S2)/SIN(E1)+SIN(E1-B2)/SIN(B4+B2)+CE)
1600 NC = ATN((S1+COS(EC)+COS(B1)+SIN(E3)/SIN(B1))/C1)
1700 E3 = E1 + E3: IF E3<-PI THEN E3 = E3 + 2*PI
1800 N4 = -N3: E4 = E3 + PI: IF E4>PI THEN E4 = E4-2*PI
1900 RETURN
```

\*6A Morlich Grove, Dalgely Bay, Near Dunfermline, Fife KY11 5UX.

## Program 2

```

10 DIM C(6):P$="1221000121":CI=ASC("I"):C0=ASC("O")
20 INPUT "Locator":C$:GOSUB 1000
30 IF C$ THEN PRINT "Illegal!":GOTO 20
40 PRINT "Lat ":N: " Long ":E:GOTO 20
1000 EF=1:OL=LEN(C$):IF OL<5 OR OL>6 THEN RETURN
1010 FOR J=1 TO OL: C(J)=ASC(MID$(C$,J,1)):NEXT
1020 IF OL=6 THEN L$="AA00AA":H$="RR99XX":GOTO 1070
1030 L$="AA00A":H$="ZZ79J":C(4)=C(4)-1
1040 IF C(4)<0 THEN C(4)=C(4)+10: C(3)=C(3)-1
1050 IF C(3)<0 THEN RETURN
1060 IF C(3)<0 THEN C(3)=C(3)+1
1070 FOR J=1 TO OL
1080 L=ASC(MID$(L$,J,1)):H=ASC(MID$(H$,J,1))
1090 IF C(J)<L OR C(J)>H THEN RETURN
1100 C(J)=C(J)-L: NEXT:EF=0
1110 IF OL=5 GOTO 1150
1120 E=C(1)*20 + C(3)*2 + C(5)/12 + 1/24 - 180
1130 N=C(2)+10 + C(4) + C(5)/24 + 1/48 - 90
1140 RETURN
1150 E=C(1)*2 + C(4)/5 + VAL(MID$(P$,C(5),1))/15 + 1/20
1160 N=C(2) - C(3)/8 + VAL(MID$(P$,C(5)+2,1))/24 + 43/48
1170 N=N*40: IF E/42 THEN E=E-52
1180 RETURN

```

having to be told. After all, a human can look at a grid reference and decide whether it is a locator, an ngr or whatever, so why shouldn't the computer?

Plugging in national grid references to Program 2 is relatively easy. If you would like to try it, the rule is that the first two characters are always letters, and the rest digits. The grid reference must then be converted to latitude and longitude, as shown in February's *Computing*.

## Program register

Have you written any amateur radio programs which you think deserve wider circulation? I certainly receive lots of listings through the post, but many of these, although quite excellent, are just too long to fit into this column.

To get those programs moving round the country I have established an experimental "Program Exchange Register". This is a centralized list of who has what, and how to get hold of copies.

The rules are as follows:

1. To add a program to the register send a brief description (preferably on a postcard) of it to me. Do not send tapes or listings!
2. The description should include:
  - (a) program function;
  - (b) the computer on which it runs, including any special hardware needed; and
  - (c) instructions on how to get a copy.
3. Programs can be distributed on tape, disc (specify size, format, density, number of sides etc), or electronically, at the choice of the author.
4. The submissions will be collated to produce a list of who has what. The list will be updated as new submissions are received, and copies will be available on receipt of an s.a.c.
5. To get a copy of a program the procedure will be as follows:
  - (a) Where an exchange of media (disc, tape) is necessary, the person requiring the program should send a blank tape or disc to the program's author, together with suitably addressed and stamped packaging for its return.
  - (b) In the case of an electronic exchange, follow the instructions given in the register.
6. All programs remain copyright of their original authors. In submitting a program to the register the author is assumed to be giving permission for its non-commercial use by individual radio amateurs.
7. Inclusion of a program on the register does not imply that it has been tried or tested by anyone other than the author.
8. The register is primarily intended to facilitate exchange of programs between amateurs. However, commercially distributed software may also be included, at the discretion of the registrar. Companies wishing their products to be listed should send the information described above, together with details of price etc.

The register is now open for submissions. If few entries are received by the beginning of June the project will be scrapped! If enough entries are received the first edition of the register will be available during the late summer; details will be given in August's *Computing*.

## Oddbits

The SARUG newsletter often contains novel programming ideas, and the January 1986 issue contains a program for an amateur radio computer application which I do not recall ever having seen before.

It works in conjunction with a vlf receiver, tuned to the 60kHz MSF time

signal transmitter at Rugby. It decodes, in software, the time signal, and displays it on the screen. Facilities for fine tuning the signal are also provided.

The program, by G4IDE, is written in Z80 machine code, and is specific to the Spectrum. It should be possible to adapt the method to other computers, but additional hardware interfacing will probably be needed.

Also from SARUG comes news of a couple of programs for the QL by GM4IHJ: "QL WOTSON", an hf propagation predictor, and "QL SATS", a 34 satellite predictor covering all present and some planned satellites. Each costs £3 plus a blank microdrive cartridge plus return postage. For details send an s.a.c. to G4INP, QTHR.

Another new product is a suite of software for the Spectrum to decode the Uosat-1 and Uosat-2 transmissions, without use of any special interfaces. Details from G4IDE, 79 South Parade, Boston, Lines PE21 7PN.

# SATELLITES

Bob Phillips, G4IQQ\*

THE LAST FEW months have been relatively quiet for amateur satellite operators but the remainder of the year holds considerable promise for the ever growing following. The successful launch of the Ariane rocket in mid-February after last year's disaster, has restored confidence in the vehicle. Similarly, the launch of the new Soviet space station at around the same time, gives hope of new launch opportunities for amateur payloads in the future.

## Uosat

Both satellites are continuing to behave very well in spite of an increasing number of problems associated with the command station, which is now five years old and in need of a major overhaul. New equipment and computer software will be installed over the coming months and this should lead to increased reliability, as well as operating flexibility for the command station.

## Oscar 10

It is too early yet to notice any significant change in availability of the satellite, but the latitude at which apogee occurs has now started its gradual movement back towards the northern hemisphere. The visibility chart Fig 1, shows that there are two periods during the month when the satellite will be in view for reasonable durations. On the 11th the satellite is visible for almost the entire orbit and reaches its maximum elevation of around 28 degrees at 18:10hr (MA245). Similar conditions exist for the following four days but with the elevation angle falling to 17 degrees on the 15th. The last three days of the month also provide extended access with elevation angles up to around 30 degrees.

## RS satellites

In spite of high expectations, the launch of RS9 and 10 had not taken place by the end of February. It was however being reported, at that time, that the first manned flight to the new space station was likely to take with it the Iskra 4 satellite. The middle of March was thought to be a possible date.


## Other news

Tests on the phase 3C satellite continue with thermal-vacuum testing due for the end of March at the Martin-Marietta facilities in Colorado. These tests are designed to simulate the full space environment and to show up any potential fault situations on the ground where corrective action is possible. Launch date is likely to be in September assuming no further unforeseen delays in the Ariane programme.

The agm of Amsat-UK will take place at London House (opposite the old RSOB headquarters) on Saturday 12 April starting at 1.30pm. After the formal business of the meeting is completed, it is planned to hold a question and answer session on matters relating to amateur satellite operation.

Another important event for the calendar is the first colloquium to be held in this country, dedicated to the subject of amateur satellites. Organized by Amsat-UK in conjunction with the University of Surrey, the event will be held on the weekend of 5/6 July 1986 at the university. Full details of the event are not available at the time of writing but more

\*Transvaal Cottage, New Barn Road, Swanley, Kent BR8 7PW.

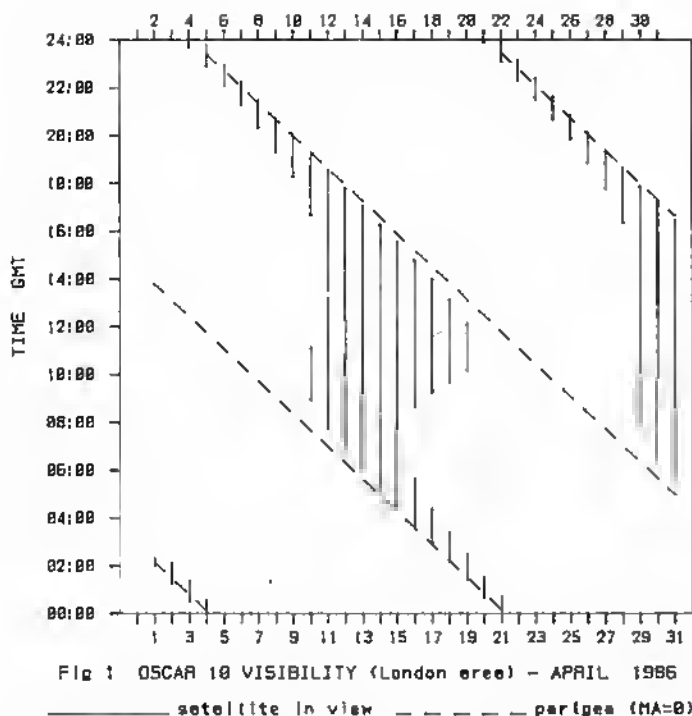

information may be obtained from Amsat's secretary, G3AAJ, at Amsat-UK, London E12 5EQ, with the usual sac.

Last year I referred to activity in the USA where stations with simple equipment were enabled to operate through Oscar 10 by means of gateway stations, which provided the necessary up-link and down-link to the satellite. Consideration to similar operations is being given in the UK by Dave Rowan, G4CUO, and John, G4ZHG. The aim would be to give vhf operators an insight into satellite operation without the need to obtain any new equipment nor to have any other knowledge of the subject. The project is called ASVAR (Amateur Satellite Via Amateur Radio) and is based on the use of a 145MHz fm link from the user to the satellite gateway station. The gateway would convert signals from fm to ssb for the up-link, and ssb to fm for the return. A number of outstanding issues have yet to be resolved but it will be interesting to see if other groups take up the idea. □

## MICROWAVES

Mike Dixon, G3PFR\*

### Operating news

As is often the case in the wintertime, there has been little operating news to report. The extremely dry and very cold (by UK standards) weather has neither been productive of "lifts" nor of operating other than a little "fireside" (fixed) activity. This weather should have been eminently suitable for operation on the higher bands such as 24 and 47GHz, for there are significant water/water vapour losses on both bands and, indeed, the current world record on 47GHz was facilitated by two Swiss amateurs (HB9MIN/P and HB9AMH/P) operating under the extremely dry conditions brought about by sub-zero temperatures in the Alps. The month of February has done its best to emulate these conditions, but I don't know whether anyone in the UK has taken advantage of this. Incidentally, the Swiss achievement has earned the two operators the Marconi Award, the third time in succession that the award has gone overseas! We, in the UK, should be looking to our laurels!

Frederick, G6FK, has reported continuing success on the regular skeds between G3KFD (Wolverhampton) and G6LEU (Nr TRURO) on both 1.3 and 2.3GHz, and that both are attempting skeds with G1DOX (Barrow-in-Furness). The latter skeds have not, so far, yielded results. Signals generally during January and February are reported to have been weak, although

signals between G6FK and G14CXH "are now showing results again, with signals out of the noise on at least two out of every five occasions, despite the varying weather conditions of the last two months". G14CXH is running tests with G6LEU and, as Frederick puts it, "sooner or later path conditions will support signal exchanges". Other bits of news are: G4JY (Kinver, Stourbridge) is converting his two-stage 2C39 pa to water cooling, while G4CBW is doing a similar exercise on his 2.3GHz pa: GW8AAP, formerly of Prestatyn, is now resident near Lincoln and is expected to be QRV from his new location before too long: GW3CCF (near Mold) is operative on 1.3GHz during the day and in the evenings, and is building for 2.3GHz: Russ is also operative on 10GHz (wb) from home (I worked him from a local high spot some time ago, with Russ' gear pointing out through a bedroom window!).

### Communications '86—on 5.7GHz?

There seems to be quite a large amount of ex-commercial equipment available, built in WG14 and centred on 6GHz. This should be very easily adaptable to 5.7GHz, and the items around on the amateur market include post-type filters, detectors/mixers, circulators, isolators, many varieties of WG14 "bits" and twts. Addresses for such items were published in the February issue of the *Microwave Newsletter*. A 5.7GHz version of 'JVL' mixer and 'DEK' multiplier was published in the *Newsletter* (October 1981 and elsewhere) and it is known that this design is capable of much more output than the corresponding 10GHz version; it is also less critical to align than its higher frequency counterpart. It is hoped that the availability of such "hardware" at amateur prices will encourage an upsurge of activity on 5.7GHz. Unfortunately beacons are not, at the moment, licensable on this band. As indicated last month, I will be pleased to report any activity, but especially that concerning the "middle" bands such as 3.4 and 5.7GHz where there seems to be little activity compared with 1.3 and 10GHz. The latter comprises most of the news received, although there are increasing signs of improving activity on both 2.3 and 24GHz.

### Recent awards

Jack, G5UM (microwave awards manager), has listed a number of awards made in January and is looking forward to issuing many more as seasonal activity increases in the spring.

| Callign | Award (No)      | Band   | Callign | Award (No)      | Band   |
|---------|-----------------|--------|---------|-----------------|--------|
| G8HPD   | Distance (98)   | 1.3GHz | G8HPD   | 15 Squares (31) | 1.3GHz |
| G8BGJ   | Distance (99)   | 1.3GHz | GW3CCF  | 25 Squares (20) | 1.3GHz |
| G4NBS   | 5 Squares (58)  | 1.3GHz | G6DER   | 30 Squares (7)  | 1.3GHz |
| G8BJG/P | 5 Squares (59)  | 1.3GHz | G3XOY   | 50 Squares (4)  | 1.3GHz |
| G8BGJ   | 5 Squares (60)  | 1.3GHz | G3XOY   | Distance (15)   | 2.3GHz |
| G6ETA   | 5 Squares (61)  | 1.3GHz | G8BJG/P | Distance (7)    | 10GHz  |
| G4NBS   | 10 Squares (50) | 1.3GHz |         |                 |        |

### From here and there

Ken, G8VR, my "opposite number" on vhf/uhf, sent a brief note indicating that he has moved to a new QTH in Kent, half a mile from the sea and with a sea take-off for about 250° of the compass. In this situation he is about to launch forth on 1.3GHz with, initially, an MM transverter, longish feeder, masthead preamp and solidstate pa. He said: "The ultimate aim is eme with a dish, but much to do and infinitely more to learn about this band before that is a reality . . . I reckon back-yard eme on 23 or 13cm is the future for us all. It certainly appeals to me!". My view is that Ken, with a clear sea take-off in many directions, will be very surprised by the results he will get! He sent along some details of antenna measurements on 1.3GHz made at the 1985 Dayton "Hamvention" in the USA. They are shown in the table below:

| Operator | Antenna                           | Measured gain (dBd) |
|----------|-----------------------------------|---------------------|
| W1JR     | 19.8λ 55-el F9FT                  | 18.45               |
| W1JR     | 15.8λ 45-el loop Yagi             | 17.8                |
| VE3BFM   | "Colagi"                          | 14.0                |
| NE8I     | 7.24λ 28-el modified "RSGB"       | 12.7                |
| VE3BFM   | 1.14λ 21-el "Colagi"              | 8.1                 |
| W8BOGS   | Dipole and 0.165 square reflector | 6.8                 |
| K0DAS    | 1.48λ 2x3lb coffee cans           | 5.7                 |

### Microwave Committee Business

Main concerns discussed at the January meeting of the committee were how to progress and stimulate narrowband activity on all bands, but especially (since the RSGB has a special responsibility for the band) at 10GHz. It was also agreed that encouragement should be given for more operators to become active on 24GHz, initially with simple wb gear and then possibly with phase-locked equipment. Means of achieving these ends were discussed, and will be published when ideas have been finalized.

It was noted that there are several inexpensive solidstate devices appearing on the market which are of potentially great interest to the microwave operator. G4DDK is exploring such devices, and some so far

\*"Woodstock", Gaze Bank, Norley, Warrington, Cheshire WA6 8LL.

examined include hybrid circuits for 1.3GHz (0.5W in for 20W out), 2.5GHz divide-by-four prescalers, wideband (up to about 2GHz) "modamps" for use, for instance, as prescaler preamplifiers, and some most interesting-looking phase-lock chips with output in the 1 to 1.5GHz region. Details of some of these devices have appeared in the *Newsletter*, and it is hoped to be able to give further details as investigation proceeds.

There was full and detailed discussion of the papers submitted by other national societies prior to the Vienna IARU conference of vhf/microwave managers. This is regarded as an important run-up to the main triennial conference in 1987.

## Components service

As mentioned last month, this service is in full operation and the majority of components are available "off the shelf" for immediate delivery. By the end of March it is hoped that the range of chip capacitors will have been extended and that there will be two values of chip resistor (51 and 100Ω) available. If the demands for chip resistors of other values is sufficient, then the range of values can be extended. Other "surface mount" components will be considered as more constructors turn to pcb designs at the lower-band frequencies. If successful and reproducible pcb designs for the higher bands start to appear, then special chip components capable of extended frequency performance will be needed. The committee would still like to hear from members what their needs are; even if it is not feasible or practicable to stock some types of components, we may be able to help by advising on likely sources. Readers are reminded that the main objective of the service is to supply parts which are not easily accessible from other commercial sources, or whose "small order" price is too high for the individual to deal with the supplier. □

# DATA COMMS

Ian Wade, G3NRW\*

THE FIFTH EDITION of BARTG's *RTTY The Easy Way* booklet is now available. It is 50 per cent larger than before, with new material on the 444 teleprinter and the Airtor Mk 2 controller, plus, for the first time, a section on rty software for computers. There is also full constructional information on the ST5 terminal unit and supporting control logic. More details from Peter Adams, G6LZB, 464 Whippendell Road, Watford, Herts WD1 7PT.

Neill Taylor, G4HLX, recently sent me details of his "SUDD" program, which decodes Uosat 1200 bps ascii data with a ZX Spectrum, requiring only a simple 145MHz receiver and no special interface hardware. Telemetry frames are fully decoded, and the data may be saved on tape or microdrive. One can also monitor messages being sent in the digital communications experiment on Uosat 2/Oscar 11.

It seems that AX.25 packet is gaining a hold in the southwest of England. Geoff Watts, G8BCH, is now chairman of the newly-formed "South West AX.25 Group" (SWAX25), with aims to promote packet and to support the installation of digipeaters. Details from G8BCH, G3VPF or G8IMB. At the opposite end of the country, the Norwich AX.25 group, comprising G8QR, G0DEE, G3LDI and G3PMQ, are all very active on 3.5, 14 and 144MHz. G3LDI has a 14MHz monobander atop a 100ft tower, and must be one of the first people to WAC on packet. The group holds a packet net at 1130 on Sunday mornings on 3.6MHz ± QRM, and all AX.25 stations are welcome to join in. The number of AX.25 users throughout the UK in general is growing rapidly, and I maintain a list, updated monthly, of the callsigns, names, locations and tncs used by all known active stations. Drop me an sae for a copy.

Nils Tolleshaug, LA5DI, says that the LA Packet Radio Group (LAPRG) was formed in August last year, and one of their first tasks was to order 20 TNC-2 terminal node controllers, which are now in operation. A digipeater, LA5PR, is operational in Skien, with a link to SK4NI in Karlstad, Sweden. They are now planning digipeaters in Oslo and Kongsvinger to establish a full link on 145-225MHz. For local QSOs they use 144.650 and 144.675MHz. LA6OCA, LA4LN and LA1K (the club station at the Technical University of Trondheim) are active on 14MHz.

Ger Rys, PA0RYS, reports that the Dutch Amateur Packet Group (DAPRG) now has about 30 active members, mostly in the west of Holland, with virtually all local traffic on 432.675MHz ("2m is like a swimming

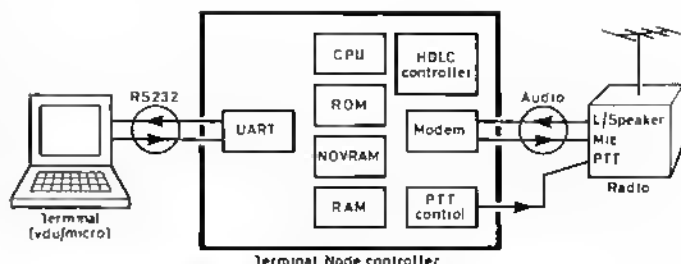


Fig 1. An AX.25 packet radio station, using a terminal node controller

pool!" says Ger). PE0MAR in the Hook of Holland regularly beams to the UK, and is particularly interested in setting up a link across the water.

Colin Richards, 9M2CR, is now active on packet from Malaysia. Using a TNC-2, he has had QSOs on 14MHz with JA5TX, YB1BG, YB0AQT, VK2BVS, JA3AUQ and JH1QDB. These last two stations have also successfully connected via 9M2CR; not bad for a 12,000km round trip in poor sunspot conditions. To check the frequencies of the tnc tones, Colin says that in the absence of a signal generator or frequency counter, the following method works: take a violin, preferably one owned since the age of seven, tune it to "A" (440Hz) using a pitch pipe as reference, then hit high "C" on the "E" string (2,100Hz). Finally, tune the tnc tone generator for zero beat! Now that's what I call the spirit of amateur radio!

Lastly, if you would like to see packet in action, yours truly will be giving live demonstrations of AX.25 on 5/6 April at the RSGB National Convention in Birmingham. Unlike last year's presentations, the emphasis this time will be more on the practicalities of setting up and running a packet station, rather than on the theory. See you there?

## Setting up an AX.25 packet station

Referring back to the packet primers in the last two issues, it will be clear that a lot of things happen when packet frames are sent and received (such as flag and frame check sequence processing, call sign checking, digipeater control, bit stuffing to prevent unwanted flags, plus a multitude of other tasks to do with error detection and recovery). All of this must be done in real-time, and while it is possible to do it by software in a single micro, the more usual approach is to use a terminal node controller (tnc), which sits between the micro and the radio (Fig 1). This way, the micro is not burdened with cpu-hungry bit processing, and has only to handle small amounts of data at its leisure. This leaves the micro free to run much more interesting software, such as a disc operating system, bulletin board, printer and so on, without overloading.

Table 1 lists most of the tncs available today—the numbers in square brackets refer to the suppliers, with addresses in Table 2. (Also listed is a software-only system to run on a Z80-based TRS-80 [9]; the only special hardware required here is a modem). The tncs which first set the world on fire were the TNC-1 and TNC-2, both designed by the Tucson Amateur Packet Radio (TAPR) group in the USA. Several of the other tncs listed in Table 1 are clones of these very successful designs.

In the TNC-1 (Fig 1), the cpu is a 6809, and the tnc code is contained in 32k of eeprom. The novram (non-volatile ram) is a kind of eeprom, and is used to contain semi-permanent data, such as the user's call sign, frame size parameters and various software timer constants. This data remains in the novram even when the power is off, and is immediately available when the tnc is switched on again. Communication with the terminal, which may be anything from a dumb vdu to a fully fledged micro, is in ascii via the uart. The HDLC (high-level data link controller) chip does the hard work of assembling and disassembling packet frames, automatically handling flag

Table 1. AX.25 terminal node controller kits and assembled units

| TNC             | Supplier | Terminal/micro       | Power  | TNC CPU | Remarks   | Approx price<br>a=assembled,<br>k=kit, d=disk |
|-----------------|----------|----------------------|--------|---------|---|---|
| HQ-4040         | [4]      | Ascii                | AC     | 6809    | TNC-1 clone                                     | \$249 (k)                                     |
| Communicator    | [6]      | Ascii                | 12V dc | 6803    | Many features                                   | \$219 (a)                                     |
| MFJ-1270        | [7]      | Ascii                | 12V dc | 280     | TNC-2 clone                                     | ? (a)   |
| PK1-1           | [1, 5]   | Ascii                | 12V dc | 6809    | TNC-1 clone                                     | \$499 (a)                                     |
| PK-1            | [3, 10]  | Ascii, baudot        | 12V dc | 280     |   | \$165 (a)                                     |
| PK-1L           | [3]      | Ascii, baudot        | 12V dc | 280     |   | \$210 (a)                                     |
| PK-64 (Pakiall) | [1, 5]   | Commodore C-64/C-128 | 12V dc | ?       | Needs only 25mA Also cw, ascii, baudot and ambr | \$219 (a)                                     |
| PK-80           | [1, 5]   | Ascii                | 12V dc | 280     | TNC-2 clone                                     | \$219 (a)                                     |
| Richcraft       | [9]      | TRS-80               | —      | —       | Software system                                 | \$29 (d)                                      |
| TNC-1           | —        | Ascii                | AC     | 6809    | No longer made                                  | \$240 (k)                                     |
| TNC-2           | —        | Ascii                | 12V dc | 280     | No longer made                                  | \$185 (k)                                     |
| TNC-208         | [8]      | Ascii                | 12V dc | 280     | TNC-2 clone                                     | \$154 (k)                                     |
| TNC-2A          | [3]      | Ascii                | 12V dc | 280     | TNC-2 clone                                     | \$155 (k)                                     |

\*7 Danbeney Close, Harlington, Dunstable, Bedfordshire LU5 6NF.

**Table 2. AX.25 terminal node controller suppliers**

- [1] AEA, PO Box C-2160, Lynnwood, WA 98036, USA.
- [2] Applied Digital Technology, 2056 E Suller Place, Oxnard, CA 93033, USA.
- [3] GLB Electronics, 151 Commerce Parkway, Buffalo, NY 14224, USA.
- [4] Heath Company, Benton Harbour, MI 49022, USA.
- [5] ICS Electronics Ltd, PO Box 2, Arundel, West Sussex BN18 0NX, England.
- [6] Kantronics, 1202 East 23rd Street, Lawrence, KS 66046, USA.
- [7] MFJ Enterprises, PO Box 494, Mississippi State, MS 39762, USA.
- [8] PacComm, 4040 W Kennedy Blvd, Suite 620, Tampa, FL 33609, USA.
- [9] Richcraft Engineering, 1 Wahneda Ind Park, Chautauque, NY 14722, USA.
- [10] Vomek, 11 The Dett, Stevenage, Herts SG1 1PH, England.

**Table 3. On-air AX.25 packet conventions**

| Bands | Mode | Tones (NRZI)  | Speed    | Popular frequencies |
|-------|------|---------------|----------|---------------------|
| VHF   | F2D  | 1,200/2,200Hz | 1,200bps | 144-675MHz          |
| HF    | F1D  | 200Hz shift   | 300bps   | 14-103, 3-598kHz    |

insertion and detection, bit stuffing and fcs computation. The modem can be set up to handle a wide range of tones, and Table 3 shows the tones in common use today, plus the corresponding speeds and on-air frequencies.

Communication between the tnc and the radio is at audio levels, using the microphone input and loudspeaker/headphone output of the radio, plus a ptt line. As mentioned last month, virtually any radio can be used. Transmit/receive changeover time is not at all critical (unlike Amtror), so it does not matter, for example, if you are using an old fm black box with a synthesizer lock-up time as long as 100ms when switching between transmit and receive—you simply set the tnc timer constants accordingly.

The other tncs shown in Table 1 perform essentially the same functions as the TNC-1, the differences between them being in the ratio of hardware to software (generally speaking, the cheaper ones do more by software) and in ease of use—some tncs are very friendly and well documented, whereas others are less flexible and somewhat light on the paperwork. As usual, probably the best advice before you part with your money is to contact the suppliers for detailed information, and then to talk to people already using the equipment you have your eye on. Current estimates put the number of tncs worldwide at around 10,000—most of these are in the USA, with probably about 1,000 in Europe (mostly in West Germany). □

## VHF/UHF

### Ken Willis, G8VR\*

BY ITS SHEER SIZE and intensity, the big February aurora, coming so soon after the release of 50MHz facilities, will surely take its place in vhf/uhf history. At this low-point of the solar cycle, any aurora which penetrates to the south is welcome; this one went right down to the Mediterranean, embracing almost the entire northern hemisphere at one time or another. So many reports have been received that it is not possible to detail them all, but everything received will go to the Propagation Studies Committee so that a final analysis of this incredible event can be made.

On 4 February, G4ASR (Hereford) observed a significant increase in sun-noise on 144MHz. Next day, John Nelson, G4FRX, was informed that some 23dB of sun-noise was being recorded on 50MHz, and G4ASR was receiving it at S9 on this band. What followed some 48h later was a proton event, described by Joe Reisert, W1JR (Mass), as "one of the greatest auroras ever" in which USA auroral records were broken on all relevant bands. Steve, W2CAP/1 (Cape Cod), said that the highest K and A indices anyone could remember were recorded (Merdon reached 196, Frederick-sburg, USA, 208). Others have compared it with the really big auroras of 1982, though some believe that nothing like it has occurred since the 'sixties. The event favoured mid-latitudes, with the north missing out, indicating that the activity was situated further south than normal.

The first auroral signals to be heard in the UK appeared on the afternoon of 7 February. Rod, G0CBO (Margate), was listening on 28MHz at around 3.30pm when the band went wide open for about 10min and he worked Mauritius and Ecuador by what appeared to be auroral-E propagation. Some auroral signals were also heard on the band, and 144MHz was found to be supporting auroral propagation. There was further activity in the evening following the afternoon phase, but the really big event took place on the next afternoon, 8 February, with its own second phase in the late evening lasting until the early hours of Sunday 9 February. Contacts were made on 50, 144 and 432MHz (both cw and ssb), and in particular the 50MHz band showed how useful it is when aurora is present. W1JR believes

that some operators even tried to make contact on 1,296MHz via aurora, and he requires further information if this was so. Joe says that many uhf operators are not used to doppler shift, which might have reached 10kHz one-way on 1,296MHz in this event (it was as high as 4kHz on 432MHz). Most rigs will not cover these sort of shifts, so trying to find a caller after a CQ call would be difficult if a wider search was not felt to be necessary.

It will be best to deal with each band separately in an attempt to summarize the mass of information which has come in.

#### 432MHz

Auroral contacts on this band are not all that common, but Mark Osborne, G4XOL (Merseyside), had no less than 44 cw contacts with DL, PA, F, G, Y24, OZ, SM and ON, all during the afternoon of 8 February. He had further contacts in the second phase but found activity much lower. QTF for most of his contacts was between 40° and 65°, while the use of 10° of elevation helped considerably. Notling was heard from LA or GM, and only one G (G3LTF) was worked. Mark used 100W to 4 × 21-element Yagis and an MGF 1404 GaAsfet preamp.

Mark's friend John Lovell, G8JHL (Salford), used only ssb on this band, and had nine contacts with D, PA and G, all on a QTF of 55°. He is another who commented on the problems caused by high doppler, plus the fact that his rig covers only 2kHz, so W1JR has a point! John Mills, G6LWT (East Sussex), was one of the stations worked by G8JHL, and he too was surprised at the extent of the doppler shift. G6LWT was using only 40W to 4 × 21-element Tonnas, while G8JHL has a K2R1W amplifier into 4 × 19-element Tonnas and a masthead NE72089. It seems a big antenna is one clue to 432MHz auroral contacts.

On the other side of the Atlantic, W3IY/4 worked W7CNK/5 at a distance of 1,134 miles, while W3IP had a contact with WB5LUA at 1,181 miles. The previous USA auroral record was 957 miles. As far south as the state of Georgia, W4GJO is reported to have had many 2 × ssb 432MHz contacts via Au.

#### 144MHz

As would be expected, this band carried most of the traffic during the event, and activity was at a high level during the Saturday, both on cw and sideband. G4ASR worked 18 countries, the best dx being UP2BFR at 1,805km. Ninety-nine contacts were made overall, and twice he was called by a 3A2 station but the contact was not made. This indicates how far south the event extended. Dave commented on the power of cw in an aurora, saying that many Class B operators could be heard working Scottish stations, whereas the real dx was on cw down at the bottom end. Philip Murphy, G14OMK, worked 16 countries in 52 squares with "most UK squares being available"; his bag included two OEs and SP3MFI (JL). He was hampered by the "insurmountable wall of G and GM stations" calling him—he says they can work him almost any time if they would only beam that way, and during an event such as this he naturally wants to work the longer distances like everyone else. He finds European stations behave admirably by contrast and wait for him to call country by country. How nice to be wanted; try living in southeast England! John Palfrey, G4XEN (Northants), managed 13 countries using cw, but the day was made perfect for him by a first-ever QSO with OH (OH5LK-KP3O) at 1,927km. He also worked several Russians, and later went on to 432MHz to work a further five countries, G, PA, D, G1 and SM.

In all, the full list of participating countries mentioned in 144MHz logs is G, GM, GW, GI, GD, GJ, EI, ON, PA, F, D, Y, OE, OK, SP, LA, SM, UP2, UQ2, HG, YU, OZ and OH, 23 in all.

In the USA, KA1ZE (Conn) worked WB0DRL (Kansas) at a distance of 1,348 miles, believed to be the new record, though Europeans have been claiming distances around this figure for some years (previous USA distance was 1,232 miles).

#### 50MHz

Many operators who had come on to this band only a few days earlier, found themselves in the thick of an aurora which provided unexpected opportunities for working dx. For the old-timers on the band, it was to show that there is still much to be learnt about propagation at this frequency.

Roger, G3XBM (Cambridge) had his homebrew rig on the air, giving him just 1W to a dipole 25ft high. He worked G3PFM in Dorset. David, G4RQ1 (Weymouth), thought his neighbour G3PFM was being optimistic when heard calling CQA, but changed his mind a couple of hours later with GM, G1, EI and 10 new squares under his belt, using about 10W from a Mutek transverter into a four-element Jaybeam. Further north, GM3DOD (Greenock) heard GB3SIX for "the first time ever" and worked 61 stations on cw, including LA9DL, LA9T, LA3TQ and LA1K; LA3TQ was thought to be auroral-E, since T9 reports were exchanged. GW3LDH, anything but a beginner on this band, also got among the LAs and commented on the T9 signal of LA9TQ (beam heading 290°).

\*6 Lerryn Gardens, Broadstairs, Kent CT10 3BH.



Meanwhile the 50MHz specialists were looking for things more exotic. Both G4GLT and G4BPY were looking on 28MHz for indications of auroral-E, and SM6PU was doing likewise. Late on Saturday evening, Dave copied LA5TEN with pure T9 note and got perfect pictures from Scandinavian tv on 48.25MHz. On 7 February, G4BPY had good copy from South America and the Caribbean on 28MHz when conditions were "phenomenal". Martyn, G3UKV, had a good aurora with 65 contacts with 23 squares which did much to counter his disappointment at not getting an earlier 50MHz permit.

However, the exciting news came from the USA where there was much activity, especially from the east-coast "gang" ever on the look out for UK signals. G4GLT reminded me of what I said in this feature in July 1985; it was "W2CAP/1 has asked me to request 50MHz operators in this country to keep a particular look-out for auroral-E in that part of the spectrum . . . typically an aurora starting in mid-afternoon followed by a second phase between 1030pm and 0030am (local time) will often produce auroral-E signals in this second phase or near its termination". As if to confirm this, USA stations heard beacon GB3SIX, and one W1 station copied "G3Z???" but could not confirm the call. SM6PU heard Lefty, K1TOL, but could not raise him crossband on 28MHz. This is a most important piece of information. It occurred on 9 February at 0050gmt on 50.110MHz. Olaf also heard 85 different UK stations during the event.

Thanks are due to G5KW and G3TCT and others for detailed reports. Joe Reiser, W1JR, wants any information on long hauls on any band during this and any other such event, since he wants to update the record statistics. An exciting time, an exciting band. It should provide much of interest in the future.

## Expedition time

Summer must be getting closer, because the first expedition information of the year has arrived. The Isle of Anglesey, XN square (IO73), will be activated between 27 May and 4 June using callsign GB4XN. Bands will be 70, 144, 432MHz and 1.3GHz plus wideband fm on 10GHz and 24GHz. Operation on 50MHz and 2.3GHz is under consideration. Skeds are welcome on 70MHz and 1.3GHz (contact Dave, G4VIX, QTHR, phone 04024 55870, and for 144MHz (contact Ian G4YUZ, QTHR, phone 0992 463478). The period embraces the 1.3GHz and 432MHz trophy contests (31 May-1 June). All other information from John G4ZTR, QTHR.

DL9GS, PO Box 102201, D-4630, Bochum 1, wishes to plan a meteor scatter expedition, and would like information on those squares likely to prove of greatest interest. Drop him a line if you have any views.

## Multi-hop sporadic-E

As part of the discussion on whether a 144MHz contact between the USA or Canada and the UK might be possible through multi-hop Es, the question has been asked about coast-to-coast contacts on this band in the USA by this mode. In February G4BWP drew attention to some information in Joe Reiser's columns in *Ham Radio* which suggested that such paths had never been experienced. Now fresh evidence has come from Ray Soifer, W2RS (ex G5DDU), of Glen Rock, New Jersey, a long-time reader of this feature under its various contributors. Ray writes: "It would appear that there has never been a documented case of coast-to-coast 144MHz propagation in North America except by cme. The North American Es record for that band is 3,322km between VE1SPI on St Paul Island in the Canadian Maritimes and K0UDZ, Rapid City, S Dakota on 12 July 1982. The most westerly station ever worked on 144MHz from the east coast was K0WLU/7, Gillette, Wyoming, who made two-way contacts with 34 stations in the NE USA and Canada via Es that same evening at distances up to about 2,750km.

"The propagation mechanism which enabled these contacts almost certainly involved two E-layer reflection points, since the distances covered were too great for a single-hop, and no tropo conditions were evident at the time. What is less clear is whether an intermediate ground reflection was involved (ie double-hop), or whether some sort of chordal propagation existed. My own observations at the time favour the double-hop thesis, since K0WLU/7 and I were each hearing stations in Michigan, roughly equidistant from us. K0WLU later mentioned over the telephone that another opening enabled him to work the Pacific coast after the path had closed between us. Too bad that both openings did not exist simultaneously".

Many thanks to Ray for a fascinating description of these events and the scholarly way in which he presents the facts. There seems to be a good case for pointing those beams towards the USA and Canada during the Es "season" instead of keeping them aimed at countries to the east, especially after an Es event has died down here. What would be best, however—

and this is what G4GLT would like to see done on an organized basis—is for some proper tests to be carried out with many stations on both sides of the Atlantic "on watch" at times when Es was most likely. Who will undertake to organize this and perhaps be the "first across" to make some vhf history? Bryn, G4DEZ, reminded me recently of some tests in which, I recall, G4DGU and G3SEK also took part, when some identifiable parts of calls were heard across the pond from a westerly vantage point in the UK, and this is not the first time that snatches of signal have been detected on this long path.

## Beacon notes

SM6AFH/SM6EOC report that the Icelandic beacon TF8VHF is now operational on a frequency of 144.930MHz with message format Callsign-Callsign-24s dash-Callsign QTH HP84PA-24s dash. Output is 40W to a six-element Yagi beaming 100° from due north. In the recent big aurora, OY9JD heard it for several hours, and LA6HL can copy it via ms. If anyone hears it and wants to try a direct QSO with Iceland, telephone Martin, TF3XUU, on 354-2-7040 and he will then come up on 144.025 or 144.050MHz, crystal-controlled, using 160W. This applies to hearing it via tropo, Es or aurora, not ms.

UA1ZCL (RC08c) has set up a beacon on 144.390MHz running 200W directed to the south, and it gives excellent ms bursts receivable in southern Sweden according to SM6EOC.

Writing from West Berlin, Friedhelm Lichtenthaler, DL7AJA, reports reception of all three UK 50MHz beacons in location GM47b. On 14 December between 1408 and 1421gmt, he copied GB3NHQ, GB3SIX and GB3RMK at strengths between S3 and S9. GB3NHQ was heard for a longer period, but in the noise. All this was accomplished on an FT690 transceiver with built-in quarter-wave antenna, and, as Friedhelm says, "all indoors".

The USSR magazine *Radio* has published a list of 27 active beacons in the Soviet Union, 22 of them on the 144MHz band and the rest on 432MHz. The 144MHz beacons are all on frequencies between 144.034 and 144.468MHz, with the bulk of them between 144.150 and 144.370MHz, in other words right in the thick of things as far as we in the UK and most of Europe are concerned. On 432MHz the beacons lie between 432.153 and 432.750MHz.

In the recent big auroral event all the UK 50MHz beacons showed up well, although G3XGY commented that "it is perhaps unfortunate that beacons occupy 12 per cent of the whole of the UK (50MHz) band, and 60 per cent of the ew section". In the same event, G4BPY found GB3SIX a better auroral signal than GB3RMK, which surprised him, while GM3DOD heard the west-country beacon for the first time. In Northampton, G4XEN also heard GB3SIX very well, but nothing from GB3RMK; while Martyn, G3UKV (Telford), said that, for him, RMK was not a good auroral indicator, since it went auroral long after other stations and disappeared when signals from LA became audible later.

W1JR reports that several W1 stations on the USA east coast copied GB3SIX during the big aurora. Other 50MHz beacons copied included FY7THF and one in HC2. Joe did not say if the latter were with Au tone or whether some other propagation mechanism was involved. They are very far south.

## Meteor master-class

Fortunately there was one good thing to emerge from my confusing the Halley's Comet story (*VHF/UHF* March). It got the astronomers among our readers interested, and now, it seems, we may have one or two of them hooked, so in future we may get from them a somewhat different slant on what goes on out there in the depths of space.

In response to my question in recent issues "How can a meteor reflection be strong yet short?", Alastair McBeath, Northumberland, comments that astronomers, concerned mainly with visual observations, notice that some meteors leave a "persistent glowing wake or train". He estimates that about 10 per cent of sporadic meteors entering the atmosphere exhibit trains. Showers may be "richer or poorer" than this. For example, the Perseids shower is considered a "rich" one with 30 per cent of its meteors being observed in trains, on average.

In determining whether a meteor is trained or not, two factors are important—size and speed. The faster or brighter the meteor, the greater the chance of it being trained. "Brighter" means larger in this context, which tends to mean that only fast-moving bright meteors will exhibit trains. Alastair assumes that meteor reflection of radio waves occurs only from trains, not from discrete meteors, but since "radio meteors" are often much fainter than those visible to the naked eye, it is reasonable to assume that many meteors produce trains which are not observed visually, or at least not by the naked eye.

Referring to the Geminids, Alastair says that observations indicate that



very few meteors in this shower leave trains, despite the fact that they appear very bright; those that do, produce quite short-lived trains. From his own observations in recent years of over 400 shower-meteors, only about six per cent have shown trains, and even the very brightest have rarely shown trains lasting for more than 0.5s. In fact 0.25s is much more common. To sum up, Alastair suggests that short strong reflections are characteristic of bright meteors producing short-lived trains—in other words, typical Geminids meteors. So now we know what to expect from this shower. It may pay to push up the cw speed in order to get the maximum information from those short, strong reflections.

Other interesting information from Alastair is that average Geminid meteor velocity is 34km/s, and to compare this with other showers may give clues as to the radio characteristics of different showers. Perseids average velocity is about 59km/s, Orionids 66, Leonids (regarded as having the best trains of any shower as well as the fastest speed) 71, Quadrantids about 42. This means that on the basis of velocity alone, the Quadrantids should produce similar reflections to the Geminids, possibly better. If one considers other factors such as brightness and numbers of meteors, one would expect more reflections overall for the Quadrantids (Quadrantids peak rate being about 1.5 times that of Geminids) but they would be less intense (Quadrantids roughly half a magnitude fainter than Geminids on average), but probably of longer duration.

Commenting on published results for the 1985 Geminids, Alastair says that peak rates appeared higher than normal. In past years the shower has produced about six times the level of sporadic "background" meteors, whereas 1985 rates were about eight times background level. It is also suggested that there was a double peak, with highest visual rates either side of 0000 and 0200gmt, although so far this has not been confirmed. It does, however, suggest that the time of maximum was later than predicted (2000gmt) since the first peak probably occurred at 2330gmt.

Initial results for the Quadrantids in January 1986 show a maximum several hours earlier than predicted (supposed to be 2300gmt, was possibly as early as 1900gmt). Peak rates were about 90/h.

### From the postbag

Frank, VE3DQB, who is editor of the Canadian amateur radio magazine, feels that he must raise a point associated with locators, and says that he has always "been dubious about schemes based on latitude and longitude". He observes: "If you have to work them out in the first place, why not use them?". According to Frank, the matter was put in focus by my comments in the December 4-2-70 when I said: "The Americans wanted a system based on 1° by 1° squares". Frank says there is one already, since 75N 150W has only one character more than a Maidenhead locator, but is five times more accurate! Unfortunately (or fortunately according to your tastes) we all know that the real foundation for any locator system these days, whatever the original aims, is the "squares game", so one form or another is bound to survive while operators strive to increase their scores. This is not at all a bad thing, since it maintains interest in vhf/uhf and causes people to optimize their equipment and sharpen up their operating techniques, both being good for our hobby generally.

John Gray, GW6ZUS (of Morriston, Swansea), makes a plea for more simplex fm operation. He says: "Where is everybody—are they licensed listeners, or all working fixed stations through repeaters?" John's location is badly screened between northeast and southwest (the "long way round") yet recently he made contact with G1PKV in Derby (125 miles) using a Slim Jim fed by an FT290R. After the contact, both stations invited others in their area to come in and work the stations on channel, but they were met with a deathly silence. John comments: "There are still fm-only stations looking for contacts on 144MHz". I must say that my own experience in listening to repeaters within my range indicates that they are certainly used a great deal by fixed stations. I am somewhat "renegade" in this respect, since although I accept that repeaters were originally conceived for mobile and handheld operation and the like, there was one period in my life when, living abroad in a flat, my only contact with the radio world was through the local repeater, and much enjoyment was obtained from this. So I have a warm regard for those who cannot aspire to outside antennas and who therefore see their local repeater as a gateway to some radio contacts. If they don't tie up the machine indefinitely, and use proper operating procedures, surely this cannot be a bad thing?

Guy Gervais, F6CJG (Brive), reminds me that the second leg of the 1986 REF moonbounce contest takes place on 19-20 April between 0000 and 2400gmt (that is, for the full 24h). Bands used will be 144, 432, 1,296 and 2,300MHz. If you can get a shot at the moon (on moonrise or moonset if you have no elevation control) you may hear some signals at the cw ends of those bands during this weekend, but please don't start calling those big USA signals unless you are fully equipped for eme, which you certainly won't be if you are conforming with current licence terms.

If it didn't become obvious in the big aurora, you may like to know that 20 Eire stations have received permission to operate in the 50MHz band. The Irish licensing authority is said not to favour a general allocation on this band (the 20 issued are to Class A licensees), and the permits have been granted on non-interference basis in accordance with ITU Regulation 342, and the duration of current permits is 12 months.

Back in January, mention was made of the fact that Paul, G4SXU (Harrogate), worked two EA9s on 144MHz during the big tropo opening the previous October. Paul has written to say that he encountered the two North African stations having a chat, and they thought it was a gag when G4SXU called in, but they then became so excited that their command of English suffered! You'll be thinking that Paul was flattening out everyone around him with that great signal, carrying to EA9. I am pleased to say that he was using just 10W from an unmodified 1C-251E into a Jaybeam eight-element crossed-Yagi antenna, with 150f of feeder (not heliax), so with feeder loss, about 3.5W to the antenna. In the same event he worked 33 new squares, but as if this were not enough, on 432MHz he worked an LZ in LC square plus enough squares to claim an RSGB award for the band. He heard OY9, 100, at S9 but could not get through the pile-up. Mind you, he uses a bit more power on 432MHz, a full 25W into 4 × 20 elements, plus some heliax feeder. You will do wonders for your tv if you try to emulate Paul. I have always advocated increasing erp by bigger antennas rather than a big linear if you can manage it. On 432MHz the antenna size makes this well worth considering.

The German vhf manager, DJ1XK, has resigned and his successor is Karl Weiner, DJ9HO. It is believed that the resignation was due, at least in part, to decisions reported in last month's *VHF/UHF* which would increase fm channels on 144MHz by putting beacons at the lower end of the band.

Guy Gervais, F6CJG, who is the French vhf manager, was scheduled to propose to the vhf managers meeting in Vienna in March the adoption of the "Polish" (SP6XA) scheme for locators. In this version locator BF21J in "European" format which is JN15AQ in "Maidenhead", would become BFAJ in "Polish". The system would be used, if adopted, for terrestrial contacts within Europe; satellites and eme continuing with the Maidenhead version. Guy plans to be operating from Monaco, signing F6REF/3A2 during the weekend 19/20 April, but mainly there to work eme tuning 144-032 to 0-035MHz.

### Facsimile transmissions using BBC micro

The illustration shows an interesting picture transmitted on 144MHz fm, modulated by the output from a BBC micro computer and submitted by Malcolm Fry, G6VHI, of Warwick. A screen dump was sent to G4WAE, G6YGX and G0DKR, all of Coventry, who received good copy. Data is transmitted and received using a standard packet hook-up line between the micro's cassette port and the rig's microphone (input) and audio (output) sockets. So far transmission has been at 300 baud only, and at this rate a pix takes about 10min to transmit, so the pa gets rather hot with constant carrier! 1,200 baud would be more acceptable, Malcolm says, but this might require an interface.



An example of a picture transmitted on 144MHz fm using a BBC micro. Photo: G6VHI

Malcolm has authorized me to send copies of the relevant program to those requiring them. Please send me an sae plus another 30p in stamps to cover photocopying, or write to Malcolm, QTHR. He hopes to publish a full article on these techniques in *Radio Communication* eventually. □

# Contest News

## 70MHz CW Contest December 1985 results

Activity was quite good for this event, although generally poor conditions meant that even the leading stations worked only a fairly low percentage of the available contacts. Despite this, many logs contained the question "where were the G1, GM, GU and GJ stations", and others requested that beams be turned more frequently to the areas where activity is expected to be low.

The leading station, GW4MGR/P, operated by G3UVR on behalf of the Wirral & DARC had a convincing lead over the other portable entry, EI2CA/P, who also features as best dx for many stations.

Congratulations and certificates go to both these stations and to G3UKV as leading fixed station.

### G3LCH

| Posn | Callsign | Pts | QSOs | Loc    | Best dx  | Kms | Antenna    |
|------|----------|-----|------|--------|----------|-----|------------|
| 1    | GW4MGR/P | 355 | 46   | IO83JA | G3YFF    | 348 | 6E/40/1850 |
| 2    | EI2CA/P  | 261 | 20   | IO62US | G4VIX    | 463 | 6E/10/2020 |
| 3    | G3UKV    | 257 | 37   | IO82RR | E19BG    | 409 | 4E/70/185  |
| 4    | G3ICT    | 230 | 36   | IO91TG | EI2CA/P  | 442 | 5E/30/350  |
| 5    | G4VIX    | 182 | 33   | JO01CN | EI2CA/P  | 463 | 5E/30/100  |
| 6    | G3TCU    | 169 | 29   | IO91OE | EI2CA/P  | 426 | 7E/32/250  |
| 7    | G3VIP    | 138 | 21   | IO93XN | GW4HBK   | 298 | 4E/46/20   |
| 8    | G3XWZ/A  | 109 | 22   | IO93JD | EI2CA/P  | 310 | 1E/220/220 |
| 9    | G3BPM    | 103 | 16   | IO80QW | EI2CA/P  | 315 | 1E/18/195  |
| 10   | G4WVO/A  | 100 | 10   | IO70NM | G3TCT    | 327 | 3E/20/150  |
| 11   | GW4HBK   | 58  | 8    | IO81KP | —        | —   | 3E/36/850  |
| 12   | G4EYD    | 57  | 17   | IO92AJ | G3VIP    | 180 | 4E/30/500  |
| 13   | G4FOH    | 54  | 10   | IO92XJ | GW4MGR/P | 227 | 5E/24/30   |
| 14   | G5UM     | 44  | 12   | IO92MP | G3TCT    | 147 | 3E         |
| 15   | G8LM     | 39  | 11   | IO92LK | —        | —   | 1E         |
| 16   | G2DHY    | 35  | 7    | JO01BK | GW4MGR/P | 280 | 3E/12/150  |

Checklogs gratefully acknowledged from G3OIC and G4ZFO  
Antenna information: No of elements/ft above ground/ft asl  
\*50-500MHz log periodic

## 144MHz Fixed Station and Affiliated Societies Contest results

The changes made to this contest to include an inter-club element were warmly welcomed, and produced twice as many entries as in previous years. Despite the fact that activity levels were very high, with many stations operating in close physical proximity, there were very few bad signal complaints this year. Perhaps this is because the entrants took some trouble to check their equipment beforehand so that they did not cause other members of their own team any problems.

Conditions were fairly average for the contest, with the leaders making slightly fewer contacts than last year's winners, and with the south and east coast stations making numerous contacts into the continent.

Congratulations go to the zonal certificate winners, and particularly to G4ANT and G0BUK as overall winners of the multi- and single-operator sections, and to the Sheppey Western Contest Group who achieved a commanding lead in the AFS table.

Your comments on changes and improvements to the rules would be welcomed, with the aim of continuing to increase participation in this popular event.

Many stations did not supply details of their zone, and some affiliated societies did not provide the information required in the rules. In some cases teams were composed of stations in different zones, and in these cases the zone for team award purposes has been taken to be that of the normal society meeting place.

Checklogs are gratefully acknowledged from G8XTV, RS25429, DG4BE, G6NSY, PE1HLB, PE1EWR, and G4PSU. Disqualified: G0DDJ, G0CNO, G4XEW, G1NRM, G1LKY: G8VGF, G1LSK, G3PVU, G4STO Rule 2a. G4YFO, G4KDL, G3KJU, G4YFO, G10EU, G8VOJ Rule 2b. G0BXO/A Rule 4b. G6PFN Rule 12b.

### G3XDY

| SINGLE-OPERATOR SECTION |          |      |       |      |      |          |      |
|-------------------------|----------|------|-------|------|------|----------|------|
| Posn                    | Callsign | Zone | Score | QSOs | Posn | Callsign | Zone |
| 1                       | G0BUK    | C    | 3,080 | 327* | 26   | G1KOF    | A    |
| 2                       | G3NNG    | D    | 3,023 | 402* | 27   | G11JUS   | F    |
| 3                       | G4DCV    | C    | 2,990 | 304  | 28   | G8LYB    | B    |
| 4                       | G4ASR    | B    | 2,987 | 345* | 29   | G1KJC    | B    |
| 5                       | G4WFR    | C    | 2,492 | 265  | 30   | G0CLP    | B    |
| 6                       | G4LUA    | C    | 2,337 | 208  | 31   | G5SW2    | B    |
| 7                       | G1KYN    | C    | 2,098 | 240  | 32   | G2VJ     | B    |
| 8                       | G4MYR    | C    | 1,814 | 289  | 33   | G8BFFX   | G    |
| 9                       | G4SHC    | A    | 1,703 | 257* | 34   | G62MX    | D    |
| 10                      | G6DYL    | A    | 1,598 | 263  | 35   | G10BX    | A    |
| 11                      | G4ZKS    | C    | 1,543 | 185  | 36   | G2LO     | C    |
| 12                      | G4XEN    | B    | 1,425 | 205  | 37   | G418R    | D    |
| 13                      | G3XBY    | B    | 1,348 | 244  | 38   | G4DF1    | C    |
| 14                      | G4RW0    | A    | 1,327 | 169  | 39   | G6HYT    | B    |
| 15                      | G4MWD    | C    | 1,229 | 254  | 40   | G10HM    | B    |
| 16                      | G0CDA    | A    | 1,228 | 200  | 41   | G4JLC    | A    |
| 17                      | G10BM    | D    | 1,117 | 210  | 42   | G8SRL    | C    |
| 18                      | G4YFN    | D    | 986   | 201  | 43   | G1MUR    | A    |
| 19                      | G4HYC    | C    | 974   | 193  | 44   | G3Y0Y    | A    |
| 20                      | G8TPR    | C    | 973   | 199  | 45   | G4ULS    | B    |
| 21                      | G6IAT    | B    | 971   | 190  | 46   | G4HAM    | G    |
| 22                      | G4EPA    | C    | 923   | 208  | 47   | G1ELY    | A    |
| 23                      | G6FLB    | C    | 863   | 106  | 48   | G0ANT    | C    |
| 24                      | G6ATZ    | F    | 854   | 67*  | 49   | G4GTN    | A    |
| 25                      | G4HLX    | D    | 827   | 174  | 50   | G1EUU    | A    |

| Posn | Callsign | Zone | Score | QSOs | Posn | Callsign | Zone | Score | QSOs |
|------|----------|------|-------|------|------|----------|------|-------|------|
| 51   | G8ZRE    | A    | 525   | 118  | 112  | G4WFK    | C    | 224   | 48   |
| 52   | G4ZVA    | A    | 524   | 96   | 113  | G1IPI    | D    | 223   | 66   |
| 53   | G0CES    | A    | 518   | 107  | 114  | G2HIF    | D    | 217   | 60   |
| 54   | G0D01    | C    | 514   | 70   | 115  | G6NUZ    | B    | 215   | 41   |
| 55   | G4ZPL    | C    | 512   | 119  | 116  | G4MYB    | A    | 204   | 42   |
| 56   | G1JVO    | B    | 507   | 124  | 117  | G6MXL    | C    | 203   | 37   |
| 57   | G4NI Y   | A    | 506   | 132  | 118  | G4UJZ    | C    | 203   | 63   |
| 58   | G1G5B    | C    | 506   | 66   | 119  | G0CUE    | D    | 198   | 64   |
| 59   | G1ICB    | C    | 500   | 98   | 120  | G6MRP    | C    | 190   | 59   |
| 60   | G3WPF    | C    | 493   | 121  | 121  | G8AI K   | C    | 184   | 88   |
| 61   | G6NUM    | C    | 480   | 105  | 122  | G6N1N    | C    | 176   | 50   |
| 62   | G4HVR    | B    | 477   | 104  | 123  | G1HXC    | B    | 173   | 57   |
| 63   | G10VE    | C    | 470   | 77   | 124  | G6AAU    | D    | 172   | 57   |
| 64   | G6Z0E    | C    | 458   | 60   | 125  | G4M4G1   | C    | 164   | 23   |
| 65   | G1F0N    | D    | 455   | 74   | 126  | G6PCX    | A    | 160   | 36   |
| 66   | G8CHW    | C    | 449   | 151  | 127  | G6MKS    | C    | 159   | 47   |
| 67   | G8TWH    | C    | 449   | 140  | 128  | G4LJR    | C    | 153   | 37   |
| 68   | G6XHU    | C    | 446   | 100  | 129  | G1JWR    | C    | 153   | 33   |
| 69   | G8VPE    | C    | 444   | 52   | 130  | G3BFP    | C    | 148   | 53   |
| 70   | G4RPO    | C    | 442   | 118  | 131  | G6AOT    | B    | 140   | 34   |
| 71   | G1HYU    | C    | 423   | 59   | 132  | G1PMH    | C    | 138   | 41   |
| 72   | G4YME    | D    | 406   | 117  | 133  | G3WFM    | C    | 133   | 94   |
| 73   | G3GDU    | C    | 403   | 95   | 134  | G1RKB    | C    | 133   | 57   |
| 74   | G1LGF    | C    | 385   | 64   | 135  | G4FRS    | D    | 131   | 51   |
| 75   | G1GJA    | B    | 376   | 115  | 136  | G4MFR    | C    | 128   | 45   |
| 76   | G1JMF    | C    | 365   | 95   | 137  | G4GGV    | C    | 120   | 35   |
| 77   | G8ZXC    | C    | 365   | 103  | 138  | G100B    | D    | 120   | 40   |
| 78   | G4WAY    | C    | 357   | 126  | 139  | G1K0A    | C    | 111   | 31   |
| 79   | G3I2D    | A    | 355   | 63   | 140  | G6SKU    | B    | 100   | 28   |
| 80   | G3ILO    | C    | 354   | 70   | 141  | G8CWB    | C    | 98    | 32   |
| 81   | G4CIB    | D    | 353   | 83   | 142  | G6YMR    | D    | 91    | 74   |
| 82   | G8YGO    | C    | 345   | 98   | 143  | G2DHY    | C    | 88    | 45   |
| 83   | G1GNZ    | A    | 320   | 76   | 144  | G4ELF    | C    | 85    | 49   |
| 84   | G401V    | C    | 320   | 100  | 145  | G6TWF    | C    | 83    | 41   |
| 85   | G3KOH    | A    | 312   | 70   | 146  | G4SBR    | B    | 77    | 24   |
| 86   | G1ISZ    | D    | 311   | 80   | 147  | G3WOG    | C    | 72    | 44   |
| 87   | G3JMB    | C    | 310   | 89   | 148  | G3LP     | D    | 67    | 27   |
| 88   | G3LRS    | C    | 309   | 72   | 149  | G63ZBE   | G    | 62    | 6    |
| 89   | G680V    | C    | 308   | 98   | 150  | G1JOC    | C    | 55    | 20   |
| 90   | G3YVR    | G    | 291   | 83   | 151  | G63UJ    | G    | 55    | 15   |
| 91   | G10GV    | C    | 290   | 65   | 152  | G4WXC    | C    | 53    | 30   |
| 92   | G3ORX    | D    | 289   | 69   | 153  | G08A1    | C    | 53    | 20   |
| 93   | G6XRD    | C    | 288   | 80   | 154  | G6RYL    | B    | 48    | 38   |
| 94   | G3TWG    | C    | 286   | 91   | 155  | G6C00    | C    | 47    | 24   |
| 95   | G3WSY    | C    | 282   | 73   | 156  | G3VCI    | C    | 47    | 24   |
| 96   | G0AYI    | C    | 277   | 91   | 157  | G4NYH    | B    | 46    | 24   |
| 97   | G80MI    | B    | 274   | 72   | 158  | G6IAF    | B    | 45    | 45   |
| 98   | G4BPE    | C    | 273   | 64   | 159  | G8XYX    | C    | 38    | 17   |
| 99   | G4J01    | C    | 269   | 87   | 160  | G61CJ    | B    | 37    | 19   |
| 100  | G4NVM    | C    | 266   | 74   | 161  | G4UDE    | C    | 35    | 28   |
| 101  | G4IFY    | C    | 264   | 88   | 162  | G6M8BP   | C    | 29    | 11   |
| 102  | G4WBR    | D    | 259   | 72   | 163  | G4IVJ    | B    | 28    | 22   |
| 103  | G6AAT    | D    | 259   | 75   | 164  | G6IRW    | A    | 26    | 16   |
| 104  | G0A0U    | A    | 259   | 70   | 165  | G10SE    | C    | 26    | 16   |
| 105  | G1PDW    | C    | 246   | 49   | 166  | G4NFZ    | C    | 23    | 21   |
| 106  | G1CWS    | A    | 243   | 55   | 167  | G6LKB    | A    | 20    | 20   |
| 107  | G6HLL    | C    | 242   | 60   | 168  | G6ACM    | D    | 14    | 12   |
| 108  | G6W0LW   | C    | 238   | 52   | 169  | G6WA     | A    | 8     | 6    |
| 109  | G4YCA    | A    | 229   | 76   | 170  | G4XYX    | D    | 6     | 6    |
| 110  | G8UYO    | B    | 227   | 63   | 171  | G68VU    | C    | 5     | 5    |
|      | G4F01    | C    | 227   | 90   |      |          |      |       |      |

### MULTI-OPERATOR SECTION

| Posn | Callsign | Zone | Score | QSOs | Posn | Callsign | Zone | Score | QSOs |
|------|----------|------|-------|------|------|----------|------|-------|------|
| 1    | G4ANT    | C    | 4,723 | 422* | 41   | G4IUF    | C    | 632   | 78   |
| 2    | G4N0X    | B    | 3,588 | 404* | 42   | G3ZMS    | C    | 606   | 128  |
| 3    | G4SIV    | C    | 3,442 | 336  | 43   | G1AHM    | A    | 603   | 111  |
| 4    | G4BWC    | C    | 3,180 | 438  | 44   | G8ZKE    | B    | 593   | 148  |
| 5    | G04IDM   | A    | 3,134 | 288* | 45   | G6WYL    | C    | 582   | 106  |
| 6    | G4ZAP    | B    | 2,940 | 410  | 46   | G3U0A    | C    | 568   | 186  |
| 7    | G3K1F    | D    | 2,884 | 400* | 47   | G1ARL    | A    | 541   | 141  |
| 8    | G4WET    | B    | 2,493 | 379  | 48   | G6YNL    | D    | 521   | 145  |
| 9    | G4WU1    | D    | 2,221 | 323  | 49   | G0BK0    | C    | 514   | 169  |
| 10   | G4GTX    | B    | 2,136 | 304  | 50   | G8UJ0    | C    | 513   | 97   |
| 11   | G4TVI    | C    | 2,050 | 220  | 51   | G0AKK    | C    | 493   | 145  |
| 12   | G3W01    | D    | 1,951 | 303  | 52   | G8IUB    | C    | 465   | 121  |
| 13   | G4UCV    | C    | 1,682 | 299  | 53   | G4VXS    | C    | 456   | 68   |
| 14   | G4MGR    | C    | 1,518 | 265  | 54   | G4NWS    | A    | 454   | 125  |
| 15   | G4RTR    | D    | 1,507 | 191  | 55   | G1PJ1    | D    | 434   | 63   |
| 16   | G3PIA    | D    | 1,449 | 246  | 56   | G1NPP    | B    | 427   | 108  |
| 17   | G6BGB    | B    | 1,388 | 242  | 57   | G3QWB    | B    | 420   | 123  |
| 18   | G3VCG    | B    | 1,307 | 239  | 58   | G4I10    | B    | 399   | 94   |
| 19   | G3WHK    | C    | 1,222 | 246  | 59   | G3C0K    | C    | 388   | 130  |
| 20   | G1HHH    | C    | 1,215 | 184  | 60   | G6W1NR   | E    | 387   | 106  |
| 21   | G4TDL    | D    | 1,212 | 222  | 61   | G5JYB    | C    | 367   | 77   |
| 22   | G8KPL    | A    | 1,173 | 163  | 62   | G3ZT1    | C    | 349   | 104  |
| 23   | G3JKT    | C    | 1,126 | 214  | 63   | G80L1    | A    | 346   | 124  |
| 24   | G3GR0    | C    | 1,083 | 185  | 64   | G8TRS    | C    | 333   | 92   |
| 25   | G6W20P   | E    | 1,078 | 122* | 65   | G6VJP    | C    | 298   | 59   |
| 26   | G4NVA    | C    | 1,032 | 203  | 66   | G3SDC    | C    | 292   | 125  |
| 27   | G4XBN    | B    | 966   | 192  | 67   | G0CWC    | C    | 264   | 113  |
| 28   | G6LNU    | C    | 873   | 192  | 68   | G4W8RS   | C    | 260   | 62   |
| 29   | G8DMR    | C    | 867   | 194  | 69   | G4GXP    | C    | 256   | 99   |
| 30   | G4TZM    | C    | 842   | 147  | 70   | G6EEV    | D    | 213   | 67   |
| 31   | G4MRD    | B    | 813   | 172  | 71   | G4ZUL    | E    | 209   | 73   |
| 32   | G4OK1    | C    | 737   | 125  | 72   | G8AZC    | C    | 207   | 82   |
| 33   | G4YIR    | C    | 735   | 127  | 73   | G1LYY    | C    | 199   | 68   |
| 34   | G31AD    | D    | 727   | 150  | 74   | G1CNT    | A    | 193   | 57   |
| 35   | G6GMY    | A    | 706   | 112  | 75   | G4XFO    | D    | 173   | 59   |
| 36   | G80CZ    | C    | 690   | 139  | 76   | G6W0CV   | G    | 167   | 21*  |
| 37   | G4WZ0    | C    | 658   | 108  | 77   | G6PHB    | D    | 135   | 39   |
| 38   | G4LKD    | C    | 657   | 108  | 78   | G8KFP    | D    | 129   | 69   |
| 39   | G4WMC    | B    | 633   | 179  | 79   | G4WCK    | D    | 108   | 26   |
|      | G8NRP    | D    | 633   | 150  |      |          |      |       |      |

| OVERALL RESULTS |                        |      |        |                |        |       |       |       |  | FIXED SECTION |          |      |       |             |        |          |       |          |  |
|-----------------|------------------------|------|--------|----------------|--------|-------|-------|-------|--|---------------|----------|------|-------|-------------|--------|----------|-------|----------|--|
| Posn            | Affiliated society     | Zone | Score  | Callsigns used |        |       |       |       |  | Posn          | Callsign | Loc  | Pts   | (Dbw) Power | Ant    | Best dx  | Km    | Sessions |  |
| 1               | Sheppey Western CG     | B    | 13,158 | G4NXX          | G4ASR  | G3KFT | G4GFX | G6B8G |  | 1             | G4SIV    | 92TR | 2,948 | 24          | 2 x 21 | OH0NC    | 1,487 | 1,2,4    |  |
| 2               | Harwell ARS 'A'        | D    | 6,819  | G3NNG          | G3PIA  | G4HLX | G6ZMX | G8NRP |  | 2             | G8TFI    | 81UO | 2,818 | 26          | 16     | SM5AFM   | 1,133 | 1,2,4    |  |
| 3               | Colchester RA 'A'      | C    | 6,457  | G4WFR          | G4ZKS  | G4TZW | G4OKI | G4YR  |  | 3             | G4LOJ    | 02ON | 2,616 | 26          | 26e1OL | SM4IVE   | 1,144 | 2,4,5    |  |
| 4               | Hastings E & RC        | B    | 5,516  | G0BUX          | G1HHH  | G1ICB | G1OGV | G4VYM |  | 4             | G8OHM    | 92AJ | 2,107 | 20          | 24     | OH0NC    | 1,593 | 2,4,5    |  |
| 5               | Nene Valley RC         | C    | 4,405  | G4XEN          | G4X8N  | G1ICJ | G6GZW | G4ZPL |  | 5             | G8HHI    | 91OH | 1,277 | 26          | 2 x 21 | LA6LCA   | 1,127 | 2,4,5    |  |
| 6               | Norfolk ARC 'A'        | A    | 4,340  | G4LUA          | G0D01  | G1G8B | G6Z0E | G4VXS |  | 6             | G8JJR    | 93KL | 1,185 | 15          | 48Mbm  | OH0NC    | 1,474 | 1,2,5    |  |
| 7               | South Lakeland ARS     | C    | 3,847  | G4RWO          | G8KPL  | G1DOX | G3I2O | G3KOH |  | 7             | G4ULS    | 82TI | 1,028 | 17          | 19     | SM6FYU   | 1,075 | 2,4,5    |  |
| 8               | Crawley ARC            | C    | 3,638  | G3JFK          | G3GRO  | G6LMU | G3YVR | G8AZC |  | 8             | G6UVZ    | 94FW | 833   | 17          | 48Mbm  | OK1KEI/P | 1,245 | 1,2,5    |  |
| 9               | Five Bells CG          | A    | 3,498  | G4SIV          |        |       |       |       |  | 9             | G4TAW    | 01BI | 701   | 23          | 19     | SM6CMU   | 1,019 | 2,4,5    |  |
| 10              | Isle of Man ARS CG     | C    | 3,152  | G04IOM         |        |       |       |       |  | 10            | G6IAT    | 91TV | 528   | 17          | 24Pbm  | OZ8CE    | 823   | 1,2,5    |  |
| 11              | Colchester RA 'B'      | B    | 3,017  | G4LKO          | G4LJF  | G6WYL | G0ANZ | G8IUO |  | 11            | G1KDF    | 83NN | 402   | 17          | 19     | FI6XB    | 580   | 1,4,5    |  |
| 12              | Derbyshire Hills CG    | B    | 2,940  | G4ZAP          |        |       |       |       |  | 12            | G4YFN    | 91MK | 311   | 14          | 19     | SM0KCR   | 1,124 | 1,2,4    |  |
| 13              | Rugby ATS              | C    | 2,548  | G4EPA          | G8LYB  | G8TWH | G1LVY | G0C00 |  | 13            | G4ZNM    | 00BS | 268   | 18          | 2 x 19 | G8JHL    | 347   | 1,3,4    |  |
| 14              | Cray Valley RS         | B    | 2,508  | G4MVR          | G4DFI  |       |       |       |  | 14            | G8MLO    | 01CL | 238   | 12          | 19     | GW4MGR/P | 288   | 1,3,4    |  |
| 15              | Triple B CG            | C    | 2,493  | G4WE1          |        |       |       |       |  | 15            | G4IDF    | 82VE | 230   | 10          | 11     | SM6EAN   | 1,083 | 2,4,5    |  |
| 16              | Horsham ARC            | B    | 2,431  | G4NWO          | G3NPF  | G3GOU | G4LJR | G4NFR |  | 16            | G8HXU    | 83RF | 192   | 8           | 17     | G4COR    | 302   | 3,4,5    |  |
| 17              | South Birmingham RS    | B    | 2,339  | G3XBY          | G10HM  | G1JJA |       |       |  | 17            | G6PAD    | 82XK | 139   | 0           | 19     | G4LOJ    | 232   | 2,3,5    |  |
| 18              | North Bucks CG         | O    | 2,244  | G4NUT          |        |       |       |       |  | 18            | G6ZKI    | 92DA | 135   | 10          | 19     | G0AWP/P  | 185   | 1,2,4    |  |
| 19              | Mayland & O ARS        | C    | 2,218  | G4IVI          |        |       |       |       |  | 19            | G8UYD    | 93JD | 84    | 10          | 6e1Q   | OZ1EYE   | 780   | 1,2,5    |  |
| 20              | Eastbourne E & ARC     | A    | 2,190  | G1FKN          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 21              | South Manchester RC    | C    | 2,178  | G4JLG          | G1MUR  | G4N1Y | G0ADU | G4MYB |  |               |          |      |       |             |        |          |       |          |  |
| 22              | Newbury & O ARS        | O    | 1,951  | G3W0I          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 23              | Sutton & Cheam RS      | C    | 1,861  | G3WHK          | G3CDK  | G4E0I |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 24              | West Kent ARS          | B    | 1,830  | G4GTN          | G4PRO  | G8ZXC | G401V | G61WF |  |               |          |      |       |             |        |          |       |          |  |
| 25              | Newark & O ARC         | B    | 1,785  | G4HVC          | G6NUM  | G4PPE |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 26              | Bracknell ARC          | O    | 1,690  | G4TDL          | G6AFF  | G6AAU | G6ACM |       |  |               |          |      |       |             |        |          |       |          |  |
| 27              | Brimsford & O ARC      | B    | 1,554  | G3VGG          | G1HXC  | G6SKU | G4NYH | G4IVJ |  |               |          |      |       |             |        |          |       |          |  |
| 28              | Harwell ARS 'B'        | O    | 1,558  | G6YNL          | G4YME  | G2HIF | G6MRP | G6YMR |  |               |          |      |       |             |        |          |       |          |  |
| 29              | Chesler & O RS         | A    | 1,551  | G8ZRE          | G0CES  | G1GWS | G4YCA | G6IRW |  |               |          |      |       |             |        |          |       |          |  |
| 30              | Wirral & O ARC         | C    | 1,526  | G4MGR          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 31              | Flight Reluelling ARS  | O    | 1,513  | G4RFR          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 32              | Surrey Radio Contact C | B    | 1,398  | G0BKD          | G4WAY  | G4FFY | G38FP | G4ELE |  |               |          |      |       |             |        |          |       |          |  |
| 33              | Grantham RC            | B    | 1,310  | G1EUI          | G1JME  | G4WFK | G8CW8 | G4WXC |  |               |          |      |       |             |        |          |       |          |  |
| 34              | Gloucester ARS         | O    | 1,230  | G4CIB          | G1ISZ  | G0CUE | G6EEV | G3LP  |  |               |          |      |       |             |        |          |       |          |  |
| 35              | Farnborough & O RS     | O    | 1,207  | G8SRL          | G1IPO  | G8ATK | G4FRS | G4UDE |  |               |          |      |       |             |        |          |       |          |  |
| 36              | Pembroke & O ARC       | E    | 1,154  | G6W2P          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 37              | Skegness & O ARS       | B    | 1,080  | G6HYF          | G6NUZ  | G6ADT | G4SBR |       |  |               |          |      |       |             |        |          |       |          |  |
| 38              | Aberdeen ARC           | G    | 1,034  | G6RFFX         | G6OCOV | G632B | G63UO | G6M8P |  |               |          |      |       |             |        |          |       |          |  |
| 39              | Mid Cheshire ARS       | B    | 975    | G3ZT1          | G6HXU  | G4XFO | G6BYU |       |  |               |          |      |       |             |        |          |       |          |  |
| 40              | Grimsby ARS            | B    | 969    | G4NVR          | G4YIO  | G6RYL | G6IAE |       |  |               |          |      |       |             |        |          |       |          |  |
| 41              | Brighton & O ARS       | C    | 929    | G8DMR          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 42              | Maidenhead & O ARC     | B    | 845    | G3TWG          | G0AYA  | G4GGV | G3WOG | G3VC1 |  |               |          |      |       |             |        |          |       |          |  |
| 43              | Bristol ARC            | O    | 750    | G3TAD          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 44              | Thornhill Clevellys RS | A    | 724    | G6GMW          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 45              | Leicester RS           | B    | 717    | G3LRS          | G4JOI  | G0BAI | G8XYX |       |  |               |          |      |       |             |        |          |       |          |  |
| 46              | Exmoor RC              | B    | 701    | G4WZ0          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 47              | Univ of Aston RS       | B    | 659    | G3UOA          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 48              | West Mercia CG         | B    | 633    | G4WMG          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 49              | Mid Sussex ARS         | C    | 614    | G3ZMS          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 50              | King Edwards School RS | B    | 593    | G8ZKE          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 51              | Edinburgh & O RC       | G    | 554    | G6HAM          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 52              | Univ of Birmingham ARC | B    | 484    | G8IUB          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 53              | Northampton RC         | B    | 467    | G3GWB          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 54              | Cheshunt & O ARC       | C    | 458    | G4UDZ          | G3WFM  | G1KOA |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 55              | Macclesfield & O RS    | B    | 454    | G4NWS          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 56              | Leicester Poly SU CG   | C    | 450    | G3S0C          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 57              | Norfolk ARC 'B'        | C    | 444    | G8VPE          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 58              | Plymouth Poly RC       | O    | 441    | G1PJI          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 59              | Newport ARS            | E    | 433    | GWINRS         |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 60              | Meillon Mowbray ARS    | B    | 427    | G1NPP          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 61              | Tamworth ARS           | B    | 369    | G0IRS          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 62              | Brunel University ARS  | B    | 349    | G80LI          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 63              | Poole RAS              | O    | 331    | G6MXL          | G4WCK  | G4XYX |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 64              | Kidderminster & D ARS  | B    | 310    | G4GXP          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 65              | Sandwell ARC           | B    | 288    | G6CWC          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 66              | Barry College at FE    | B    | 273    | G4BRS          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |
| 67              | North Bristol ARC      | O    | 135    | G6PN8          |        |       |       |       |  |               |          |      |       |             |        |          |       |          |  |

### 21MHz CW Contest 1985 results

A very welcome increase in the number of entries compared with 1984. The first two G places being very closely contested. As to be expected, the N-3 palh helped to place 9J2BO comfortably at the top of the dx operators. A large number of logs were of a very high standard, which made checking a real pleasure. A few stations did not include a country check list and consequently lost points.

The HF Contests Committee wishes to thank the many stations who lent to in order to verify conlads, enabling us to separate stations in the listings who otherwise would have tied for 2nd, 3rd or 4th place.

Finally, "thank you" for all the comments and anecdotes included with the logs—they certainly brighten up log checking!

|      |          | DX CONTESTANTS |      |           |        |
|------|----------|----------------|------|-----------|--------|
| Posn | Callsign | Points         | Posn | Callsign  | Points |
| 1    | 9J2BO*   | 9,472          | 32   | OK1TW     | 912    |
| 2    | LZ1YE*   | 6,720          | 33   | UW9WB     | 888    |
| 3    | UA4PO*   | 6,510          | 34   | UA4CK     | 881    |
| 4    | UHBEA*   | 6,240          | 35   | UYSTE     | 840    |
| 5    | UA3PDW   | 5,828          | 36   | IK3DNX    | 828    |
| 6    | LZ1KOZ   | 5,544          | 37   | E42CR     | 756    |
| 7    | RW3DW    | 5,031          | 38   | YU7SF     | 651    |
| 8    | 3D6AX*   | 4,860          | 39   | UTSLF     | 615    |
| 9    | YU7RA    | 4,407          | 40   | UW4CN     | 528    |
| 10   | LZ2KCS   | 4,368          | 41   | YO4KCA    | 513    |
| 11   | UJ8JA*   | 3,828          | 42   | OH2EJ     | 450    |
| 12   | LZ1NS    | 3,498          | 43   | LU3EX*    | 432    |
| 13   | G6ZYIEA* | 3,036          | 44   | H8LCL     | 420    |
| 14   | NU4Y*    | 3,024          | 45   | UB4EWE    | 396    |
| 15   | YO9AGI   | 2,976          | 46   | OH5RZ     | 360    |
| 16   | UO500    | 2,850          |      | G4BWP/VP8 | 360    |
| 17   | RBSIA    | 2,820          | 48   | YOSAAT    | 324    |
| 18   | N5JJ     | 2,343          | 49   | DJ9WH     | 288    |
| 19   | UA6ED    | 2,187          | 50   | OH5JD     | 270    |
| 20   | YO8DDP   | 2,160          | 51   | OH9PN     | 255    |
| 21   | K3ZQ     | 1,971          | 52   | RV6AA     | 252    |
| 22   | UA3XBB   | 1,800          |      | 6Y5HN*    | 252    |
| 23   | UBSLF    | 1,680          | 54   | HP1XKR*   | 240    |

\* Candidate winner

## 432MHz Cumulative Contest results

The 1985 cumulatives saw a return to multi-operator entries with a significant increase in the number of entrants. Only one check-log was received, from PE1EWR, and despite last year's comment no swl logs were sent in. How about some next time?

Once again one session (2) provided the majority of points for those in the right place, with some very good dx including OH0 worked by many in the Midlands and North. Unfortunately the southern and western stations were on the edge of the lift. The fourth session was on a Monday and the extra activity helped considerably towards the score of most stations.

Logs were extremely variable, ranging from near perfect, to one that had to be completely rescored due to an unchecked random computer scorer. The new total obviously gave some people problems due to unfamiliarity with the system—obvious mistakes being overlooked and a total belief in the computer's output. This and unmarked duplicates lost several people many hard-earned points.

Some comments were received about bad signals, but unless the "offending" stations are advised then they can't be expected to remedy the problem. There is evidence in one case that steps were immediately taken to clear the problem once advised of it. So, if you're certain it isn't your receiver, bring it to their attention; then if nothing is done report it in your logs.

Congratulations and certificates go to G4SIV, for once again being the leading fixed station, G8TFI as runner-up having stayed at home, and to GW4MGR/P for winning the all-other section.

G4NBS

| ALL OTHER SECTION |            |      |       |             |        |          |       |          |  |
|-------------------|------------|------|-------|-------------|--------|----------|-------|----------|--|
| Posn              | Callsign/P | Loc  | Pts   | (Dbw) Power | Ant    | Best dx  | Km    | Sessions |  |
| 1                 | GW4MGR     | 83JA | 4,124 | 20          | 2 x 19 | SM4IVE   | 1,341 | 2,4,5    |  |
| 2                 | G4NVA      | 93AD | 2,730 | 24          | 2 x 21 | SM4IAZ   | 1,256 | 1,2,4    |  |
| 3                 | G4JZF      | 92BN | 1,703 | 16          | 19     | OH0NC    | 1,577 | 2,4,5    |  |
| 4                 | GW8ACG     | 83JF | 1,558 | 20          | 46Mbm  | DC6WG    | 869   | 2,4,5    |  |
| 5                 | GM8MJV     | 85IS | 595   | 20          | 2 x 21 | G8FUO    | 508   | 3,4,5    |  |
| 6                 | G6CSY      | 01BH | 576   | 7           | 19     | LA3VW    | 979   | 1,2,4    |  |
| 7                 | G6ZKI      | 91KV | 92    | 10          | H89CV  | GW4MGR/P | 189   | 3,5      |  |

Disqualified: G0AWP/P and G4YTO/P—late entries, used as checklog  
G3CXR/P—General Rule 19

## 21MHz CW Contest 1985 results

A very welcome increase in the number of entries compared with 1984. The first two G places being very closely contested. As to be expected, the N-S path helped to place 9J2BO comfortably at the top of the dx operators. A large number of logs were of a very high standard, which made checking a real pleasure. A few stations did not include a country check list and consequently lost points.

The HF Contests Committee wishes to thank the many stations willing to in order to verify contacts, enabling us to separate stations in the listings who otherwise would have tied for 2nd, 3rd or 4th place.

Finally, "thank you" for all the comments and anecdotes included with the logs—they certainly brighten up log checking!

G3HCT

| DX CONTESTANTS |           |        |      |             |        |
|----------------|-----------|--------|------|-------------|--------|
| Posn           | Callsign  | Points | Posn | Callsign    | Points |
| 1              | 9J2BO     | 9,472  | 32   | OK1TW       | 912    |
| 2              | LZ1YE     | 6,720  | 33   | UW9WB       | 888    |
| 3              | UA4PO     | 6,510  | 34   | UA4CK       | 881    |
| 4              | UH8EA     | 6,240  | 35   | UY5TE       | 840    |
| 5              | UA3PDW    | 5,828  | 36   | IK3DNX      | 828    |
| 6              | LZ1KOZ    | 5,544  | 37   | EA2CR       | 756    |
| 7              | RW3DW     | 5,031  | 38   | YU7SF       | 651    |
| 8              | 3DBAX     | 4,880  | 39   | UTSLF       | 615    |
| 9              | YU7RA     | 4,407  | 40   | UW4CN       | 528    |
| 10             | LZ2KCS    | 4,368  | 41   | YQ4KA       | 513    |
| 11             | UJ8JA     | 3,828  | 42   | OH2EJ       | 450    |
| 12             | LZ1NS     | 3,498  | 43   | LU3EX       | 432    |
| 13             | G6ZYEA6   | 3,036  | 44   | HBLC        | 420    |
| 14             | NU4Y      | 3,024  | 45   | UB4EWE      | 396    |
| 15             | Y09AGI    | 2,970  | 46   | { OH5RZ     | 360    |
| 16             | U0500     | 2,850  |      | { G4BWP/VP9 | 360    |
| 17             | RB5IA     | 2,820  | 48   | YOSAAT      | 324    |
| 18             | N5JJ      | 2,343  | 49   | DJ9WH       | 288    |
| 19             | UA6ED     | 2,187  | 50   | OH5JD       | 270    |
| 20             | Y0BDDP    | 2,160  | 51   | OH9PN       | 255    |
| 21             | K3ZQ      | 1,971  | 52   | { RV8AA     | 252    |
| 22             | UA3XBB    | 1,800  |      | { 6YSNH     | 252    |
| 23             | UBSLF     | 1,680  | 54   | HP1XKR      | 240    |
| 24             | UB4CWW    | 1,596  | 55   | LZ1FJ       | 210    |
| 25             | UV3DN     | 1,458  | 56   | UMBMU       | 180    |
| 26             | UP2NK     | 1,392  | 57   | F8API       | 144    |
| 27             | RT5UY     | 1,290  | 58   | SMOKV/O     | 132    |
| 28             | LZ2KAC    | 1,050  |      | { DFIEI     | 72     |
| 29             | RA4H1/UM' | 984    | 59   | { UL7TT     | 72     |
| 30             | UTSEH     | 945    | 81   | OK1KZ       | 60     |
| 31             | UA3TAM    | 944    |      |             |        |

| DX SWL |              |        | G SWL   |           |        |
|--------|--------------|--------|---|-----------|--------|
| Posn   | Call sign    | Points | Posn  | Call sign | Points |
| 1      | UB5-073-38   | 1,752  | 1   | BRS1066   | 11,232 |
| 2      | UT5-187-1    | 1,593  | 2   | BRS52868  | 8,048  |
| 3      | UA4-148-481  | 1,539  | Check logs: G4FDC, G3KZJ, JWQA, UP2FF, ZS6ME, NN351, K04D, RA3VO, WISOX, G3BPM, G4UOL |           |        |
| 4      | UB5-077-1143 | 1,053  |   |           |        |
| 5      | UA4-148-363  | 792    |   |           |        |
| 6      | ONL383       | 117    |   |           |        |

\* Certificate winners

## RSGB 21/28MHz SSB Contest 1985 results

Entries for this event were down by about 30 per cent on last year. This unfortunate relapse in what has always been a popular contest must be due to the poor conditions experienced worldwide. This year's winner, GW4BLE, would have been in seventh place last year, and he has a 28,000 points cushion between him and second placed G3NAS. Despite the conditions some creditable performances were made on 21MHz. Approximately 400 overseas stations gave points to the British Isles representing 85 prefixes and call areas.

Reference to the table will show that 28MHz was poor in the extreme. From the logs it would appear there were two short periods when some contacts were possible, the first from 1000-1130gmt approximately, and another shorter session around 1600gmt. Only 10 overseas logs have claims for contacts, which proves how low conditions were.

It is noticeable that the GW prefix also figures prominently in the multi-operator section. GW4EZW, with eight operators from the Newport ARS, are clear leaders in the only section with an increased entry (one) on last year.

The receiving members will see that Bob Treacher, BRS32525, has once again taken the Melcelf Trophy plus the Powditch Receiving Trophy for good measure.

The overseas section was well supported by stations in the USSR, UA6LQ found 276 G stations on 21MHz only, to narrowly beat 9H1EL who did manage a few contacts on 28MHz to boost his multipliers. It is interesting to note that 11 out of the first 15 emanate from the U prefix areas.

Briefly, comment must be made (like last year) about unmarked duplicate contacts. These still cause a tremendous loss in points—10 times the contact value times the multiplier total. It seems unbelievable that a log of less than 100 contacts could contain three unmarked duplicate contacts. Before anybody writes to the committee, please note that if you score the final table apparent discrepancies may be found in certain results. This is due to deductions being made for errors or unmarked duplicates.

Finally, check logs were received from G4EZA, G4HZA, RT5UO, UA4LCH and UA6KHN for which the adjudicator expresses his thanks to all.

BRS20249

### BRITISH ISLES TRANSMITTING—SINGLE OPERATOR

| Posn | Call sign | 21MHz    |             | 28MHz    |             | Adjudicated score |
|------|-----------|----------|-------------|----------|-------------|-------------------|
|      |           | Contacts | Multipliers | Contacts | Multipliers |                   |
| 1    | GW4BLE††  | 242      | 87          | 27       | 20          | 70,209            |
| 2    | G3NAS*    | 158      | 61          | 23       | 18          | 42,344            |
| 3    | G4EOP*    | 142      | 52          | 14       | 11          | 29,232            |
| 4    | GM4TOO    | 117      | 46          | 8        | 8           | 19,292            |
| 5    | G4IUF     | 125      | 45          | 2        | 2           | 17,660            |
| 6    | G3VOF     | 118      | 46          | 3        | 2           | 17,424            |
| 7    | GW4UZZ    | 95       | 37          | 10       | 8           | 13,545            |
| 8    | G2OT      | 88       | 41          | 12       | 8           | 13,250            |
| 9    | G4OTU     | 98       | 34          | 8        | 3           | 11,544            |
| 10   | G4UCR     | 78       | 30          | 19       | 13          | 10,965            |
| 11   | G4PEL     | 71       | 30          | 13       | 11          | 10,332            |
| 12   | G3WBM/A   | 80       | 33          | 3        | 3           | 8,964             |
| 13   | G3UHU     | 72       | 28          | 11       | 7           | 8,715             |
| 14   | GW4HSH    | 80       | 34          | 1        | 1           | 8,470             |
| 15   | G4OBK     | 80       | 30          | 1        | 1           | 7,502             |
| 16   | G4WEY     | 74       | 27          | 2        | 2           | 6,612             |
| 17   | G3LZO     | 60       | 35          | 1        | 1           | 6,588             |
| 18   | G3YEC     | 73       | 27          | 2        | 2           | 6,525             |
| 19   | G4XRX     | 74       | 28          | 1        | 1           | 6,490             |
| 20   | GM3UTO    | 80       | 26          | 0        | 0           | 8,240             |
| 21   | G4AMT     | 61       | 23          | 2        | 2           | 4,725             |
| 22   | G4FJT     | 64       | 24          | 0        | 0           | 4,608             |
| 23   | G0CGG/P   | 59       | 24          | 0        | 0           | 4,248             |
| 24   | G3UKH     | 46       | 15          | 0        | 0           | 2,070             |
| 25   | G4PCI     | 45       | 13          | 1        | 1           | 1,932             |
| 26   | GM3ULG    | 39       | 16          | 0        | 0           | 1,872             |
| 27   | G3MGW     | 33       | 17          | 1        | 1           | 1,836             |
| 28   | G3OLU     | 32       | 16          | 2        | 2           | 1,836             |
| 29   | G4ZFE     | 41       | 14          | 0        | 0           | 1,708             |
| 30   | G3WKS     | 36       | 14          | 0        | 0           | 1,512             |
| 31   | G3ZGA     | 35       | 13          | 0        | 0           | 1,365             |
| 32   | G3CCZ     | 31       | 14          | 0        | 0           | 1,302             |
| 33   | G6OO      | 27       | 14          | 0        | 0           | 1,134             |
| 34   | G4XTM     | 27       | 7           | 0        | 0           | 597               |
| 35   | G4SDZ     | 21       | 8           | 0        | 0           | 504               |
| 36   | G4LZZ     | 5        | 3           | 0        | 0           | 45                |
| 37   | G3ILO     | 3        | 3           | 0        | 0           | 27                |

† Whilworth Trophy winner

† Powditch Trophy winner

\* Certificate winner

### BRITISH TRANSMITTING—MULTI-OPERATOR

| Posn | Call sign | 21MHz    |             | 28MHz    |             | Adjudicated score |
|------|-----------|----------|-------------|----------|-------------|-------------------|
|      |           | Contacts | Multipliers | Contacts | Multipliers |                   |
| 1    | GW4EZW*   | 184      | 60          | 4        | 4           | 35,904            |
| 2    | G3CSA     | 163      | 61          | 0        | 0           | 29,585            |
| 3    | G3BZU     | 159      | 53          | 11       | 3           | 28,446            |
| 4    | GW4RIB    | 138      | 45          | 10       | 6           | 21,424            |
| 5    | G4NLZ     | 111      | 44          | 4        | 3           | 16,215            |
| 6    | G3EFX/P   | 109      | 37          | 5        | 2           | 12,840            |
| 7    | G6HH      | 89       | 34          | 4        | 3           | 10,008            |
| 8    | G4ATH/A   | 92       | 32          | 0        | 0           | 8,832             |
| 9    | G3MCN     | 91       | 28          | 0        | 0           | 7,616             |
| 10   | G6OI      | 75       | 26          | 2        | 2           | 6,468             |
| 11   | G4GXP     | 67       | 26          | 3        | 3           | 6,090             |
| 12   | G4SVV/P   | 71       | 30          | 7        | 7           | 5,328             |
| 13   | G8CA/A    | 72       | 22          | 2        | 2           | 5,328             |
| 14   | G4ORC/A   | 39       | 13          | 1        | 1           | 1,680             |

### BRITISH ISLES RECEIVING

| Posn | Call sign  | 21MHz    |             | 28MHz    |             | Adjudicated score |
|------|------------|----------|-------------|----------|-------------|-------------------|
|      |            | Contacts | Multipliers | Contacts | Multipliers |                   |
| 1    | BRS32525†† | 83       | 43          | 7        | 6           | 13,132            |
| 2    | BRS26407*  | 66       | 36          | 7        | 4           | 8,640             |
| 3    | BRS28198*  | 42       | 22          | 5        | 5           | 3,780             |
| 4    | BRS20249   | 18       | 13          | 0        | 0           | 702               |

† Melcelf Trophy winner

† Powditch Receiving Trophy winner

\* Certificate winner

### OVERSEAS TRANSMITTING—MULTI-OPERATOR

| Posn | Call sign | 21MHz    |             | 28MHz    |             | Adjudicated score |
|------|-----------|----------|-------------|----------|-------------|-------------------|
|      |           | Contacts | Multipliers | Contacts | Multipliers |                   |
| 1    | UZ4WWB*   | 150      | 15          | 0        | 0           | 6,735             |
| 2    | UZ8LWT    | 53       | 11          | 0        | 0           | 1,738             |
| 3    | JK2GSN    | 35       | 7           | 0        | 0           | 735               |
| 4    | UJ9JWI    | 24       | 10          | 0        | 0           | 710               |
| 5    | UM9MWO    | 8        | 3           | 0        | 0           | 72                |

### OVERSEAS RECEIVING

| Posn | Call sign     | 21MHz    |             | 28MHz    |             | Adjudicated score |
|------|---------------|----------|-------------|----------|-------------|-------------------|
|      |               | Contacts | Multipliers | Contacts | Multipliers |                   |
| 1    | UA3-157-796*  | 60       | 15          | 0        | 0           | 2,700             |
| 2    | UA3-121-1518* | 54       | 16          | 0        | 0           | 2,592             |
| 3    | LZ1L73*       | 32       | 15          | 3        | 3           | 1,890             |
| 4    | UA3-170-528   | 39       | 11          | 0        | 0           | 1,287             |
| 5    | UB5-073-2845  | 36       | 9           | 0        | 0           | 972               |
| 6    | UL7-026-586   | 19       | 8           | 0        | 0           | 456               |
| 7    | OH1-111       | 18       | 7           | 0        | 0           | 378               |
| 8    | ONL383        | 18       | 7           | 0        | 0           | 336               |
| 9    | HE9ORZ        | 20       | 5           | 0        | 0           | 300               |
| 10   | UA2-125-894   | 12       | 4           | 0        | 0           | 144               |
| 11   | OK1-20897     | 9        | 4           | 0        | 0           | 108               |
| 12   | UA9-154-4     | 8        | 4           | 0        | 0           | 96                |
| 13   | UA0-124-190   | 5        | 3           | 0        | 0           | 45                |

### OVERSEAS TRANSMITTING—SINGLE OPERATOR

| Posn | Call sign    | 21MHz    |             | 28MHz    |             | Adjudicated score |
|------|--------------|----------|-------------|----------|-------------|-------------------|
|      |              | Contacts | Multipliers | Contacts | Multipliers |                   |
| 1    | UA6LQ*       | 278      | 22          | 0        | 0           | 18,194            |
| 2    | 9H1EL*       | 240      | 19          | 1        | 5           | 18,000            |
| 3    | UZ4FWO*      | 264      | 20          | 1        | 1           | 16,443            |
| 4    | UA4PO        | 281      | 19          | 0        | 0           | 14,877            |
| 5    | UV6LC        | 244      | 24          | 0        | 0           | 13,968            |
| 6    | RB7GA*       | 197      | 23          | 0        | 0           | 13,563            |
| 7    | 9H1GI        | 235      | 19          | 0        | 0           | 13,395            |
| 8    | 9J2BO*       | 224      | 15          | 5        | 4           | 13,034            |
| 9    | UH8EA*       | 207      | 20          | 0        | 0           | 12,360            |
| 10   | RW3DW        | 148      | 18          | 0        | 0           | 7,992             |
| 11   | RB5II*       | 162      | 15          | 0        | 0           | 7,290             |
| 12   | UA6LLT       | 109      | 20          | 0        | 0           | 5,220             |
| 13   | EA8TE*       | 120      | 9           | 29       | 5           | 5,258             |
| 14   | UW3EO        | 129      | 15          | 0        | 0           | 5,025             |
| 15   | RB5IA        | 110      | 15          | 0        | 0           | 4,950             |
| 16   | LZ1KBL*      | 92       | 16          | 0        | 0           | 4,410             |
| 17   | YQ9HT*       | 105      | 14          | 0        | 0           | 4,176             |
| 18   | LZ1YE        | 87       | 15          | 0        | 0           | 3,675             |
| 19   | RB5QW        | 82       | 15          | 0        | 0           | 3,465             |
| 20   | UA6LMT       | 105      | 11          | 0        | 0           | 3,420             |
| 21   | UA3TN        | 95       | 13          | 0        | 0           | 3,237             |
| 22   | U64DWA*      | 83       | 13          | 0        | 0           | 3,042             |
| 23   | RB5EG        | 78       | 13          | 0        | 0           | 3,003             |
| 24   | UB4CWW       | 77       | 13          | 0        | 0           | 2,412             |
| 25   | HA8XX*       | 47       | 7           | 20       | 5           | 2,376             |
| 26   | RW4CA        | 72       | 11          | 0        | 0           | 2,304             |
| 27   | YQ8DDP       | 64       | 12          | 0        | 0           | 2,280             |
| 28   | YQ8TE        | 78       | 10          | 0        | 0           | 2,112             |
| 29   | K2EK*        | 64       | 11          | 0        | 0           | 2,040             |
| 30   | RB5EX        | 68       | 10          | 0        | 0           | 1,808             |
| 31   | ZC4AK*       | 76       | 8           | 0        | 0           | 1,647             |
| 32   | UZ3DXW       | 81       | 9           | 0        | 0           | 1,586             |
| 33   | 3D6AK*       | 52       | 8           | 0        | 0           | 1,248             |
| 34   | JG1FVZ/5N25* | 41       | 10          | 0        | 0           | 1,230             |
| 35   | YQ4AK*       | 41       | 7           | 6        | 2           | 1,188             |
| 36   | CX6BBY*      | 38       | 7           | 0        | 0           | 1,008             |
| 37   | IK2AEQ*      | 42       | 8           | 0        | 0           | 984               |
| 38   | UB4JB        | 41       | 8           | 0        | 0           | 984               |
| 39   | UV3DN        | 41       | 8           | 0        | 0           | 945               |
| 40   | IK2AVH       | 45       | 7           | 0        | 0           | 930               |
| 41   | YU1QWW*      | 29       | 8           | 2        | 2           | 837               |
| 42   | A4XYX*       | 31       | 9           | 0        | 0           | 810               |
| 43   | OK2XA*       | 30       | 9           | 0        | 0           | 735               |
| 44   | ZS6KU*       | 35       | 7           | 0        | 0           | 702               |
| 45   | LZ1BJ        | 26       | 9           | 0        | 0           | 696               |
| 46   | OK1DKS       | 29       | 6           | 0        | 0           | 686               |
| 47   | YU2CRM       | 2        | 1           | 31       | 6           | 504               |
| 48   | IV3ANH       | 21       | 8           | 0        | 0           | 476               |
| 49   | VK6IR*       | 23       | 7           | 0        | 0           | 488               |
| 50   | UA3PB        | 26       | 6           | 0        | 0           | 450               |
| 51   | OK3ZWX       | 13       | 6           | 4        | 3           | 441               |
| 52   | UA9FM        | 21       | 7           | 0        | 0           | 408               |
| 53   | HA4XX        | 15       | 6           | 2        | 2           | 354               |
| 54   | UB4LZJ       | 20       | 6           | 0        | 0           | 345               |
| 55   | OK1KZ        | 23       | 5           | 0        | 0           | 270               |
| 56   | KJ4EX        | 16       | 6           | 0        | 0           | 258               |
| 57   | OK1TW        | 15       | 8           | 0        | 0           | 240               |
| 58   | EA4KK        | 18       | 5           | 0        | 0           | 240               |
| 59   | UM8MU        | 18       | 5           | 0        | 0           | 216               |
| 60   | G6ZY/EA6     | 12       | 6           | 0        | 0           | 198               |
| 61   | RB5QZ        | 11       | 6           | 0        | 0           | 195               |
| 62   | K3ZO         | 14       | 5           | 0        | 0           | 175               |
| 63   | UJ8JMM       | 12       | 5           | 0        | 0           | 120               |
| 64   | UA9CR        | 10       | 4           | 0        | 0           | 105               |
| 65   | PA3DJC       | 7        | 5           | 0        | 0           | 90                |
| 66   | UA6XT        | 6        | 5           | 0        | 0           | 72                |
| 67   | PA0KDM       | 3        | 3           | 0        | 0           | 27                |

\* Certificate winners

## G T Peck Memorial Trophy DF Event

Date: 13 April 1986

Map: QS Sheel 175 1:50,000 series, Reading and Windsor

Assembly: 1300bsi for start at 1320bsi

Location: Peppard Common NGR 709818

Competitors requiring tea should notify Mr C Boyce, 228 Totteridge Road, High Wycombe, Bucks HP13 7LF (Tel 0494 33647) not later than 6 April 1986.

## D F Qualifying Event—Oxford

Date: 27 April 1986

Map: QS Sheel 164 1:50,000 series, Oxford

Assembly: 1300bsi for start at 1320bsi

Location: Sholover Plain NGR 572059. Please approach from the east.

Competitors requiring tea should notify Mr P Bradley, 80 Weyland Road, Headington, Oxford OX3 8PD (Tel 0865 61808) not later than 20 April 1986.

Details of rules for RSGB Topband DF events may be obtained from: E L Mollart, G6AGE, 17 Spinfield Mount, Marlow, Bucks SL7 2JU.

## April 70MHz & SWL Contest rules

0900-1500gmi 20 April 1986

The general rules published in the "Operating Guide" supplement, *Rad Com* January 1986 will apply. There will be three sections, section F for fixed stations, section Q for other stations, and an SWL section. QTH information must be exchanged in accordance with general rule 13.

All entries and check logs to: VHF Contests Committee, c/o G M C Stone, G3FZL, 11 Liphook Crescent, Forest Hill, London SE23 3BN.

## 1-3GHz Trophy Contest rules

1600-2400gmi 31 May 1986

The general rules published in the "Operating Guide" supplement, *Rad Com* January 1986 will apply. There will be two sections, section F for fixed stations, and section Q for other stations. QTH information need not be exchanged. The VHF Contests Committee Cup will be awarded to the station with the highest overall score in the contest.

All entries and check logs to: VHF Contests Committee, c/o D A Yorke, G4JLG, 40 Edge Fold Road, Worsley, Manchester M28 4QF.

## 432MHz Trophy and SWL Contest rules

0900-1700gmi 1 June 1986

The general rules published in the "Operating Guide" supplement, *Rad Com* January 1986 will apply. There will be three sections, section F for fixed stations, section Q for other stations, and an SWL section. QTH information need not be exchanged. The 1951 Council Cup will be awarded to the station with the highest overall score in the contest.

All entries and check logs to: VHF Contests Committee, c/o D A Yorke, G4JLG, 40 Edge Fold Road, Worsley, Manchester M28 4QF.

## VHF NFD 1986 rules

As an experiment, 2-3GHz is included in this year's VHF NFD, but is combined with 1-3GHz for scoring purposes. Comments on this would be welcomed.

Stations wishing to take part in this year's VHF NFD must register their site by 2 June at the latest, see rule 2. SWL entries will be very welcome and will count towards the VHF Listener's Championship.

The general rules published in the "Operating Guide" supplement, *Rad Com* January 1986 will apply, except as modified by these rules.

1. **Duration.** 1400gmi 5 July 1986 to 1400gmi 6 July 1986.

2. **Site notification.** Each group intending to compete must send details of the site to be used to: VHF Contests Committee, c/o J H Quarmby, G3XDY, 12 Chestnut Close, Rushmore St Andrew, Ipswich IP5 7ED, to arrive no later than 2 June 1986. The details required are: the name and address of the person responsible for the entry; the name of the group; the call signs to be used on each band; the section (open or restricted); the locator and national grid reference of the site; and sufficient access information for an inspector to locate the site (preferably a sketch map). A stamped addressed postcard should be included in confirmation of receipt is required.

3. **Bands.** Up to four separate stations can be used, operating on the 70, 144, 432, 1,296MHz and 2,320MHz bands. Single-band entries for 144MHz will not be accepted. Only one station can score or give points on each band. On 70MHz stations must use CW only during the period 1400-2200gmi, phone only during the period 0600-1400gmi, and close-down between 2200-0600gmi. The same call sign must be used on 1-3GHz and 2-3GHz, with no simultaneous operation on these two bands.

4. **Operators.** Any RSGB member or group of members operating from the British Isles (excluding Eire) may enter. Groups operating from the same site may combine their scores subject to rules 3 and 5.

5. **Stations.** All the stations forming one entry must operate from within a circle of 1km radius centred on the operating position of any of the stations. All equipment, including antennas, must be installed on site not more than 24h before the contest, and the site must not be used by the entrant for transmitting activities during the five days prior to the contest. Only portable accommodation can be used to house the stations. Power for all equipment must be derived from an on-site generator or battery. The public mains supply may not be used.

6. **Scoring.** Contacts will be scored by the radial ring system. Scores from the two 70MHz sessions will be added to give the final 70MHz score. Scores on 1-3GHz and 2-3GHz will be added together to give a final microwave score. The overall score will be determined as per general rule 10 using the final 70MHz, 144MHz, 432MHz, and microwave scores.

7. **Contest exchanges.**

(a) On 70MHz the contest exchange must include the QTH, given in a different form in each session. Serial numbers start from 001 in each session, and one scoring contact can be made with a given station in each session.

(b) On 144, 432, 1,296, and 2,320MHz, QTH information need not be exchanged. One scoring contact can be made with any given station on each band.

(c) Contacts with stations whose call signs appear on any of the group's cover sheets will not count for points.

8. **Sections.** There will be two sections:

(R) **Restricted section:**

(i) The power output on any band must not exceed 25W p.e.p. at the transmitter.

(ii) The height of any antenna must not exceed 10m above ground level.

(iii) Only one antenna per band may be used (eg no stacked, bayed or collinear arrays, or switching between two or more antennas). A slot fed Yagi or Quad antenna is permitted. Dish or Backfire antennas must not exceed 2m diameter.

(O) **Open section:** as per licence.

9. **Inspections.** All stations are subject to inspection by members of the VHF Contests Committee or nominated representatives. Should the inspector be unable to locate site due to inadequate or incorrect information, the entry will be disallowed. In the event of a last minute change it is the responsibility of the group to make suitable arrangements for the inspector to find the site. The inspector must be given immediate access to all parts of the site with the right to stay as long as desired, and the ability to return at any time during the contest.

10. **Entries.**

(a) All entries must be postmarked no later than 28 July 1986.

(b) Entries must be addressed to: VHF Contests Committee, c/o J H Quarmby, G3XDY, 12 Chestnut Close, Rushmore St Andrew, Ipswich IP5 7ED.

11. **Awards.** The Surrey Trophy will be awarded to the overall winner of the open section, the Arthur Walls Trophy to the overall winner of the restricted section, the Taran Trophy to the leading Scottish entry, and certificates will be awarded to the winners and runners up on all bands in each section, and to the leading stations in each country.

## Contests Calendar

1 Jan-31 Dec

1 April

5, 6 April

6 April

13 April

13 April

20 April

20 April

26, 27 April

27 April

May-Sept

May-Sept

1 May

3, 4 May

5 May

10, 11 May

17, 18 May

18 May

18 May

31 May

1 June

7, 8 June

15 June

28, 29 June

29 June

5, 6 July

5, 6 July

12, 13 July

13 July

20 July

26 July

27 July

3 August

3 August

17 August

24 August

31 August

6, 7 September

6, 7 September

7 September

13, 14 September

21 September

21 September

4, 5 October

7 October

12 October

15 October

19 October

23 October

26 October

28 October

31 October

1, 2 November

8 November

8, 9 November

9 November

16 November

24 November

2 December

7 December

10 December

14 December

18 December

UBA SWL (Rules in December SWL News)

BATC April Fools Fiesta (Details G6IQM)

SP DX (Rules in March HF)

432MHz CW (Rules in February Issue)

Ropoco 1 (Rules in March Issue)

GT Peck Memorial Trophy DF Event (Details in this issue)

70MHz and SWL (Rules in April Issue)

Low Power Fixed (Rules in February Issue)

Helvella (Rules in April HF)

DF Qualifying Event, Oxford (Details in this issue)

Microwave Cumulatives (Rules in March Issue)

10GHz Cumulatives (Rules in March Issue)

AGCW-DL ORP/IRP Party (Rules in March QRP)

432MHz-24GHz (Rules in March issue)

BATC Mayday Microwave (Details G6IQM)

Peace to the World (Rules in April HF)

144MHz and SWL (Rules in March issue)

DF Qualifying Event, Chelmsford/Colchester

Region Round-up (Rules in March issue)

1-3GHz Trophy (Rules in April Issue)

432MHz Trophy and SWL (Rules in April issue)

HF NFD (Rules in February Issue)

DF Qualifying Event, Northampton

Summer 1-8MHz

DF Qualifying Event, Darford Heath

VHF NFD and SWL (Rules in April issue)

BATC Summer Fun (Details G6IQM)

HF SWL

DF Qualifying Event, South Manchester

Low Power FD

144MHz Low Power and SWL

432MHz Low Power and SWL

DF Qualifying Event, Mid-Thames

Hopscolch

DF Qualifying Event, Coventry

1,296/2,320MHz

Ropoco 2

144MHz Trophy and SWL

IARU Region 1 SSB FD

DF Qualifying Event, Slade

BATC International (Details G6IQM)

70MHz Trophy and SWL

DF National Final, Salisbury

432MHz-24GHz

432MHz Cumulative

21/28MHz SSB

1,296/2,320MHz Cumulative

21MHz CW

432MHz Cumulative

70MHz Fixed

DF Treble Night Event, Mid-Thames

1,296/2,320MHz Cumulative

144MHz CW

432MHz Cumulative

Second 1-8MHz

BATC Autumn Vision (Details G6 IQM)

1,296/2,320MHz Cumulative

432MHz Cumulative

1,296/2,320MHz Cumulative

144MHz Fixed and AFS

432MHz Cumulative

70MHz CW

1,296/2,320MHz Cumulative



# Club News

The following is the latest information received by RRs from RSGB affiliated societies, clubs and groups in time for inclusion in this issue. Basic unchanged information on other affiliated organizations will be published again in July 1986.

RSGB affiliated organizations are requested to report all programmes and new items to their regional representatives regularly. Information for inclusion in the June issue should reach them by 12 April and for the July issue by 10 May.

Club programmes are given in order of date, subject, time and place of meeting. All callsigns of club secretaries and other contacts are OTHR (correct in the current RSGB Call Book) unless otherwise stated.

All clubs welcome visitors and would be pleased to hear from potential new members.

**REGION 1—RR B Donn, G3XSN, 7 Thume Way, Liverpool L25 4SQ. Tel 051-722 3644.**

**Ainsdale (AARC)—**8 April (Natter night in lounge), 22 April ("Traction supplies", G4SBE). 8pm. The Carlton Hotel, Lord St, Southport. Sec G4YV, tel Southport 79825.

**Barnoldswick (Rolls-Royce ARC)—**2 April (Talk by G3ATH), 7 May (Foxhunt), 8pm. Rolls-Royce Sports & Social Club, Barnoldswick, Sec G4LIG, tel 0282 812288. NB The Rally, 3 August 1986. Sports & Social Club. Free entrance and car park. **Berrow (South Lakeland ARS)—**3 April (Club night), 17 April ("Musical synthesis", G6YIT). 8pm. Norweb Sports & Social Club, rear of Ormsall Hotel, Sec G6LKB, tel 0229 54982.

**Burnley (B&DARC)—**Meetings alternate Mondays, 7pm. The Adult Education Centre, School Lane, Burnley. RAE and Morse classes each week. Sec G6BOC, tel 0282 39765.

**Bury (BRS)—**8 April ("Fibre-optic transmissions", G4KLT). 8pm. The Mosses Youth & Community Centre, Cecil St, Bury. Details G0CUK, tel Bolton 706191.

**Chester (C&DRS)—**8 April ("Power supplies", G3EON), 15 April ("Oscillators", G3SES), 22 April ("Introduction to microwaves", Mike Dixon, G3PFR), 29 April (Your questions answered). Morse classes, 7.15pm. Main meeting, 8pm. Chester RUFC, Hare Lane, Vicars Cross, Chester. Details G6IFA, tel 336639.

**Crewe (South Cheshire ARS)—**14 April (Talk on Amsal and Oscar 10), 8pm. NB new OTH Crewe LMR Sports Club, Goddard Street, Crewe. Details G1PUV.

**Fylde (FARS)—**1 April ("Building a simple receiver", G3AEP). 15 April (Informal with Morse), 7.45pm. The Kite Club, Blackpool Airport. Sec G8GG, tel 725717.

**Liverpool (L&DARS)—**1 April (AF 577), 8 April (CEPO), 15 April (Jim Rennie, G3XCP), 22 April (IMM), 29 April (G4GHS talks on his USA trip), 8pm. The Churchill Conservative Club, Church Rd, Liverpool 15. Sec G1EXJ, tel 051-728 8811. The society also holds Morse and RAE classes starting 7pm as above.

**Macclesfield (M&DRS)—**1 April (Shack night), 5/6 April (Coach trip to NEC), 6 April (432MHz CW Contest participation), 8 April (Visit by B Donn, G3XSN, RSGB Region 1 representative), 15 April (Committee meeting and shack night), 20 April (3-5 and 7MHz Low Power Fixed Contest participation), 22 April (Manchester Airport Control Tower tour), 29 April (Talk by G0DMU, tba), 4 May (WAB LF Phone Contest), 8pm. The Fernhill Club, Oxford Rd, Macclesfield. Sec G1NUS, tel 0625 24534. **Manchester (Trafford ARC)—**17 April ("Valves & antique rigs", Peter Kirsop). 8pm. TS de Trafford, The Sea Cadet Corps, Bradshaw Lane, Stretford, Manchester. NB new premises. Sec tel 061-748 9804.

**Manchester (West MRC)—**Wednesdays, 8pm. Asley & Tyldesley Miners Welfare, Meanley Rd, Gin Pit Village, Asley, Tyldesley, Nr Manchester. NB 17 August, Red Rose Rally, Haydock Park Racecourse. 23 November, Mobile Rally, Pembroke Halls, Walkden, Gt Manchester. Details G1IOO or evenings 0204 24104.

**Maryport (The Solway RC)—**Meetings every Wednesday night at Maryport Educational Settlement, High St, Maryport. Contact G0AFP, tel Conkermouth 826461.

**Sale (South Manchester RC)—**4 April (Mystery lecture by G8TYY), 11 April ("Antennas", G2JT), 18 April (Homebuilt equipment contest), 28 April ("Using and abusing the 4CX250B", G4FRX), 2 May (Club project courtesy of G4AOU). 8pm. Sale Moor Community Centre, Norris Rd, Sale. Sec G3WFT, tel 061-973 1837.

**Skelmersdale (S&DARC)—**3 April (Club project), 10 April ("Tech Tips", G6HXL), 17 April (Club project), 24 April ("Tanks a lot", G1OKW). 8pm. The Beacon Park Centre, Dalton Lane, Skelmersdale. Contact G4ZPY, tel 0704 894299.

**Southport Raynet (G1SRG)—**First Wednesday of each month, 8pm. Carlton Hotel, Lord St, Southport. Group controller G4ROX, tel 25172.

**Stockport (SRS)—**9 April (TBA), 16 April (Informal), 23 April (Natter night), 8pm. The Magnol Inn, Wellington Rd (A6), Stockport. Sec G4FFW, tel 061-224 7880.

**Thomton Cleveleys (TCARS)—**7 April (Lowe Electronics—talk and demonstration of equipment), 14 April (Informal/club on air), 21 April ("Legal aspects of amateur radio", G1MET), 28 April (Informal/club on air), 5 May (Bank Holiday—no meeting), 7.45pm. 1st Norbreck Scout HQ, Carr Rd, off Fleetwood Rd, Bispham, Blackpool. Sec G4BFH, tel 0253 853554. New Morse classes now running, tutor G3ZRZ.

**Warrington (WARC)—**1 April (AGM), 8 April ("RaynetCares", G8NRF), 15 April ("Amateur tv", G6AWD), 22 April (Annual quiz competition versus Bury ARC with 1v and 144MHz links), 7.30pm. Grapenhall Community Centre, Bell House Lane, Warrington. Details G Wood, tel 0925 8420.

**Wigan (Douglas Valley ARS)—**17 April ("Amateur radio on a shoestring", Rev Dobbs, Admission by ticket only from G4GWW, tel Wigan 211397). 8.30pm. Shevington Conservative Club, Shevington, Wigan. Sec G4XMG.

**Wirral (WARS)—**2 April ("Principle of prevention and extinguishing fire", G6MRG), 16 April ("Workshop practices", G3PYU), 7 May ("RSGB affairs", Bert Donn, G3XSN, Region 1 representative), 8pm. The Clubroom, Ivy Farm, Arrowe Park, Sec G3VEB.

**Wirral (W&DARC)—**9 April (Talk on skydiving), 23 April (St George's Day night on the air, with callsign G82WDC). 8pm. Irby Cricket Club, Mill Hill Rd, Irby. Details G6CGJ, tel 051-677 7376.

This year I have arranged to visit the following clubs: Ralec, Leyland 100, Macclesfield & DRS, Isle of Man ARS, Wirral ARC, Morecambe Bay ARS, Carlisle ARS and Bolton & DARS. RR1.

**REGION 2—RR P R Sheppard, G4EJP, 9 Elvington Crescent, Leconfield, Beverley, N Humberside**

**HU17 7LX. Tel 0401 50397.**

**Goole (GR & ES, G8HSG)—**4 April (Natter night), 11 April (HF operating evening), 18 April (DF evening), 25 April (Constructors' Trophy evening), 7.30pm. The Pavilion, West Park, Details G6REL. **Hallifax (H & DARS, G2UG)—**15 April ("Radio in the RNSCC", G4SCC), 7.30pm. The Running Man PH, Pellon Lane. Details G0DLM, tel 0422 202306.

**Hull (H & DARS, G3AMW)—**4 April ("Basic antenna Pt 2", G3RDM), 11 April (Quiz, round 5 with G0DMP), 18 April ("Technical video", G4VSP), 25 April (Spring used-equipment sale), 2 May (Natter night). The Clubroom, Wallon St. NB new sec, G0DMP.

**Leconfield (RCT ARS, G4GGD)—**3 April (Contest equipment review), 10 April (The cw OSO), 17 April (Wine as a hobby), 24 April (The phone OSO), 8 May (Contest working), 7.30pm. Normandy Barracks. NB new sec G4SMB, tel 0401 51200. Morse classes each Thursday.

**Leeds (L & DARS, G4LAD)—**21 April (Life with a guide dog). Yarnbury Rugby Club, Brownberrie Lane. Details G1EBS, tel 0274 665355.

**Malby (MARS, G4SKM)—**4 April (AGM), 11 April ("Amateur tv", G6OYL), 7.30pm. NB new venue, The Community Hall, Clifford Way, Hellaby. Details G3ZHI, tel 0709 814911.

**Mexborough (M & DARS, G4BTS)—**Fridays, Harrop Hall, Dolcliff Rd. Details G1BJB, tel 0709 586239.

**North Wkefield (NWRC, G4NOK)—**3 April ("Slow scan", G4FBA), 10 April (On the air), 17 April (Natter night), 24 April (Monthly meeting), 1 May ("Crime prevention", Morley CPO), 8pm. White Horse PH, Fall Lane, East Ardsley. Details G4RCH, tel 0532 536633.

**Pontefract (P & DARS, G3FYO)—**3 April (Committee meeting), 4 April (Ceildh), 10 April (Visit to British Telecom), 17 April (Raynet group agm), 24 April (Project evening). Carleton Community Centre. Details G0AAO, tel 0977 43101.

**Ripon (R & DARS, G4SJM)—**Thursdays, 7.30pm. St John Ambulance Hall, North Rd. Details Liz Bulman, The Lodge, Lister House, Sharrow.

**Sheffield (SARC)—**7 April ("UHF propagation", G1JAJ), 17th Clock Tower. Details BRS86758, tel 0742 581766.

**Spenn Valley (SVARS, G3SVC)—**3 April (Prelim agm), 17 April (AGM), 1 May ("Amateur radio from a different world", G4GJV). Old Bank WMC, Millfield. Details G4PHR, tel 0924 499397.

**Todmorden (T & DARS)—**7 April (Talk by UK Atomic Energy Authority), 21 April (Informal chat night). Queen Hotel. Details G1GZB, tel 070681 7572.

**UK FM Group (Northern)—**6 April (Visit by RR2, G4EJP), 4 May (Monthly meeting). Royal Hotel, Barnsley. Details G4UNA.

**White Rose (WRARS, G3XEP)—**2 April (Video satellite comms). Moortown RUFC, Moss Valley, Kings Lane. Details G6NIZ.

**York (YARS, G3HWW)—**18 April (Homebrew night). Unilever Services Club. Details G3WVO.

**REGION 3—RR G Ross, G8MWR, 81 Ringwood Highway, Coventry CV2 2GT. Tel 0203 616941.**

**Altherstone (ARC)—**14 April ("POW camp radio", G3BA), 28 April ("Amor", G3WHO). Sixth Form College, Long St, Altherstone. Sec G6YOV, tel Chapel End 393518.

**Bromsgrove (BARS)—**8 April (Surplus sale), 22 April (Open meeting), 8pm. Hundred House, Stourbridge Rd, Bromsgrove. Sec G4LVK.

**Coventry (CARS)—**4 April (VHF NFD), 11 April ("Operating techniques", G3BA), 18 April (Night on the air), 25 April (144MHz dl contest), 8pm. 121 St Nicholas St, Radford, Coventry. Sec G4JDO, tel 739999.

**Dudley (DARC)—**24 April ("Back garden antennas", G3BA), 7.45pm. Allied Centre, Greenman Alley, Tower St, Dudley. Sec G4NRA, tel 0384 278300.



The president of the Hellfax & DARS, Arthur Wood, G3XG, (L) presenting an engraved tankard to the Rev Hubert Makin, G4FDC, a founder member of the society, in appreciation of his services to amateur radio, having taught RAE courses at the local college since 1950.



**Halesowen (MEB RC)**—8 April ("AR in S Africa", G4UFM), 22 April (AGM), 8pm, MEB Social Club, Mucklow Hill, Halesowen. Sec G4RWH, tel 021-747 8784.

**Hereford (HARS)**—4 April (Construction contest), 18 April (Informal evening), 8pm, Civil Defence HQ, Goal St, Hereford. Sec G3WRO, tel 0432 54064.

**Kidderminster (KARC)**—1 April ("Radio regulations", G4PZA), 9 April (Committee meeting), 15 April (Night on the air), 29 April ("Amlor", G3WHQ), 8pm, Vice-President's Club, Harriers FB Ground, Hoo Rd, Kidderminster. Sec G8WOX, tel 0562 751584.

**Midland (MARS)**—15 April ("50 years of amateur radio", G3BA), 11th 5, Henstead Hse, Henstead St (off Bromsgrove St), Sec G8BHE, tel 021-422 9787.

**Moorlands (MARS)**—24 April (AGM), Ex-Service Centre, Bank St, Cheadle. Sec G4QUQ, tel 0538 756323.

**Redditch (RARC)**—10 April (Morse practice), 24 April (Natter night), 8pm, WRVS Centre, Ludlow Rd, Redditch. Sec G3EVT, tel 0789 762041.

**Salihull (SARS)**—17 April ("Transmission lines", G3NXC), The Shirley Centre, Stratford Rd, Shirley. Sec G8AYY, tel 021-783 2996.

**Stone (Brit Tel ARS)**—1 April ("Anything might happen"), 8 April (Activity night), 15 April ("50MHz operation", G8SXL), 24 April (Foxhunt), 7.30pm. The College, Sec G8ATB, tel 0785 762593.

**Stratford-Avon (SuA ARC)**—14 April (Electronic building blocks), 28 April ("SWR", G3PGQ), 7.30pm, Baptist Church, Payton St, Stratford-Avon. Sec G8OVC, tel 750584.

**Sutton Coldfield (SCRS)**—14 April (Field-day discussion), 28 April ("Fault-finding", G4BCN), 7.30pm, Public Library, Selsbury Centre, Sutton Coldfield. Sec G4MFN, tel Tamworth 282360.

**Wolverhampton (WARS)**—1 April (Discussion night), 8 April ("Home comping", G3KQJ), 12 April (Open evening), 15 April (Visit to Eddystone Radio), 22 April (Committee meeting), 27 April (144MHz dx hunt), 29 April (Night on the air), 8pm, Electricity Sports Club, St Marks Rd, Chapel Ash, Wolverhampton. Sec K Jenkinson, tel 0902 24870.

**Worcester (WARC)**—7 April (Construction contest), 18 April (Natter night), 8pm, Oddfellows Club, New St, Worcester. Sec G4RBD.

**REGION 4—RR M Sherdlow, G3SZJ, 19 Portreth Drive, Darley Abbey DE3 2BJ.**  
Tel Derby (0332) 556875.

**Derby (DADARS)**—2 April (Junk sale), 9 April ("Meteor scatter", G4UIG), 16 April (Technical topics), 23 April (Video show), 30 April ("Enamelling", B Nell), 7 May (Junk sale), 7.30pm, 119 Green Lane, Derby. Sec G4EYM, tel 556875.

**Leicester (LRS)**—7 April (VHF contest seminar), 14 April (Activity night), 21 April (Constructors' Contest), 28 April ("Equipment for 1.296MHz and above", G8LMW), 5 May (Activity night), 7.30pm, Gilroes Cottage, Groby Rd, Leicester. Sec G4PDZ, tel 0533 871086. Sunday meetings have been cancelled.

**Lincoln (LSWC)**—2 April (Activity night), 6 April (Committee meeting), 9 April (So you want to build a shack?), 16 April (Activity night), 23 April ("HF antennas", G4QQ), 30 April (Activity night), 4 May (Committee night), 8pm, City Engineers Club, Waterside South, Lincoln. Sec G4STO, tel Gainsborough 788356.

**Mellon Mowbray (MMARS)**—18 April (Construction Contest), 7.30pm, St John Ambulance Hall, Asfordby Hill, Mellon Mowbray. Sec G3NVK, tel 63369.

**Nottingham (ARCON)**—3 April (AGM), 10 April (10GHz update), 17 April (Night on the air), 24 April (Packet radio), 1 May (23cm talk), 7.30pm, Woodthorpe House, Mansfield Rd, Sherwood, Nottingham. Sec G4JAE, tel 232604.

**Workop (WARS)**—8 April ("VHF then and now", and "The RSGB awards system", G5UM), 7.30pm, The Malkins, Galeford Rd, Workop. Sec G4ZUN, tel Workop 486614.

**REGION 5—RR J S Allen, G3DQT, 77 Rosslyn Crescent, Luton LU3 2AT.**  
Tel 0582 508515 or at work on 0582 21151.

**Daventry (DARC)**—This club is looking for new premises, but in the meantime meetings are being held on the first Thursday of each month at the Raynet Control Centre. April meeting (QRP demonstration). The sec has now passed his Morse test and his new call sign is G0DPA.

**Dunstable (D Downs RC)**—11 April ("Spectrum checklog program demo", G3XJO), 25 April (DF hunt), 8pm, Meeting Room 3, Chews House, High Street South, Dunstable. Sec G6EES, tel Dunstable 607623.

**Millon Keynes (MK&DARC)**—14 April (SWL activity night), Sec G3ZPA, tel 501310.

**Nene Valley (NVRC)**—NB new venue, Prince of Wales PH, Well St, Finedon, Northants. Sec G6UWS, tel Wellingborough 71189.

**Northampton (NRC)**—3 April, (Construction evening judging, G3VMU), 10 April (VHF contest—how it all went, Contest Committee), 17 April, ("Microwaves", G8MWR), Sec G4YJP.

**Peterborough (P R&EC)**—4 April, (Junk sale, Scout Hut, Occupation Rd, Peterborough. Talk-In S22, 7.8pm. Traders, light refreshments), 14 April (Sale/illie IV, Q & A session, Werrington District Library, Staniland Way, Werrington, Peterborough), 16 May (DF hunt, meet at Brook St, 7.30pm), Sec G4PNW.

**Sheffield (S&DARS)**—10 April (RSGB interference forum), 24 April (Computer communication), Sec G4PSQ, tel Hillclim 57946.

**Wilsbech (W&DARC&EC)**—NB new venue, Astral Hse, Old Market, Wilsbech, Cambs.

**REGION 6—RR F S G Rose\*, G2DRT, 84 Cock Lane, High Wycombe, Bucks HA3 7EA.**  
Tel Penn (049481) 4240.

\* Acting until post is filled.

**Oxford (RAFARS)**—Third Wednesday, odd numbered months. Monthly net 3.710kHz ssb, 11.30am, second Sunday of each month, 14 May (Visit to London Air Traffic Control Office. All attending please advise G0BDD, tel 0491 37452). Civil Service Club, Marston Rd, Oxford. Details G6ZH, tel 0491 651259.

**Oxford (Q&DARS)**—The society's agm was held on 22 January 1986. Election results as follows: president, Robin Pierce-Boby, G3JLE; chairman, Philip Edwards, G6MKK; hon sec, Cyril H May, G4PUU; program sec, Philip Edwards, G6MKK; committee, G4KSO, G8PX, G8IB, G4SOI, G4GKL; junior committee, G1OBS; auditor, Barry Crook, G4AZM. Club meetings, second and fourth Wednesday in each month, 7.45pm. Civil Service Club, Marston Rd, Oxford. Details G4PUU, tel 52859.

**Reading (RADAC)**—Please contact new sec G6BQX.

**Slough (Burnham Beeches RC)**—7 April (TBC), 21 April (Power supplies), 3/4/5 May (Spring dx picnic), 8pm, Haymill Youth & Community Centre, 112 Burnham Lane, Slough. Details G6ELI, tel Maidenhead 25720. NB McMichael '86 Mobile Rally, 20 July.

**REGION 7—RR R Sykes, G3NFV, 16 The Ridgeway, Fetcham, Leatherhead, Surrey KT22 9AZ.**  
Tel 0372 372587.

**Ashford (Echelford ARS)**—14 April (AGM), 24 April ("Receiver parameters", G3MCK), 8pm, The Hall, St Martin's Court, Kingsdon Crescent, Ashford, Middx. Sec G4VAZ, tel Sunbury 83823.

**Bexleyheath (North Kent RS)**—15 April (AGM), 8pm, The Pop-In Parlour, Graham Rd, Bexleyheath. Sec G6CUE, tel 01-309 7214.

**Cray Valley (CVRS)**—17 April (AGM), 1 May (Surprise evening, G3XMD), 8pm, Progress Hall, Admiral Seymour Rd, Eltham SE9. Details G3TAA.

**Croydon (SRCC)**—7 April (AGM), 8pm, TS Terra Nova, 34 The Waltons, South Croydon, Surrey. Sec G8IYS, tel 01-657 0454.

**Crystal Palace (CP&DRS)**—19 April ("Solar cycle 21", G2FKZ), 8pm, All Saints Parish Room, Upper Norwood SE19. Sec G3FZL, tel 01-699 6940.

**Redhill (RATS)**—15 April (AGM), 8pm. Constitutional & Conservative Club, Warwick Rd, Redhill. Sec G8JXV.

**Sutton and Cheam (S&CRS)**—18 April ("The 50MHz band", G5KW), 8pm, Downs Lawn Tennis Club, Holland Ave, Cheam, Surrey. Sec G4BOX.

**Thames Ditton (TVARTS)**—1 April (Surplus equipment auction), 6 May ("EMC", G3AEZ), 8pm, Thames Ditton Library, Walts Rd, Giggles Hill, Thames Ditton. Sec G3ENI.

**Wimbledon (W&DRS)**—11 April ("Electric shock", G3ESH), 25 April ("Solar cycle 21", G2FKZ), 8pm, St John Ambulance HO, 124 Kingston Rd, Wimbledon SW19. Sec G3DWW, tel 01-540 2180.

**REGION 8—RR M Elliott, G4VEC, 20 Haysel, Sillingbourne, Kent ME10 4QE.**  
Tel 0795 70132.

**Crawley (CARC)**—23 April ("Antennas", G3TNO), 7.30pm. NB new venue, Crawley Leisure Centre, Hasell Ave, Crawley. Sec G4IQM, tel 882641.

**Eastbourne (Southdown ARS)**—5 April (Activity weekend, to celebrate anniversary of clubroom opening), 7 April ("Linear amplifiers", Ken Willis, G8VR), 5 May (Foxhunt with HERC), Mondays, 7.30pm, Chaseley Home, South Cliff. Tuesdays

and Fridays, 7pm, Hailsham Leisure Centre, Vicarage Lane, Hailsham. Sec G4XNL, tel 638653.

**Gillingham (Bredhurst R&TS)**—3 April ("Active fillers", G4EGH), 17 April ("Repeaters", lecture by KRQ), 8pm, Parkwood Community Centre, Parkwood Green, Rainham, Gillingham. Sec G4ZTF, tel Medway 374670.

**Hastings (HERC)**—16 April (Junk auction), 7.45pm, West Hill Community Centre. Sec G4NVO, tel 420608.

**Horsham (HARC)**—3 April ("Mechanical IV", G3PVH), 1 May ("Data basis", G3IEE), 7.30pm, Guide HQ, Denne Rd, Horsham. Sec G4YFY.

**Maldstone (MYMCAARS)**—4 April ("Chassis bashing", G3REM), 18 April ("Contest operating", G3QRP), 8.30pm, YMCA Sports Centre, Melrose Close, Cripples St, Maldstone. Sec G4AXD, tel 0622 29462. RAE classes 11 and 25 April, 8.30pm.

**Swanley (Darent Valley RS)**—Wednesdays, twice monthly, 8pm, Crookenhill Village Hall, Nr Swanley. NB new sec, L F W Thomas, tel 0322 63368.

**Tunbridge Wells (West Kent ARS)**—18 April (AGM), 2 May (Construction contest), 8pm, Adult Education Centre, Annex, Quarry Rd, Tunbridge Wells. Sec G4KIU, tel 33585.

**REGION 9—RR A H Hammett, Rosehill, Ledock, Truro, Cornwall TR2 4PQ.**  
Tel 0726-882 758.

**Cornwall Reynel**—Keith Harding, G3XFL, has been elected as county controller. The Truro area group controller's post is now vacant.

**Cornwall (Mid-Cornwall Beacon and Repeater Group)**—GB3NC and GB3HB are now both operational from the new site.

**Plymouth (PARC)**—7 April ("The RSGB and future events", G3VWK), 7.30pm, Plymouth Albion RFC, Beacon Park, Peverell, Plymouth. Sec G4SCA, tel 0752 337980.

**Redruth (CRAC)**—3 April (AGM), 14 April (Computer section, speech and music on the computer), 21 April (Constructors evening), 1 May (General meeting), 7.30pm, Treleigh Church Hall, Treleigh, Old Bypass, Redruth. Assisi sec G4RVP.

**Selfish (S&DRS)**—4 April ("The history of the internal combustion engine", E T Barwell-Jones), 18 April (Visit to place of interest, details tba), 2 May ("DX tv", an illustrated talk, R Roper), 7.30pm, Burralton Town Hall, Warralton Rd, Sallash. Sec G0AKH.

**Torbay (TARS)**—26 April (AGM), 7.30pm, ECC Social Club, Highweek, Newton Abbot. Sec M K Walte.

**REGION 10—E J Case\*, GW4HWR, 2 Abbey Close, Tyrlhw, Taliswal, Mid-Glem, CF4 7RS.**  
tel 0222 810368.

\* Acting until post is filled.

**Abergenny (A&NHARC)**—3 April (Video night). This will be repeated every first Thursday in each month. Morse classes every week on club nights. The club is a registered examination centre for the RAE in May 1986, 7.30pm, Pen-Y-Fal Hospital. Sec GW4XQH, tel 0873 4655.

**Cardiff (CRSGBG)**—14 April (The first of a series of four lectures on antennas. Lecture 1, "Fundamentals", GW6MNC), 7.30pm, Pantmawr Hall, Tyle Teg, Pantmawr Estate, Whitchurch, Cardiff. Sec GW0CUM, tel Cowbridge 3212.

**Cardiff (S E Wales Repeater Group)**—A new group operating GB3SG, 432MHz, and GB3VG, 1.3MHz repeaters. 13 April (AGM), 2.30pm, Eastern, Cyncoed. Details GW6CUR, tel 0222 488722.

**Llanelli (LARS)**—Meeting dates given in January issue were incorrect. Second and fourth Mondays in each month. 14 April (AGM), 7.30pm. Next RAE course commences 18 August, first lesson 24 August. Fee £6.50. Current pass rate is 95.58 per cent. All meetings at DDA Hall, Albert St, Llanelli. Contact GW1MGW, 1 Maesllr, Felinfoel, Llanelli SA15 3NS.

**Pembroke (P&DRAC)**—This club is celebrating its 25th anniversary by awarding a certificate to any amateur radio station that works the club call sign GW2OP, GW2OP/A plus five members of the club on any band, commencing 1 April 1986. The event will run for one year. Meetings last Friday in the month, 7.30pm and a mid-monthly meeting, Sunday, 2pm. Delencible Barracks, Pembroke Dock. Sec D J Workman, GW6EHC, 103 High St, Pembroke Dock, Dyfed SA72 6PE. Tel Pembroke 686532.

**Rhondda (PARC)**—3 April (Clubs get together), 17 April (Meeting/natter night), 1 May (Noise bridge talk, GW4NOS), 7.30pm, National Union of Mineworkers' Club, Tonypandy. Sec GW4BUJ, tel Tonypandy 432542.

REGION 11—RR B H Green, GW2FLZ, 1 Clwyd Court, Ten-y-Bryn Road, Colwyn Bay, Clwyd LL28 4AH. Tel 0492 49288.

Bangor (Dragon ARC)—First and third Monday of each month. Bangor Rugby Clubhouse. NB new sec Mr W Williams, 31 Ty Groes Estate, Llanfair PG, Anglesey, Gwynedd LL61 5JR.

Colwyn Bay (Conwy Valley ARC, GW6TM)—10 April (Talk by Dr O Last), 24 April (Open meeting), 15 May (Foxhunting). 8pm. Green Lanes Hotel, Bay View Rd, Colwyn Bay. Sec GW4VWV, tel 0492 636376.

Deeside (Alyn & DARS)—7 April (Indoor df hunt), 14 April (AGM), 28 April (Open meeting). 8pm. Shotton Social Club, Shotton Lane, Deeside. Sec GW11LZ.

Dolgellau (Meirion ARS)—3 April (Meeting), 1 May (Meeting). NB new sec GW3KOR.

Holyhead (H & DARS)—13 April (Quiz and social visit by Bangor Radio Club), 27 April (Lecture by the section officer of the local Coastguard), 11 May ("Construction"), lecture and demonstration, GW4WIZ. 8pm. Foresters Arms, Kingsland, Holyhead. Sec B Anzani, 12 London Rd, Holyhead. Tel 0407 50577.

Porthmadog (P & DARS)—18-20 April (Special event station to commemorate the 150th anniversary of the Ffestiniog Railway), 15 May (Ladies night). 8pm. Harbour Cafe, Ffestiniog Railway, Porthmadog. Sec GW4WKO, tel 0758 740445.

Rhyl (R & DARC, GW4ARC)—7 April (Activity night), 21 April (TBA), 5 May (No meeting), 7.30pm, 2nd Rhyl Scout HQ, Vate Rd, Rhyl. Sec GW8OYT, tel 0745 37284.

Wrexham (WARC)—2 April (DF hunt on 144MHz), 16 April (Visit to British Aerospace; meet at 6.55pm by security gate. Number restricted to 25 over 14yrs of age). 7pm. Friends Meeting House, Holt Rd, Wrexham, Clwyd. Sec G4HRH, tel 0948 5181.

REGION 12—RR M R Hobson, GM8KPH, 17 Well Bree, Pitlochry, Perthshire PH16 5HH. Tel 0796 2140

Aberdeen (ARC)—4 April (Junk sale), 11 April ("Gelling set" concrete techniques etc), GM0COV, 18 April ("Keeping it up", GM0CQV), 25 April (How to fix your tv), 2 May (Junk stall), 7.30pm, 35 Thistle Lane, Aberdeen. Sec GM4GXD, tel Pitcapple 251.

Dundee (Kingsway Tech ARC)—No meetings on the 1 and 8 April as the college is closed. 29 April (Antennae for dx—video), 13 May (Aurora—the cause, part 1), 7.30pm. Kingsway Tech Annex, Grayham St, Dundee. Sec GM4WEO, tel 0382 552362. The homebrew section will meet on alternate Tuesdays.

Raynet—The annual Raynet Symposium is being held on 3 May, Strathpey Hotel, Aviemore Centre, at 10am. The theme will be communications and co-ordination, and the speakers include Gool Griffiths, Raynet Committee chairman. Details GM3RFA, tel 0397 3833.

REGION 13—RR A J Scott, 2 Manderston Grove, Duns, Berwickshire TD11 3PP. Tel 0361 83221.

Border (BARS, GM0BRS)—4 April (Visit to RAF Boulmer—Air Sea Rescue), 18 April ("SSTV—weather sat", GM8JFE), 7.30pm. Tweedview Hotel, Berwick. Sec GM1IRN, tel 0289 82491.

Dunfermline (DRS, GM3IDS)—3, 10, 17, 24 April (Meeting). 7.30pm. Club OTH, Knockhill by Dunfermline. Contact GM4WYR, tel 0383 736401. Geeshiels (GM3YEO)—9 April, ("Satellites", GM0BPY), 23 April ("Compuling", S Haslie), 7.30pm. Focus Centre, Galashiels. Sec GM0AMB, tel 0896 55569.

Glenrothes (GM4GRC/GM3ULG)—2, 11, 18, 20, 23, 30 April (Meeting), 7.30pm. Club QTH, Provosts Lane, Leslie, Fife. Details GM4TNP, tel 0592 755958. Club is also busy planning for the Scottish Convention '86, provisionally set for 13 September.

Kelso (KARS, GM4KHS)—7, 14, 21, 28 April (Operating nights). Abbey Centre OTH. Sec GM3VLB, tel 0573 24664. Also planning for 3rd Anglo Scottish Rally, Sunday 4 May, Kelso.

Leith (L Nautical College AR/Ellectronics Club, GM4AXG)—Tuesdays (Construction evenings). 5-7pm. Room T2-4. Details GM4SGB, 24 Milton Road East, Edinburgh. This club is open to past/present students and staff.

Lothians (GM3HAM)—9 April (DF construction competition/rig checking), 23 April (HF/VHF operating night, courtesy of GM4BYF). 7.30pm. Harwell

House Hotel, Elrick Rd, Edinburgh. Sec GM4YPL, tel 0506 890177.

Scotish Borders Repeater Group (SBRG GB3BT, GB3SB, GB3HK)—13 April (AGM). 2.30pm. Focus Centre, Galashiels. Sec GM4BDJ, tel 0541 80018.

REGION 14—RR T G Wylie, GM4FDM, 3 Kings Crescent, Elderslie, Stirlingshire PA5 9AB. Tel Johnstone (0505) 22749.

Glasgow (WOSARS)—4 April ("Hoy there", illustrated talk on an expedition to Orkney, GM4NUN), 18 April ("Regional roundup", GM4FDM, Region 14 representative). Details GM0DZP, tel 776 2814.

Motherwell (MLARS)—11 April ("Oate communications", GM8BBA), 7.30pm. Wrangholm Hall Community Centre, Jerviston St, Motherwell, CW and RAE classes. Details GM4UXX, tel 0698 350926.

Stirling (SADARS)—13 April (Stirling University Rag Week, special event station). 7.30pm. The Argyll Centre, Princes St, Stirling. Details GM0BFS, tel 0259 217702. RAE and cw classes each Tuesday.

Regional event, Region 14 Workshop '86—Sunday 13 April between 12.30 and 5pm, Wrangholm Hall Community Centre, Jerviston St, Motherwell. An afternoon with GM4HJ, GM3OXX, GM3HAT and GM4NUN. Lectures, demonstrations, RSCG Information stand and bookstall. Details GM4FDM RR14

REGION 15—RR R Parsons, GI3HXV, 45 Erineve Avenue, Belfast BT10 0FP. Tel 0232 612322.

Ballyclare (E Antrim ARC, GI4KKK)—8 April (AGM). 8pm. Fairview Primary School, Ballyclare. Sec GI4PRH.

Bangor (B&DARS, GI3XRO)—4 April (A talk by the DTI Radio Interference Service), 8pm. Royal Hotel, Bangor. Sec GI4OCK.

Belfast (RSGB Group)—22 April (Meeting). 8pm. 90 Belmont Rd, Belfast. AR GI6ATZ. Enniskillen (Lough Erne ARC)—13 April (Mobile rally—Killybegs Hotel), 8pm. Railway Hotel, Enniskillen. Sec GI4CZW.

Londonderry (North-West of Ireland ARC, GI3CFH)—7 April (Inter-club quiz). 8pm. Prehen Municipal Boathouse, Victoria Rd, Londonderry. Sec GI4OUN.

REGION 16—RR A Owen, G4HMF, 102 Constable Road, Ipswich, Suffolk IP4 2XA. Tel 0473 51319.

Breintree (B&DARS)—7 April (Arrow Electronics), 21 April (TBA). 7.30pm. The Community Centre, Victoria Rd, Breintree (next to bus station). Contact G6THE, tel 0376 25587.

Bury St Edmunds (BSIEARS)—NB changes. Third Tuesday in each month, 8pm. Westgate Primary School (off Hospital Rd), Bury St Edmunds. Sec GI1FUU, tel 0358 50271.

Chelmsford (CARS)—1 April (Early days of Marconi), 7.30pm. Marconi College, Abour Lane, Chelmsford. Sec G4KOE, tel 0376 83094.

Colchester (CRA)—17 April ("The story of broadcasting, 1919-26", J Stanley Wood), 1 May (Planning for NFO and rally), 7.30pm. Colchester Institute, Sheepen Rd, Colchester. Sec G3FJL, tel 0206 851189.

Felixstowe (F&DARS)—7 April (Social), 21 April (10-pin bowling), 5 May ("Fibre-optics", G4DDK), 8pm. The Feathers PH, Walton High St, Felixstowe. Sec G4YOC, tel 0473 642595.

Ipswich (IRC)—9 and 23 April (TBA). 8pm. Rose and Crown PH, Norwich Rd, Ipswich. Sec G4IFF, tel 0473 44047.

Leiston (LARC)—1 April ("EME", K6LEW), 6 May (Visit to Parham Air Museum), 7.30pm. Sizewell Sports & Social Club, Georges Ave, Leiston. Sec G0CJX.

Loughon (L&DARS)—11 April (AGM), 25 April (Informal). 8pm. Loughon Hall, Rectory Lane, Loughon. Sec G6LWR, tel 0279 29457.

Norwich (Norfolk ARS)—2 April (AGM), 9 April ("Technical topics", G3PTB), 16 April (Visit to Fire Service), 23 April (Technical topics), 30 April (AGM of GB3NB Group), 7 May (RSGB videos), 8pm. Valley Drive Community Centre, 79 Plimslead Rd, Norwich. Sec G4WTR, tel 0603 610874.

Vange (VARS)—3 April (Junk sale), 10 April (Films), 17 April (Construction contest), 24 April (G3ASH, Talk), 1 May (Junk sale). 8pm. Barnstable Community Centre, Basildon. Sec Mrs O Thompson, 11 Feering Row, Basildon SS14 1TE.

REGION 17—RR T Emery, Wilverley, Old Lyndhurst Road, Cadnam, Southampton SO4 2NL. Tel 0703 812435

Amateur Radio and Computer Club (AMRAC)—4 April ("Weather satellites", G4NWP), 2 May (AGM). 8pm. The Crown, Bishops Waltham, Hants. Sec G1NIM, tel 0705 381062.

Basingstoke (BARC)—7 April ("Propagation", G3LTP). Forest Ring Community Centre, Sycamore Way, Basingstoke. Sec G4WIZ, tel Tadley 5185.

Eastleigh (Itchen Valley ARS)—11 April ("The weather", G3LTP), 25 April (Junk sale). The Scout Hut, Brickfield Lane, Chandlers Ford, Hants. Sec G6DIA, tel 0703 863039.

Fareham (F&DARS)—2, 16, 23 April (Natter nights), 9 April ("How to predict lift conditions", G8VOI), 23 April ("The Termig", G4ITG), 7.30pm. Portchester Community Centre, Portchester, Hants. Sec G4ITG, tel Fareham 234904.

Farnborough (F&DARS)—9 April (Bring and buy sale), 23 April ("Weather satellites", G8ATK and G3RRA), Railway Enthusiasts Club, Access Rd, off Hawley Lane, Farnborough. PRO G4SBU.

Guernsey (GARS)—11 April ("VHF/UHF high power amplifiers", G6EGB), 25 April ("The GU3GU repeater project", GU4EON). The Lodge, La Corbinerie, Oberlands, St Martins, Guernsey. Sec GU1PMY, tel 0481 26392.

Liphook (Three Counties ARC)—2 April ("The solar system", B States), 16 April ("Direction finding", G2F1X), 30 April (AGM). The Railway Hotel, Liphook. Sec G0BTU, tel Petersfield 66489.

Lymington—Results of recent agm: chairman G5IK; treasurer G2HCG; secretary, G2AIV. Tel Lymington (Hants) 72844.

Poole (PARS)—25 April (AGM), 7.30pm. Commander's House, Constitution Hill Rd, Poole. NB change of meeting place. Sec G4XYX.

Swindon (S&DARC)—3 April ("Buying of used radio equipment", G4LVK), 10, 24 April (Natter nights), 17 April ("POW radio on the Burma Road", G3BA), 7.30pm. Oakfield School, Marlowe Ave, Swindon. Sec G4YOZ.

Waterside (WSWC)—8 April (Natter night), 22 April (AGM). Fawley & Blackfield Community Centre, Blackfield, Southampton. Sec G1KMY.

Weymouth (SDARC)—1 April (AGM), 7.30pm. Army Bridging School, Wyke Regis. Sec G6HKD.

Winchester (WARC)—18 April ("Satellite tv", G3WPI), 7.30pm. NB change of venue and day of meeting, third Friday, Ourgate Hse, Winchester. Sec G4ZNO, tel 0703 772191.

I am now very short of advance programming information. Please help me to help your club—even if only to report you are still active. Dates by which information should reach me are printed at the beginning of "Club News". RR17.

REGION 18—RR Ian Gibbs, G4GWB, 61 The Gables, Widdrington, Morpeth NE61 5OZ. Tel 0670 790090

Berwick (Borders ARS, G0BRS)—4 April (Visit to RAF Boulmer), 18 April ("Slow scan tv and wx satellites", GM8JFE and GM3WIG), 2 May (Collection and arrangements for Kelso Rally), 4 May (Kelso Rally). Tweed View Hotel, Tweed St, Berwick. Sec GM1IRN, tel 0289 82491.

Consett (Derwentside ARS, G4PFQ)—7 April (All you ever wanted to know about the gdo), 14 April (Natter night), 21 April ("Top band, yesterday and today", ex-GD3EGF), 28 April (Natter night and morse and RAE tuition), 12 May ("Amateur radio in Antarctica", G4BCP). Consett Assoc FB Club, Belle Vue Park, Consett. Sec G3KMG, tel 0207 504198.

Easington (EARS, G4APN/G6APN)—24 April (Video evening). Easington Workmen's Club, Seaside Lane, Easington, Sec G4RIK, tel 0783 815331.

Whitby (Tynside ARS, G3ZOM)—2 April (Informal), 9 April ("Converting cb rigs for 28MHz", G4AZB, also foxhunting briefing, G0DZB), 13 April (Sunday foxhunting), 16 April (AGM), 23 April (Forward planning, general discussion), 30 April (Activities evening, constructional projects, demos, club station etc). Community Centre, Earsdon. Details G4ILW.

REGION 19—RR R J C Broedbeni, G3AAJ, 94 Herongate Road, Wansley Park London E12 5EO. Tel 01-989 6741.

Barking (BR&ES)—Mondays, RAE class and slow morse practice, Tuesdays, morse class. Thursdays, club natter night and talks. Westbury Recreation Centre, Westbury School, Ripple Rd, Barking. NB new sec T Marston, 57 Suffolk Rd, Barking, Essex, tel 01-594 0291

**Boreham Wood (BEARS)**—Third Monday of each month. 21 April. ("Expedition to Lundy Is"). Talk by Nene Valley ARS. 8pm. The Wellington, Theobald St, Boreham Wood, Herts. Sec G0DDJ, tel 01-207 3809.

**Cheshunt (CDARC)**—2 April (TBA), 9 April (Natter night), 16 April (Chairman's lecture), 23 April (Natter night), 30 April (Brains Trust). 7.45 for 8pm. Church Rooms, Church Lane, Wormley, Herts. Sec G4VMR and G4VSL, tel 0920 84250 evenings. Morse classes are also held.

**Chiswick (ABCARC)**—10 April (Current affairs discussion), 7.30pm. Chiswick Town Hall, High Rd, Chiswick, London W4. Sec G3GEH, tel 01-992 3778.

**Edgware (E&DRS)**—10 April ("Clandestine radio", Pal Hawker, G3VA), 24 April (Informal round table discussion). 8pm. Walling Community Centre, 145 Orange Hill Rd, Burn Oak, Edgware. Details G4SYI, tel 958 9869.

**Harrow (RSH)**—4 April (Activity night), 11 April (Inmarsat), 18 April (Activity night), 25 April (SSTV, rty and others). The Roxeth Room, Harrow Arts Centre, High Rd, Harrow Weald, Middlesex. Pub Off. Details G8XBZ, tel Rickmansworth 779942. Talk-in on GB3HR.

**London (Civl Service ARS)**—7 April (AGM, 12.30pm). Chair/station manager, B Treacher, tel 01-212 8823, or sec G6IMM, tel 01-698 4437.

**St Albans (Verulam ARC)**—8 April (Activity night), 22 April ("LF antennas and sunspot minimum", G3BDQ). 7.45 for 8pm. RAFA HQ, New Kent Rd, St Albans. Details G Wimpenny, 30 Faircross Way, St Albans, tel 52003. PRO G4DUS, tel 0923 720616.

**Southgate (SARC)**—10 April (Surplus equipment

sale, junk sale). NB new venue Holy Trinity Hall, Green Lanes, Winchmore Hill, London N12. Please contact PRO R F Snary, 12 Borden Ave, Enfield, Middx.

**SW Herts UHF Group**—This group maintains GB3HR (RB14) now located at Sianmore, Middx, and welcomes monetary support. All donations from users and others will be gratefully received by G3WCB, or G3THQ.

**Stevenage (SDARS)**—1 April (Report on Giotto by Pilot), 15 April (Film evening). SITEC Ltd, Ridgemoor Rd, Telford Park, Stevenage. Sec G4TSO.

I have waited until the very last minute before writing this month's notes to enable club secs to update their programmes and send them to me. Will committee members bring to the attention of their secretary the dates that publicity material must reach me in order to be published in "Club News". The London RSGB Group is now defunct. I am informed by the committee who wound up the affairs of this long established group that all monies in the bank account have been sent to the RAIB.

**REGION 20—N F O'Brien\* G3LP, 26 Southfield Road, Gloucester GL4 9UD. Tel 0452 34890**

\* Acting until post is filled.

**Bath (B&DARC)**—2 April (Open night), 16 April (AGM), 7.45pm. Englishcombe Inn, Englishcombe Lane, Bath. Details G6EIV, tel 0225 318128 or G3FIH, tel 0225 837539. Club station G4TMH regularly operating.

**Bristol (BARC)**—2 April (Specialist video), 9 April (Club management meeting), 16 April (Night on the air), 23 April (Computer night), 30 April (TBA). 7.30pm. YMCA, Park Rd, Kingswood, Bristol. Details G4YOC, tel 0111 4116.


**Bristol (RSGBG)**—28 April ("G-GRP Club", G4LOF). 7.30pm. Small Lecture Theatre, Bristol University. Details G4SQQ, tel 0272 508451, or G4RQX, tel 0272 513573.

**Bristol (South Bristol ARC)**—2 April ("CW in a foreign language", G4WUB), 9 April ("Microwave activity night", G8BDZ), 16 April ("Start of club vhf/uhf dx contest", G4KUQ), 23 April ("Report on expansion of club facilities", G4RZY), 30 April ("Crime prevention", Avon & Som Police), 7 May ("Simple hf antenna construction"). 7.30pm. Whitchurch Folk House, East Dundry Rd, Whitchurch, Bristol BS14 0LN. Details G4RZY, tel Whitchurch 834282.

**Gloucester (GARS)**—2 April (Construction contest), 9, 16, 23, 30 April (Natter nights), 7 May (Medical talk "Does amateur radio give you a pain in the back?"). 7.30pm. St John Ambulance HQ, Heathville Rd, Gloucester. Details G6AWT, RAE and morse classes every Wednesday, 7pm.


**Yeovil (Y&DARC)**—3 April ("I notation", G3MYM), 10 April ("The lambda diode oscillator", M3MYM), 17 April (AGM), 24 April (Natter night), 1 May ("Fading and fade-out", G3MYM). 7.30pm. Recreation Centre, Chillon Grove, Yeovil. Sec G3GC, tel 0935 75533.

**Weston-Super-Mare (WSMRS)**—14 April (Visit to British Telecom International's Burnham Radio Station, Highbridge. Rugby Club, 7.15pm. Prior arrangements with sec). Full details G1DJW, tel 514429.



**Bredhurst**  
electronics

**BREDHURST ELECTRONICS LTD**  
HIGH ST, HANDCROSS, W. SX.  
(0444) 400786 RH17 6BW



**MAIL ORDER  
AND RETAIL**

SITUATED AT SOUTHERN END OF M23—EASY ACCESS TO M25 AND SOUTH LONDON

| TRIO            |         |        | TRIO              |        |   | TRIO                |       |       |
|-----------------|---------|--------|-------------------|--------|---|---------------------|-------|-------|
| TS930S          | 1395.00 | —      | TM201A 25W Mobile | 296.00 | — | SP230 TS830 5301    | 51.40 | 12.00 |
| FT980           | 1769.00 | —      | IC27E 25W Mobile  | 399.00 | — | SP430 TS4301        | 39.50 | 12.00 |
| IC751           | 1399.00 | —      | ET270R 25W Mobile | 369.00 | — | SP102 IFT1021       | 68.00 | 12.00 |
| IC745           | 989.00  | —      | TC2600 Handheld   | 299.00 | — | SP40 Mobile speaker | 19.08 | 11.00 |
| TS430S          | 750.00  | —      | TH21E Handheld    | 189.00 | — | SP55 Mobile speaker | 16.50 | 11.00 |
| TS830S          | 896.00  | —      | FT209RH 1ENB31    | 276.00 | — |                     |       |       |
| ET757GX         | 879.00  | —      | IC2E Handheld     | 199.00 | — |                     |       |       |
| TS530SP         | 779.00  | —      | IC02E Handheld    | 299.00 | — |                     |       |       |
|                 |         |        |                   |        |   |                     |       |       |
| DM891 Dip Meter | 99.00   | (2.00) |                   |        |   |                     |       |       |

**ANTENNA TUNER UNITS**

|                              |        |       |
|------------------------------|--------|-------|
| IC-AT100 auto                | 349.00 | —     |
| AT250 auto                   | 314.00 | —     |
| AT230                        | 170.00 | 12.50 |
| FC700                        | 132.00 | 12.50 |
| AC38                         | 85.00  | 12.50 |
| FRT7700 Short Wave Listening | 53.50  | 12.00 |

**2M MULTIMODE TRANSCEIVERS**

|                                       |         |   |
|---------------------------------------|---------|---|
| TS780 2M and 70cm base                | 1061.00 | — |
| FT726R 2m limited 170cm optional base | 899.00  | — |
| TS711E 2M base station                | 770.00  | — |
| IC271E 25W base                       | 779.00  | — |
| IC290D 25W Mobile                     | 519.00  | — |
| TR9130 25W Mobile                     | 544.00  | — |
| ET290R Portable                       | 365.00  | — |

**70cm TRANSCEIVERS**

|                        |        |   |
|------------------------|--------|---|
| TW4000A Mobile 2M/70cm | 590.00 | — |
| TM401A 12W Mobile      | 350.00 | — |
| FT2700R 2m/70cm        | 499.00 | — |
| IC4E Handheld          | 286.00 | — |
| IC04E Handheld         | 299.00 | — |
| TS-811E Base           | 896.00 | — |
| TH41E Handheld         | 220.00 | — |

**MORSE EQUIPMENT**

|                              |        |       |
|------------------------------|--------|-------|
| HK 707 Straight Key          | 15.50  | 11.00 |
| HK 703 "deluxe" straight key | 28.95  | 11.50 |
| HK 802 "deluxe" Brass key    | 85.00  | 12.00 |
| MK 704 Squeeze paddle        | 19.95  | 11.00 |
| CW-3 Practice Oscillator     | 10.95  | 11.00 |
| EK 150 Electronic keyer      | 103.00 | 12.00 |
| O 70 Datong Morse tutor      | 54.35  | 12.00 |
| BENCHER Iambic paddle BY-1   | 67.42  | 11.50 |
| GW Brass Key on slate        | 35.50  | 12.50 |
| MK Datong Morse keyboard     | 137.42 | 12.00 |

**ANTENNA BITS**

|  |           |       |
|--|-----------|-------|
| 7-1MHz RAL-TRAPS—Epoxy—pair            | 9.95      | 11.50 |
| Self Amalgamating Tape 10m x 25mm      | 3.95      | 10.75 |
| 7-piece polyprop Dipole centre         | 1.50      | 10.30 |
| Small ceramic Egg Insulators           | 0.50      | 10.15 |
| Large ceramic Egg Insulators           | 0.75      | 10.15 |
| 75 ohm Twin Feedal-light duty          | per metre | 0.15  |
| 300 ohm Twin Feeder                    | per metre | 0.14  |
| UR67 Low loss coax—50 ohm              | per metre | 0.15  |
| UR76 50 ohm coax—dia 5mm               | per metre | 0.30  |
| UR70 70 ohm coax                       | per metre | 0.35  |
| 4mm Polyester Guy Rope, strength 400kg | per metre | 0.15  |
| 50 metres 16 swg harddrawn copper      | 6.90      | 11.50 |
| Hi-Q Balun 1:1 5KW PEP                 | 11.95     | 10.75 |

**COAXIAL SWITCHES**

|                                    |       |       |
|------------------------------------|-------|-------|
| SA450 2 Way On/Off SO239 1500MHz   | 14.95 | 11.00 |
| SA450N 2 Way On/Off N plug 1500MHz | 19.95 | 11.00 |
| CH20A 2 Way Wetz SO239 1900MHz     | 23.95 | 11.00 |
| CH20N 2 Way Wetz N plugs 1300MHz   | 42.95 | 11.00 |
| DRAE 3 way SO239 sockets           | 15.40 | 11.00 |
| DRAE 3 way N sockets               | 19.90 | 11.00 |

**PHDNE FOR**

G.WHIP B.N.O.S. JAYBEAM KENPRO DRAE WELZ

**FURTHER DETAILS**

**TRIO TL 922 LINEAR £1265.00**

**AKD WAVEMETER (VHF) £24.95**

**METEOR 600 FREQUENCY COUNTER £145.00**

## HEATHERLITE MOBILE MICROPHONES

You've probably seen one and heard one, they're well tried and tested. Lightweight and inconspicuous, good audio quality, ease of operation, turn around the collar or over the head. Control box with mic gain control, scan buttons, L.E.D. indicator on transmit, made individually and plugged to suit your rig.

—with plug and scan buttons £24—with plug without scan buttons £21.50—with plug and extra amplifier for 8pin loom rigs, eg IC255 etc, £22.50—mic band and coax, not control box. circuit to make your own box £6.50, post and packing £1.50 per order.

CHEQUES TO HEATHER RODMELL G8SAV, QTHR. TEL 104011 50921

## VALVES

The following valves in matched pairs 6JS6/C, 6KD6, 6JB6/A, 6LO6, 6HF5, 6146A, 6146B. YES! the 6JS6/C is Japanese and works in the FT107. Most amateur radio valves including difficult to obtain types EX STOCK. Quotations without obligation, if we don't stock your type we may be able to import for you. PLEASE ENQUIRE, REMEMBER over 200 types EX STOCK. See for list. \*Phone for assistance in types suitable for your equipment. USA and Jap manufacture of popular types available.

**DON'T DELAY 'PHONE TODAY 045 75 6114, G4AZM**  
Wilson, Peel Cottage, Lees Road, Mossley, Tameside, Manchester

# North London Communications



## NEW HANSON SWR METRES

|   |   |              |
|---|---|--------------|
| SWR3  | 3.5-30MHz 200 Watts/50-150MHz 50 Watts  | 24.95 (1.50) |
| SWR50   | 3.5-150MHz 1KW PEP with back light facility   | 29.95 (1.50) |
| SWR500  | This peak reading meter has RMS/PEP with follow hold facility in the range 1-8-60MHz - 20/200/2KW | 52.50 (2.00) |
| <b>Still Available:</b>                               |   |              |
| SWR15   | Single meter SWR/Field Strength 3.5-150MHz  | 9.77 (1.50)  |
| SWR25   | Twin meter SWR/Power/Field Strength 3.5-150MHz  | 16.50 (1.50) |
| TAL172  | Twin meter 144/432MHz SWR/Power 20W/120W  | 44.95 (1.50) |
| UH74  | SWR Power meter switchable HF/2M/432MHz (10W) with remote head                                    | 22.00 (1.50) |
| T435  | VHF/UHF Twin Meter 2/20/120W  | 42.00 (1.50) |
| <b>Special Offer This Month SWR15 £5.95 + P&amp;P</b> |   |              |

## WELZ PRODUCTS

|       |   |               |
|-------|---|---------------|
| SP300 | 1-8-500MHz 20W-200W-2KW Power/SWR Meter | 129.00 (1.50) |
| SP380 | 1-8-500MHz 200W Dash Mount              | 69.00 (1.50)  |
| SP15M | 1-8-160MHz 5W-20W-200W Power/SWR Meter  | 49.00 (1.50)  |
| SP10X | 1-8-500MHz 200W Pocket Size             | 34.00 (1.00)  |
| AC38  | 3.5-30MHz Coax ATU 200CW/400C PEP       | 85.00 (1.00)  |

## ADONIS MICS

|       |   |              |
|-------|---|--------------|
| AM803 | Desk Compressor Mic with Head and Swan Neck | 72.50 (1.15) |
| AM503 | Desk Compressor Mic as 803 with One Output  | 55.00 (1.15) |
| FX1   | Swan Neck Fel Mic with Control Box          | 46.50 (1.15) |
| 202S  | Flexible Neck Clip Mic with Control Box     | 32.50 (1.15) |
| HW7   | Head Set Boom Mic for Yaesu/Icom/Trio       | 27.50 (1.15) |

## ROTATORS

|        |  |               |
|--------|--|---------------|
| AR2200 | Heavy Duty Antenna Rotator                       | 79.95 (3.00)  |
| KR400C | Mid to heavy Vertical Load 200KG 6 core cable    | 132.50 (5.50) |
| KR600C | Heavy-vertical load 200KG Brake Torque 4000KG/CM | 189.50 (5.50) |

## ANTENNAE

|   |   |               |
|---|---|---------------|
| TA285   | 2M Colinear Base Antenna/70cm Colinear        | 35.00 (17.50) |
| Aluminium   | Tripod + Extension Mast - (Total Height 15ft) | 79.95 (17.50) |
| We also stock a full range of Telecomm, ASP, Maspro, Jaybeam, Mel, etc Antennae + Accessories |   |               |

## POWER SUPPLIES

|        |   |                |
|--------|---|----------------|
| PX402  | 3A Continuous 4A Max 13-8VDC Fully Stabilized   | 24.95 (4.00)   |
| EP2510 | 25A Continuous 30A Max 13-8VDC Fully Stabilized | 138.00 (16.50) |
| DRAE   | 13-8VDC 12 Amps                                 | 86.50 (15.00)  |
| DRAE   | 13-8VDC 6 Amps                                  | 63.00 (4.00)   |

## MORSE KEYERS

|        |   |                |
|--------|---|----------------|
| EK150  | Semi/Fully Automatic Electronic Keyer with Built-in Monitor, Transistor or Relay Output 240VAC/120C | 90.00 (11.50)  |
| MK1024 | As EK150 but with 1024 Bit Memory   | 109.25 (11.50) |
| HK707  | Straight Up/Down Keyer  | 15.50 (1.00)   |
| HK702  | As HK707 only with a Heavy Marble Base  | 29.75 (11.50)  |
| HK704  | Squeeze Keyer   | 14.00 (11.50)  |
| MK705  | Squeeze Keyer   | 29.75 (11.50)  |
| MK702  | Manipulator Key on Marble Base  | 29.75 (11.50)  |
| BK100  | Semi Automatic Bug Key  | 24.75 (11.00)  |
| EKM-1A | Morse Code Practice Oscillator with variable Tone   | 8.75 (11.00)   |

## COAX SWITCHES

|  |   |               |
|--|---|---------------|
| SA450  | Diecast 2 Way SO239 3.5-500MHz                | 12.65 (11.00) |
| Toggle Type  | CT1 3X SO239/CT2 2X SO239/1X PL259 3.5-150MHz | 7.50 (11.00)  |
| <b>Special Offer: On Toggle Switches £5.00 + P&amp;P</b> |   |               |

## SPEAKERS + MICS

|  |                               |               |
|--|-------------------------------|---------------|
| TA220  | 600 Ohm Swan Neck Base Mic    | 45.00 (12.50) |
| TA208  | Speaker 4-8 OHMS 3 to 4 Watts | 9.50 (11.00)  |
| All Popular Connectors - Termination - Sockets<br>Ex-Stock at Competitive Prices - TRY US? |                               |               |

211 West Hendon Broadway, London NW9 7DE.  
Tel No: 01-202 3638  
Telex: 298765 UNIQUE-G

and  
(Formerly Lee  
Electronics)

400 Edgeware Road, London W2.  
Tel No: 01-723 5521  
Telex 298765 UNIQUE G



Normally 24hr despatch but please allow 7 days for delivery

Mail order + Retail  
All prices are inclusive of VAT and are correct at time of going to press

Northern Agents: Joe Bell G4PMY  
Unit 3, Thomas Street, Crewe,  
Tel No: 0270 582849

# FARNBOROUGH COMMUNICATIONS

PRICE?  
Bargain  
with Mick GAMPW

## FOR ALL YOUR AMATEUR EQUIPMENT

PRICE?  
Bargain  
with Mick GAMPW

Yaesu, FDK, Icom, Drae, Microwave Modules, J-Beam, Shure Mics, Adonis Mics, Welz Equipment. TVI high pass and band stop filters.

## Instant HP Terms

97 Osborne Road  
North Camp  
Farnborough, Hants  
Tel: (0252) 518009



## BINARY STAR TECHNOLOGY

### AMATEUR RADIO SOFTWARE

**SATELLITE TRACKING ON THE COMMODORE 64 AND 128 (Both with 1541 disk drive)** This superb program tracks any satellite, the moon and shuttle. As supplied the program tracks all of the following: (Can be altered by the user)  
RS 5, 7, 8, 9, 10 OSCAR 9, 10, 11, NOAA 8, 9 JAS 1 SPACE SHUTTLE, MOON  
**Available on disk only.....12.95**  
**CIVIL TRANSCIBE ON THE CBM64 OR VIC-20 (8k + )** Speed 5 to 50WPM (99WPM on CBM64). Full transcribe using a simple interface. Stores can be programmed with station details etc and saved to tape. Type-ahead on (transmit). **Cassette only.....5.95**  
**MORSE TUTOR FOR THE BBC COMMODORE SPECTRUM** (Spectrum needs joystick) Morse tutor to beyond the fast. Morse keyboard, random letters/figures, punctuation, plain language. **SENDING TUTOR FEATURE** Decodes morse from a key plugged into the joystick port. (Spectrum needs joystick interface) BBC and CBM64 calculate average sending speed  
**Cassette.....5.95 BBC EPRM.....11.95**  
**RITTY TRANSCIBE VERSION 3 (FOR THE 49K SPECTRUM ONLY)** Baud rates 45/50/75/110 - simple interface. Features eight stores (may be saved to tape). Split-screen, type-ahead keyboard buffer. Optional auto PTT control. **Cassette only.....7.95**  
**Cassette + pcb with TX+RX components (parts for auto PTT not supplied).....14.95**  
SAE FOR DETAILS OF OTHER SOFTWARE FOR BBC/ELECTRON/SPECTRUM/ZX-81/CBM-64/VIC-20  
Prices INC p&p Please make cheques payable to Binary Star Technology

Orders to: Dept RC6, 6 Waverley Terrace, Haverhill, Suffolk CB9 6DZ

Our CLAMP-ON RF CHOKE is the easiest and quickest cure for interference problems caused by radio, TV, and computer cables. It is effective on all bands from long-wave BC to 2metre amateur and high-band mobile radio.

### Use it on the TRANSMITTER

- on the aerial lead to improve the radiation pattern and reduce interference.
- on the microphone lead to prevent rf feedback.
- on the mains lead to reduce local interference.


### Use it on the RECEIVER

- on aerial and mains cables to solve TVI and BCI problems.
- on loudspeaker cables to reduce Hi-Fi I.

### Use it on a COMPUTER or RITTY STATION

- to reduce the hash emitted from VDU, disk drive, modem and printer cables.

A long sized boxed kit type D918, sufficient for up to eight cables and complete with full application details will be posted immediately upon receipt of £25.30 (special UK CWO price inclusive of delivery and VAT at 15%). Orders and requests for data sheet (see please) to: USJBA at  
EMC DATACARE LTD, POWER COURT, TUNTON LU1 3JJ, Beds. Tel: (0532) 450747





# WATERS & STANTON ELECTRONICS

## TRIO

APPROVED  
DEALER FOR  
ESSEX &  
THE SOUTH

NEW THIRD EDITION  
AVAILABLE APRIL

### UK CONFIDENTIAL FREQUENCY LIST

Completely updated with 50% more information. Covering 2-30? This publication is a must for all UK short wave listeners. It contains information that no serious listener should be without. Listed are details not normally available to the public of frequencies used by a wide range of services. As well as some general information the main body of the publication contains a comprehensive list of non-broadcast stations such as Military, Air, Navy, Marine & Embassy, even details of stations whose whereabouts are still a mystery! In addition, there is a comprehensive list of broadcast stations with times and frequencies of all the broadcasts in English. This publication will certainly have you burning the midnight oil. Only a fraction of the price of some overseas publications and written with the UK listener in mind.

New third edition available April

£5.95 + 40p P&P

### SCANNER OPERATORS' GUIDE TO THE VHF/UHF SPECTRUM

NEW!

If you're one of the many new owners of a scanning receiver and are not sure where to listen then this is for you. Only just published and covering the range 27 to 1300MHz it provides details of frequencies that the various services operate on. Fascinating reading for the student of the radio spectrum it will put you at a tremendous advantage to those who just 'tumble about in the dark'. At this price can you afford not to have a copy beside you.

£3.95 + 40p P&P

| TRIO                          | ICOM                     | BNOS                         |
|-------------------------------|--------------------------|------------------------------|
| TS940 HF Icvl. £1795.00       | ICV751 HF Icvl. £1399.00 | 25Amp P.S.U. £169.00         |
| AT940 Int. ATU £216.00        | IC745 HF Icvl. £989.00   | 40Amp P.S.U. £345.00         |
| TS HF 430S Icvl. £750.00      | IC735 HF Icvl. £899.00   | 2M 3/50 no pre-amp £125.00   |
| PS403 PSU for above £139.00   | PS35 PSU £182.65         | 2U 10/50W no pre-amp £125.00 |
| AT250 Auto ATU £314.00        | PS15 PSU £149.50         | 2U 1/100W £197.50            |
| AT230 HF ATU £170.65          | PS55 PSU £185.00         | 2U 3/100 £175.00             |
| TS9305 HF 240v Icvl. £698.00  | SM6 £39.10               | 2M 10/100 £265.00            |
| TS5305 HF 240v Icvl. £779.00  | ICR71 Receiver £789.00   | 2M 25/150 £217.00            |
| 1L922 linear £1265.00         | IC271E 2m base £779.00   | 70cm 3/50 £235.00            |
| MICS—All stocked              | IC471E 70cm base £889.00 | 70cm 10/50 £195.00           |
| TS780 2m/70cm Icvl. £1061.00  | IC2900 All-mode £519.00  | 70cm 10/100 £335.00          |
| 1R9130 2m all-mode £544.00    | IC27E 2m FM £399.00      |                              |
| TH21E 2m h'held £189.30       | IC47E 70cm FM £495.00    |                              |
| TH41E 10cm h'held £220.95     | IC2E 2m £199.00          |                              |
| TR2600 2m h'held £299.00      | IC02E 2m £299.00         |                              |
| TM201A 2m fm mobile £296.00   | IC04E 70cm £299.00       |                              |
| TM401A 70cm fm mobile £350.90 | BP3 Mc-rod pack £28.75   |                              |
| TM211E 2m fm Icvl. £390.00    | LC3 Case £6.50           |                              |
| TS711E 2m base £770.00        | LC11 Case £8.05          |                              |
| R600 Receiver £323.75         |                          |                              |
| R2000 Receiver £510.70        |                          |                              |
| VCT0 VHF module £139.00       |                          |                              |

### NOBODY BEATS OUR MAIL ORDER SERVICE

All goods despatched by return, 24 hour Securicor £6. Carriage: Transceivers, receivers, etc, Securicor £6, smaller items £2. Aerials at cost. If in doubt phone for quote.

| YAesu                       | WELZ                       | FDK                        |
|-----------------------------|----------------------------|----------------------------|
| FR8800 Receiver £575.00     | SP400 VSWR/VHF/UHF £69.00  | M/50XX 2m all-mode £399.00 |
| FR8900 Scanner £465.00      | SP10X Budget HF/VHF £34.00 | M725X 2m FM mobile £259.00 |
| PA4C PSU £14.50             | SP220 PEP HF/VHF £59.00    | ATC/20 Airband rx £189.00  |
| FRV8800 VHF module £90.00   | SP225 Dual meter £99.95    | RX40 140-180MHz £159.00    |
| FI203/FNB3 2m £225.00       | SP420 PEP VHF/UHF £89.00   |                            |
| FI209H/FNB3 2m £265.00      | SP425 Dual meter £99.00    |                            |
| FI270R 2m £359.00           | AC38 ATU 10-80m £65.00     |                            |
| FI290R All mode £369.00     | CH20A Coax switch £23.95   |                            |
| FI2700R Dual band £499.00   | RS485 4 amp PSU £47.00     |                            |
| FI709/FNB3 70cm £275.00     | RS655 6 amp PSU £79.95     |                            |
| FI726R 2m base £699.00      | RS1150 11 amp PSU £119.95  |                            |
| FI770CM 70cm module £309.00 | RS3050 25 amp PSU £179.00  |                            |
| SA1776 £116.00              |                            |                            |
| FI576X HF Icvl. £879.00     |                            |                            |
| FC75/AT Auto ATU £319.00    |                            |                            |
| FP75/GX Switch mode £199.00 |                            |                            |
| FI980 HF Icvl. £1759.00     |                            |                            |
| IP757HD PSU £199.00         |                            |                            |
| FF5010X L.P.F. £33.00       |                            |                            |
| FI2100Z 1KW linear £882.00  |                            |                            |
| YI55 II'phones £17.50       |                            |                            |
| NCI IC Charger £10.00       |                            |                            |
| YMA8 £48.00                 |                            |                            |
| YI1A15 290 helical £7.50    |                            |                            |
| DIR240 Clock £39.00         |                            |                            |

| MICROWAVE M          | JAYBEAM                    | SPECIALS                  |
|----------------------|----------------------------|---------------------------|
| MML144/301S £94.30   | 1B3 hi 3 el. beam £230.00  | FT290 2m all mode £299.00 |
| MML144/50S £106.95   | VR3 3 band vert £55.75     | TS830 9 band 100W £799.00 |
| MML144/100S £149.95  | 4Y6m 4 el 6m £46.95        | RF3100 Gen cov rx £229.00 |
| MML144/100HS £159.85 | UGP 2m g. plane £14.65     | /600 Sony rx £159.00      |
| MML432/30L £169.95   | LR1/2m 2m col 4 3db £39.00 | SK200n Scanner £279.00    |
| MML432/50 £149.95    | LWS/2m 2m 5 el £16.75      | SK400n Scanner £499.00    |
| MML432/100 £299.00   | LWS/2m 2m 8 el £21.00      | Sony 20010 329.00         |
| LMC144V £37.90       | 1W10 2m 10 el £27.25       |                           |
| MU1144/28R £236.90   | LW16 2m 16 el £40.75       |                           |
| MML435/600 £35.55    | SKY 2m 5 el xd £32.00      |                           |
| MML435/295 £35.65    | SKY 2m 8 el xd £41.50      |                           |
| MML432/28S £39.90    | 04 2m 4 el quad £33.95     |                           |
| MML432/144S £39.90   | 06 2m 6 el quad £44.50     |                           |
| MML1296/144 £219.95  | PBM18 70cm 18 el £37.00    |                           |
|                      | PBM24 70cm 24 el £52.90    |                           |
|                      | MBM48 70cm 48 el £40.75    |                           |
|                      | MBM88 70cm 88 el £55.75    |                           |

### PART EXCHANGE

We urgently need your good unwanted gear. Must be clean and in working order. Just telephone for our cash or P&P offer.

MAIL ORDER & MAIN SHOWROOM:  
BRANCH:

Further price increases expected on Welz/Diamond/FDK/Adonis. Please telephone  
18-20 MAIN ROAD, HOCKLEY, ESSEX. Tel: Southend (0702) 206835 & 204965  
12 NORTH STREET, HORNCHURCH, ESSEX. Tel: Hornchurch (04024) 44765  
HOURS: MON-SAT 9.00 am-5.30 pm. E.C. WEO 1.00 pm

### NEW AOR 2002 RECEIVER



25-1300MHz £435

The new AOR scanner must now rule supreme over its competition and is without doubt the best available. We have tested this unit thoroughly on all and have nothing but praise for it. Each one is carefully tested by us before despatch (important at 1.3GHz). Order yours today. The Yen is getting stronger.

### NEW WELZ "PEP" RANGE

At last you can read — PEP — RMS — VSWR

SP220  
1-8-200MHz  
2/20/200 Watts  
£59.95



SP420  
140-525MHz  
4/20/200 Watts  
£69

SP226  
1-8-160MHz  
5/15/150 Watts  
Twin meters  
£109.95



SP425  
140-525MHz  
5/15/150 Watts  
Twin meters  
£109.95

### JUST ARRIVED—25-1300MHz Discone

The new 0130 Discone has just arrived from Welz-Diamond. Covering the range 25-1300MHz it is the ideal companion for the modern scanner receiver. It also has the lovely feature of being able to perform as a transmitting antenna for 6m; 2m; 70cm; and 1296. This really is a beautifully constructed antenna. Limited stocks so hurry. 'Not permitted in UK. See below'

### "MINI WHIPS" 2m & 70cm

Highly efficient, these new helical whips are extremely short and yet have amazing performance. Just like the "professional" type antennas they make your hand-held highly compact. Fitted with BNC connector it is a direct substitute for your regular whip.

£7.95 P&P 75p

### WELZ ANTENNA BREAKTHROUGH!

25-1300MHz Wide-band Discone (re-ceiver) PLUS Transmit on 6m; 2m; 70cm; 23cm. 'Not permitted in UK.'

£69.95  
P&P £2.00

### COMING SOON! 3dB Gain Whip for FT290

The item that everybody has been asking for, a "Super Rod" that plugs into the FT290. These amazing antennas give a full 3db of gain when extended to full length. Alternatively they can be telescoped down to a 1/2 wave. Packs down to slip in ones pocket! It gives 3db of gain on both receive and transmit (2 x power increase!)

£11.50



MONITORING OR TRANSMIT...  
...ONE ANTENNA DOES EVERYTHING!



# A BIG THANKYOU FROM



All of us at MET wish to take this opportunity to thank you, the ever increasing numbers of MET users for making us the fastest growing British manufacturer committed to the radio amateur. Our list of Retailers is expanding to the extent that it was in danger of taking over the whole ad! Suffice to say that a trip to a good Emporium should be rewarded. If in doubt telephone us and we will be pleased to inform you of your nearest stockist.

This expansion is primarily due to the high standards that we have achieved. Our antennas are constructed from high quality aluminium, carefully selected for its strength and corrosion resistance. This, combined with sound mechanical engineering and an electrical design (NBS) offering peak performance has made us a Market Leader. Naturally WE have always fitted 'N' type connectors as standard on all our amateur antennas - watch the others follow!

Writing this in January, we regret that some customers may have experienced a little delay in obtaining our products, this has been due to recent export orders and increasing home demand. By the time you read this there should be no difficulty and our UK dealers should be fully stocked once again. 1986 will see fewer personal attendances by MET at the ever growing number of rallies around the country. This will free much needed time to concentrate on increasing our production and on research and development of forthcoming products. However, MET stands will remain a familiar sight at the larger events with the exception of this years NEC. By way of protest we have declined to take a stand at this event, but the full range of MET products will be available from several well known retailers, with MET technical representatives in attendance to meet old friends and new. Again a telephone call to us will provide more information.



## 50 MHz ANTENNAS

50/3 3 ele 2.39m 7.1 dBd £39.95  
50/5 5 ele 4.77m 9.2 dBd £59.90

All 'N' Type terminated

50MHz is now well and truly here and we are very pleased that both of our models have already become so popular. Whilst we have retained our usual high quality boom section and adjustable gamma match, the elements are constructed of 1/2" heavy duty extruded aluminium tube. The 5 element has a boom length of 4.77 metres, so a box of four should suitably impress the neighbours (not to mention the DTI!). Seriously though, don't forget, if you can't hear them, you can't work them.

During 1985 many successful DXpeditions and Contest winners have been delighted with the performance of MET products. Congratulations to G4DCV - winner of the November CW Contest, with his pair of 144-147's and MET power splitter. Let us hear more from our winners in 1986.

PS As from 1st April 50MHz 8 way power splitters for EME will not be available, details on application.



Kingsdown Road, St. Margarets-at-Cliffa, Dover, Kent CT15 6AZ

Telephone 0304 853021 Telex 965644 LCL DOV

(Enquiries from Dealers and Overseas Distributors welcome)

Please make cheques payable to metallayre

Please allow 14 days delivery



## VHF communications

A Publication for the Radio Amateur

VHF COMMUNICATIONS is the English version of the popular and renowned German amateur magazine UKW-BERICHT. It features articles of interest to all amateurs, who are more inclined to the constructional and technical aspect of the hobby—operational and band reports are not covered. Despite its title, the magazine features articles on the broad frequency spectrum of amateur radio, i.e. from HF to the 24GHz band. In addition, an extremely popular series is devoted to weather satellite reception, in which we specialize for professional applications.

Kits are available for the main constructional articles and we can supply all the special components needed. Back copies of the magazine are still re-printed and available at reduced prices. Please ask for the index from 1970 thru 1984.

VHF COMMUNICATIONS appears quarterly at DM 24.00 per annum. Prices are in DM incurring bank charges, but payment by VISA or ACCESS is possible—in any case, it's worth it!

P.S. VHF COMMUNICATIONS are always in the market for high quality constructional articles dealing with communications and test equipment!



UKWberichte

TERRY BITTAN, Jahnstr. 14, P.O. Box 80, D-8523 BAIRSDFORF

Tel: W. Germany (9133) 855

Telex: 629887

Postgiro: 30455-858



## FILTER PRICE REDUCTIONS

**SUPER SELECTIVE:** (250kHz at 6dB) 8 pole crystal filters for the following

FT/FR101 TS520/900 TS800 £24.61, FT301 £17.26

FT101Z/901/902/980/707 £14.34

Wide choice of crystal filters in stock 6 & 8 pole 455KHz to 4.0MHz from £14.34

EG. 9.0MHz 8 pole 2.4KHz BW at 6dB Inc carrier crystal £17.34

**SPECIAL OFFER WHILE STOCKS LAST:**

9.0MHz LSB (8.9985MHz) 6 pole 2.4KHz Inc crystal £10.00

**MECH. FILTER:** 455KHz Kokusai MF31C 2KHz BW at 6dB 16 x 28.5 x 10.5mm £17.26

**106M7 MONOLITHICS:** 10.695MHz 7.5KHz BW at 6dB only £1.64

**45M15A MONOLITHICS:** 45.0MHz 15KHz BW at 6dB only £0.98

**CERAMIC FILTERS:** 2, 4 & 6 pole 455KHz alt £1.90

Many more in stock. £5.00 minimum order charge

All prices ex VAT Inc p&p

See next month's advertisement for crystals

IQD Limited, North Street, Crewkerne, Somerset TA18 7AR England  
Telephone: (0469) 74431 Telex: 46283



**REG WARD & CO LTD**  
**AXMINSTER, DEVON**



**South West's largest Amateur Radio dealer**

**Official agent for YAESU, TRIO, ICOM FDK**

- Complete range stocked • Full demonstration facilities
- Mail/telephone orders • Access/Instant credit/Barclaycard
- Wood & Douglas Kits

**Ancillary Equipment by:** AKD, AOR, Adonis, Bencher, BNOS, CapCo, Daifong, Daiwa, Drae, Hansen, Himound, JIL, Kenpro, Microwave Modules, muTek, SEM, Shure, Tokyo Hypower, Tono, Toyo, Welz, Wood & Douglas.

**Aerials by:** G-Whip, Hygain, Jaybeam, MET, Mini Products, Revco, TET, Tonna.



Reg G2BSW

1 Western Parade, Axminster,  
Devon EX13 5NY. Tel: (0297) 34918  
Open Tues-Sat 9.00-5.30. Closed Mon.

Redney G6LUJ





# PHOTO

# ACOUSTICS LTD. TEL: 0908 610625

58 HIGH STREET, NEWPORT PAGNELL, BUCKS, MK16 8AQ

# MAIL ORDER



| HF TRANSCEIVERS                  | £       | (p&p)  | 70cm TRANSCEIVERS cont.           | £      | (p&p)  | AERIALS cont.   | £      | (p&p)   |
|----------------------------------|---------|--------|-----------------------------------|--------|--------|---|--------|---------|
| Trio TS940S                      | 1795.00 | (-)    | Yaesu FT2700R Dual Band           | 499.00 | (-)    | Jaybeam TB3 HF 3 element  |        |         |
| Trio TS930S                      | 1395.00 | (-)    | Yaesu FT709R Handheld             | 285.00 | (-)    | Tribander Beam  | 230.00 | (10.00) |
| Trio TS430S                      | 750.00  | (-)    | Yaesu FT703R Handheld             | 255.00 | (-)    | Jaybeam TB2 HF 2 element  |        |         |
| New Trio TS440S HF Transceiver   | 950.00  | (-)    |                                   |        |        | Tribander Beam  | 155.25 | (10.00) |
| Trio TS830S                      | 898.75  | (-)    | <b>MORSE EQUIPMENT</b>            |        |        | Jaybeam TB1 HF Tribander rotary   |        |         |
| Trio TS630SP                     | 779.00  | (-)    | HK70B Straight Key                | 15.45  | (1.50) | dipole  | 83.37  | (10.00) |
| Yaesu FT9B0                      | 1759.00 | (-)    | HK707 Straight Key                | 16.00  | (1.50) | Jaybeam VR3 HF Vertical Tribander   | 55.77  | (10.00) |
| Yaesu FT757GX                    | 879.00  | (-)    | HK706 Straight Key                | 17.46  | (1.50) | (Full range of Jaybeam VHF and UHF aerials available. Please ring for details.) |        |         |
| Icom 745                         | 989.00  | (-)    | MK704 Squeeze Paddle              | 14.50  | (1.50) | Tonna 5 element 50MHz   | 37.90  | (5.00)  |
| Icom 735                         | 899.00  | (-)    | HK702 Marble Base                 | 32.50  | (2.00) | Tonna 9 element fixed 'N' skt   |        |         |
|                                  |         |        | MK705 Squeeze Paddle              | 26.50  | (2.00) | 144MHz  | 25.65  | (5.00)  |
| <b>ANTENNA TUNER UNITS</b>       |         |        | CW3 Practice Oscillator           | 11.65  | (1.00) | Tonna 9 element portable 144MHz   | 21.05  | (5.00)  |
| Trio AT230                       | 170.00  | (2.00) | Star Master Key Electronic Keyer  | 54.70  | (2.00) | Tonna 2 x 9 element 'N' skt 144MHz  | 41.05  | (5.00)  |
| Icom AT500 auto                  | 479.00  | (-)    | D70 Datong Tutor                  | 56.35  | (2.00) | Tonna 13 element portable 144MHz  | 32.67  | (5.00)  |
| Icom AT100 auto                  | 349.00  | (-)    | DRAE Morse Tutor                  | 52.00  | (2.00) | Tonna 17 element 'N' skt 144MHz   | 47.85  | (5.00)  |
| Yaesu FC757 auto                 | 318.00  | (-)    | BY1 Bencher Iambic Paddle with    |        |        | Tonna 9 element 435MHz  | 15.45  | (5.00)  |
| Yaesu FC700                      | 132.50  | (2.00) | black base                        | 67.45  | (3.00) | Tonna 19 element 435MHz   | 21.85  | (5.00)  |
| Welz AC3BM                       | 85.00   | (1.50) | BY2 Bencher Iambic Paddle with    |        |        | Tonna 2 x 19 element 435MHz   | 36.00  | (5.00)  |
| SEM Transmatch                   | 99.00   | (2.00) | chrome base                       | 77.00  | (3.00) | Tonna 21 element 432MHz   | 31.25  | (5.00)  |
| Mizuho KX3 SWL                   | 59.66   | (1.50) | BY3 Bencher Iambic Paddle with    |        |        | Tonna 21 element 438MHz ATV   | 31.25  | (5.00)  |
|                                  |         |        | GDLD base                         | 141.75 | (3.00) | Tonna 23 element 1250MHz  | 27.75  | (3.00)  |
| <b>HF RECEIVERS</b>              |         |        | <b>SPEAKERS</b>                   |        |        | Tonna 23 element 1296/1269MHz   | 27.75  | (3.00)  |
| Icom R71E                        | 789.00  | (-)    | Trio SP230                        | 51.43  | (2.00) | Tonna 55 element 1296/1269MHz   | 44.75  | (5.00)  |
| Trio R2000                       | 618.00  | (-)    | Trio SP430                        | 39.50  | (1.50) | G5RV full size  | 16.25  | (2.00)  |
| Trio VC10 VHF Converter          | 139.00  | (1.50) | Trio SP120                        | 33.33  | (1.50) | G5RV 1/2 size   | 14.25  | (2.00)  |
| Yaesu FRG8B00                    | 575.00  | (-)    | Trio SP40 Mobile                  | 18.08  | (1.50) | HB9CV 2 metres  | 3.95   | (2.50)  |
| Yaesu FRVBB00 VHF Conv.          | 90.00   | (1.50) | Trio SP50 Mobile                  | 17.63  | (1.50) | HB9CV 70cms   | 3.95   | (2.00)  |
| New Sony ICF2001D                | TBA     | (-)    | Yaesu SP55 Mobile                 | 16.50  | (1.50) | 2 metre Slim Jim  | 8.95   | (2.50)  |
| <b>VHF RECEIVERS</b>             |         |        | Icom SP3                          | 58.65  | (2.00) | 1-1 & 4-1 Baluns  | 12.95  | (2.00)  |
| AOR 2002                         | 435.00  | (1.50) | Icom SP4 Mobile                   | 25.30  | (1.50) | 3.7 and 7.1MHz Treps (pair)   | 9.50   | (2.00)  |
| Yaesu FRG9600                    | 465.00  | (-)    |                                   |        |        | Dipole centrepieces   | 1.80   | (0.50)  |
| Signal R532 Airband              | 209.76  | (1.50) | <b>MICROPHONES</b>                |        |        | Copper wire 50 metre rolls hard   |        |         |
| Signal R537 Airband Handheld     | 64.89   | (1.50) | Trio MC85                         | 87.58  | (2.00) | drewn   | 7.95   | (2.00)  |
| <b>2M FM TRANSCEIVERS</b>        |         |        | Trio MC60A                        | 71.25  | (2.00) | CX14DD masthead coaxial relay   |        |         |
| Alinco ALM 203E Handheld         | 249.95  | (2.00) | Trio MC80                         | 46.35  | (2.00) | (weatherproof)  | 39.95  | (3.00)  |
| (including 30W linear)           |         |        | Trio MC50                         | 39.66  | (2.00) | B285 2M 1/2 base aerial   | 22.00  | (2.00)  |
| Trio TM201A 25W                  | 296.00  | (-)    | Trio MC42S Hand Mic               | 18.10  | (1.50) | Large ferrite rings   | 0.85   | (0.50)  |
| Trio TM211E 25W                  | 398.00  | (-)    | Trio MC40S Hand Mic               | 17.05  | (1.50) | 5 amp power supplies  | 21.95  | (2.00)  |
| Icom 27E 25W                     | 399.00  | (-)    | Trio MC35S Hand Mic               | 18.65  | (1.50) | <b>MISC</b>   |        |         |
| Icom 27H 45W                     | 439.00  | (-)    | Trio MC55 Mobile                  | 45.25  | (1.50) | DRAE 12Amp PSU  | 86.50  | (2.50)  |
| Yaesu FT27DR 25W                 | 359.00  | (-)    | Yaesu MD1BB Desk                  | 75.00  | (2.00) | DRAE 24Amp PSU  | 125.00 | (3.00)  |
| Yaesu FT 27DRH 45W               | 399.00  | (-)    | Yaesu MH1B8 Mobile                | 17.50  | (1.50) | BNOS 12Amp PSU  | 115.00 | (2.50)  |
| Trio TR2600 Handheld             | 299.00  | (-)    | Yaesu YM24A Speaker Mic           | 27.00  | (1.50) | BNOS 25Amp PSU  | 169.00 | (3.00)  |
| Trio TH21E Handheld              | 189.00  | (1.50) | Yaesu YM49 (FT29DR) Speaker       |        |        | BNOS 40Amp PSU  | 345.00 | (5.00)  |
| Icom IC02E Handheld              | 299.00  | (-)    | Mic                               | 19.00  | (1.50) | MMT144/2B Transverter   | 129.95 | (2.00)  |
| Yaesu FT 209R Handheld           | 265.00  | (-)    | Yaesu MH12A2B (FT209/709/203/703) | 20.00  | (1.50) | MMT144/28R Transverter  | 236.80 | (2.00)  |
| Yaesu FT203R Handheld            | 225.00  | (-)    | Yaesu MF1A3B Mobile               | 23.00  | (1.50) | Mutek TVVF144a Transverter  | 249.90 | (2.00)  |
| <b>2M MULTIMODE TRANSCEIVERS</b> |         |        | Yaesu YH1 Headset                 | 17.00  | (1.50) | Mutek TWF 50a 6M Transverter  | 249.90 | (2.00)  |
| Trio TS711E Base 25W             | 770.00  | (-)    | Yaesu YH2 Headset                 | 17.00  | (1.50) | Mutek TVVF 50c 6M Transverter   | 209.90 | (2.00)  |
| New Trio TR751E 2M Multimode     | TBA     | (-)    | Yaesu SB1 Switch Box              | 18.50  | (1.50) | Mutek SLNA 145sb Preamp   |        |         |
| Trio TR9130 Mobile 25W           | 544.00  | (-)    | Yaesu SB2 Switch Box              | 16.00  | (1.50) | (FT290R)  | 31.90  | (1.00)  |
| Trio TS780 Base 2M/70cm          | 1061.00 | (-)    | Yaesu SB10 Switch Box             | 18.50  | (1.50) | Mutek SLNA 144s Preamp  | 41.95  | (1.00)  |
| Icom IC271E Base 10W             | 759.00  | (-)    | Icom HS10 Headset                 | 20.70  | (1.50) | New Murek GMFA144E Masthead   | 119.95 | (2.00)  |
| Icom IC290D Mobile 25W           | 519.00  | (-)    | Icom HS10SB Switch Box            | 19.55  | (1.50) | Daiwa CN410M 3.5-150MHz SWR   |        |         |
| Yaesu FT 290R Portable           | 369.00  | (-)    | Icom HS10SA VDX Unit              | 24.15  | (1.50) | Meter   | 53.30  | (1.50)  |
| Yaesu FT726R 2M Fitted           | 899.00  | (-)    | Icom SM6 Base                     | 39.10  | (2.00) | Daiwa CN460M 140-450MHz SWR   |        |         |
| <b>70cm TRANSCEIVERS</b>         |         |        | Adonis AM303G Desk                | 39.95  | (1.50) | Meter   | 57.75  | (1.50)  |
| Trio TS811E Base                 | 895.00  | (-)    | <b>COAXIAL SWITCHES</b>           |        |        | Daiwa CN620A 1.8-150MHz SWR   |        |         |
| Trio TM401A FM Mobile            | 350.00  | (-)    | SA450 2 Way SO239                 | 15.45  | (1.00) | Meter   | 73.50  | (1.50)  |
| Trio TW4000A Dual Band           | 580.00  | (-)    | SA450N 2 Way 'N' Type             | 19.95  | (1.00) | Welz SP220 1.8-200MHz SWR   |        |         |
| Trio TM411E FM + DCS             | 466.00  | (-)    | CH20N 2 Way 'N' Type              | 41.90  | (1.00) | Meter   | 59.00  | (1.50)  |
| Trio TR3600 Handheld             | 324.00  | (-)    | CH20A 2 Way SD239                 | 22.95  | (1.00) | Welz SP420 140-525MHz SWR   |        |         |
| Trio TH41E Handheld              | 220.95  | (1.50) | DRAE 3 Way SO239                  | 15.40  | (1.00) | Meter   | 69.00  | (1.50)  |
| Icom IC471E Base                 | 889.00  | (-)    | DRAE 3 Way 'N' Type               | 19.90  | (1.00) | Welz SP350 1.8-500MHz SWR   |        |         |
| Icom IC490E Mobile               | 579.00  | (-)    |                                   |        |        | Meter   | 79.00  | (1.50)  |
| Icom IC04E Handheld              | 299.00  | (-)    |                                   |        |        |   |        |         |
| Icom 3200E Dual Band             | 529.00  | (-)    |                                   |        |        |   |        |         |

GOODS NORMALLY DESPATCHED WITHIN 24 HRS.—PRICES CORRECT AT TIME OF GOING TO PRESS—E&OE

**SPEND UP TO £1,200 INSTANTLY WITH A PHOTO ACOUSTICS LTD CREDIT CHARGE CARD—APPLY FOR DETAILS**  
**PART EXCHANGE WELCOME, ASK FOR KERRY G6JZF, OR ANDY G4YOW**


Monday Friday 9.30-5.30—Saturday 9.30-4.30



APPROVED  
**TRIO**  
DEALER


# WARD ELECTRONICS

APPROVED  
**TRIO**  
DEALER

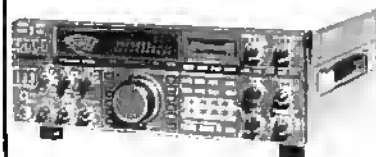


**NEW TRIO  
TS940S  
£1795**

**TRIO  
TS430S  
£750**



**Compact High Performance  
HF Transceiver**

**TRIO  
TS711E**



**2m  
ALL  
MODE**

de Luxe Base Station  
\* Promotional Price £770  
also TS811E 70cm version £895

**NEW**

## **DEWSBURY CMOS MEMORY KEYS**

Full range of Masterkeys  
and Codereaders available

## **SCARAB Radio Software**

Many new items for popular  
home micros

Amstrad · BBC · Sinclair etc.

## **MET Antennas**

For 6 metres  
2 metres  
and 70 cm

|                     |             |
|---------------------|-------------|
| <b>NEW T5440S</b>   | <b>£950</b> |
| TS830S              | £898        |
| TS530SP             | £779        |
| TS930S              | £1395       |
| TL922 Linear        | £1265       |
| SM220 Monitor Scope | £262        |
| R2000 Gen Cov Rec   | £518        |
| TR9130 2M All Mode  | £544        |
| TW4000A             | £580        |
| TR2600E             | £299        |
| TR3600E             | £324        |
| TH21E               | £189        |
| TH41E               | £220        |
| AR2002 Scanner      | £430        |

## **TM201A**

Remote Display  
Option £46



**£296**

## **WARD ELECTRONICS**

422 BROMFORD LANE,  
WARD END  
BIRMINGHAM B8 2RX  
TEL: 021-328 6070

CLOSED MONDAY

• KEYS • ROTATORS • SWR METERS • PSUs • ANTENNAS • RSGB BOOKS •

# M<sub>M</sub>M A COOL 100

For some time now, a large number of satisfied BNOS customers have been asking for a Linear Amplifier that gives a true 100 Watts on 70cms. 'Just like my two metre one' they say.


Now BNOS design engineers have developed a 100 Watt RMS Linear Amplifier that is more than worthy of its BNOS label.

These are now 3W, 10W and 25W input versions available in the form that has made their predecessors so popular. The LPM incorporates the usual BNOS Bargraph, Powermeter, the switchable GaAsFET low-noise pre-amp and our unique overdrive protection circuit.

The pre-amplifier really pulls in the DX whilst the highly efficient final stage ensures that you are one of the biggest signals around—continuously.

In fact, the only thing it will not do is heat your shack!

|             |         |               |         |
|-------------|---------|---------------|---------|
| L432-3-100  | £295.00 | LPM432-3-100  | £335.00 |
| L432-10-100 | £295.00 | LPM432-1-100  | £335.00 |
| L432-25-100 | £255.00 | LPM432-25-100 | £295.00 |
| L432-1-50   | £195.00 | LPM432-1-50   | £235.00 |
| L432-3-50   | £195.00 | LPM432-3-50   | £235.00 |
| L432-10-50  | £155.00 | LPM432-10-50  | £195.00 |

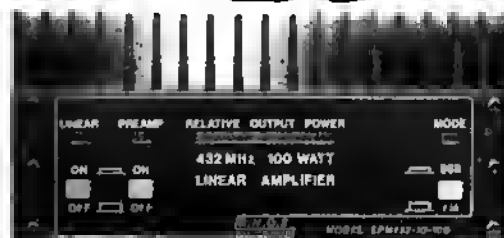

|                             |                     |
|-----------------------------|---------------------|
| <b>FREQUENCY RANGE</b>      | 430 to 440 MHz      |
| <b>OUTPUT POWER</b>         | 100W RMS ± 0.5dB    |
| <b>INPUT POWER*</b>         | 3W, 10W & 25W       |
| <b>POWER REQUIREMENTS</b>   | 13.8V, 20A          |
| <b>PRE-AMP GAIN</b>         | Typically 12dB      |
| <b>PRE-AMP NOISE FACTOR</b> | Better than 1 dB    |
|                             | *DEPENDENT ON MODEL |

Stand E9 & E11 at the  
NEC on April 5th & 6th

**B.N.O.S**  
ELECTRONICS

Please note new address  
and telephone number

**B.N.O.S. ELECTRONICS LTD, DEPT RC, MILL LANE, STEBBING, DUNMOW, ESSEX CM6 3SL. TEL (0371 86) 681**

# C. M. HOWES COMMUNICATIONS

EASY TO BUILD KITS BY MAIL ORDER



139 HIGHVIEW,  
VIGO, MEOPHAM,  
KENT OA13 0UT  
TEL: FAIRSEAT (0732) 823129

## Hello RadCom!

Despite the many thousands of kits we have sold over the last three years, there seem to be a number of people in amateur radio who haven't heard of us. This seems to be because quite a few RSGB members don't read any of the other magazines! So the time has come to expand the advertising budget, and introduce ourselves to RadCom readers. Hello!

### WHAT DO YOU GET IN A HOWES KIT?

All our kits contain a good quality fibre-glass PCB which has its holes drilled, its tracks tinned, and its parts locations screen printed on it for easy assembly. All board mounted components are supplied, as are full, clear instructions, parts list, circuit diagram etc. You do not have to be an "old hand" at construction to enjoy the pleasures of home brew equipment with one of our kits. Many would be constructors have chosen a HOWES kit as a first project, and found that not only was it enjoyable, it was successful too! Choose yourself a worthwhile project from our expanding range! The kits are also available as ready assembled modules if you prefer.

### HOWES QRP EQUIPMENT



If you listen around the QRP frequencies on 80M you will almost certainly know of the existence of C. M. HOWES COMMUNICATIONS! Hundreds of people are on the air with our CTX80 transmitter. Many are using it as part of a transceiver in conjunction with our DeRx 80 receiver and CVF80 VFO. If you have gained the impression that you can't work much at these

power levels, you should take a look at some of our customer's log books! Far more than just the odd one or two have worked twenty or thirty countries in the last couple of weeks on the air. I could hardly believe the USA call areas one customer listed as worked in under a week! QRP is certainly a satisfying challenge. Using our kits, you could build a super little rig for holiday and portable use, as well as for fun or QRP operating from the home station.

### HOWES CTX QRP CW TRANSMITTERS



Two versions are available, one for 80M, and one for 40M. One crystal is included, but there is space for two more on the PCB. The CVF VFOs can be used for full band coverage. Output power is adjustable up to about 5W on 80M and 3W on 40M. The design includes key-click suppression, and a five element low-pass output filter. The note is excellent.

CTX Kit: £12.95  
Assembled PCB Module: £18.95

### HOWES DeRx DIRECT CONVERSION RECEIVERS



The DeRx is a single band receiver, versions are available for 20 or 30M, 40, 80 and 160M. These receivers come with ready-wound coils and are very straightforward to build. They provide up to 1W of audio to drive a loudspeaker or headphones. A case and two tuning capacitors are the only major parts you need to add to finish your receiver. We have

adjustable tuning capacitors for all but the 160M version (approx. 50pF) at £1.50 each. Modes: SSB and CW.

DeRx Kit: £14.80  
Assembled PCB Module: £19.90

### HOWES CVF 40 or 80M VFOs



These fully featured VFOs have dual buffered outputs, and can drive both the DeRx and CTX to form a transceiver. Features include a stable FET oscillator, onboard voltage regulator, IRT (clarifier). A suitable tuning capacitor is available at £1.50.

CVF40 or 80 Kit: £9.30  
Assembled PCB Module: £14.90

### HOWES HC220—use your 2M rig on 20M!

Your 2M SSB/CW rig is magically transformed into an HF rig with the HC220! There is a good 10W of RF output from mismatch proof transistors, and the receive sensitivity and signal handling of the balanced mixer is good too. If you are competent with a soldering iron, you should be able to build this transverter. You don't need any fancy test equipment to align it, broadband techniques and fixed value filters help make this easy-HF mobile becomes feasible for anyone who can squeeze a 2M rig under the dash! Plus it's great for home station use too. I find it great fun to work all over the world with an FT290!

- ★ 5 to 50W adjustable 2M drive for full output.
- ★ RF or PTT switched.
- ★ 13.8 Volt DC operation.
- ★ 14.0 to 14.35MHz tunes as 144.0 to 144.35MHz on 2M.
- ★ No modifications to the 2M transceiver.

HC220 Kit: £48.90  
Assembled PCB Module: £79.90

### HOWES TRF3 SHORTWAVE BROADCAST RECEIVER

The HOWES TRF3 kit has been designed to bring the pleasures of a home built receiver within the reach of the newcomer, as well as the experienced constructor. It is simple and easy to build, covering 5.7 to 12.8MHz in three bands with a 50pF tuning capacitor (available at £1.50). In the early days of radio, all radios were TRFs, unless they were crystal sets! An ancient concept has been brought up to date with the TRF3, but it still provides the old thrill of hearing far away stations on a home built set!

- ★ Up to 2W of audio output.
- ★ Can operate with a large or small antenna due to switchable input impedance and attenuator.
- ★ Operates from 9 to 14V DC at approx 15mA quiescent.
- ★ Band and input selector switches included.
- ★ 7 pages of documentation.

This kit is designed to be educational, as well as good fun. The documentation includes a "how it works" explanation. In addition to the full, clear instructions etc. Use of the receiver, once it has been built is also an education! Comparing the news and political output of the various countries is fascinating! An excellent little project that appeals to the old timers as well as the newcomer.

HOWES TRF3 Kit: £13.90  
Assembled PCB Module: £18.90

### SOME OTHER HOWES PRODUCTS


| PRODUCTS                             | KIT    | ASSEMBLED |
|--------------------------------------|--------|-----------|
| ST2 Side-tone/CW Practice Oscillator | £7.30  | £10.80    |
| XM1 Crystal Calibrator (8 o/p)       | £16.80 | £21.30    |
| AP3 Automatic Speech Processor       | £15.90 | £21.40    |
| CM2 "hands free" Mic with VOGAD      | £10.25 | £13.75    |
| PA2/15 2M 10dB 15W Linear Amp.       | £18.90 | £23.90    |
| PA2/30 2M 8dB 30W Linear Amp.        | £22.90 | £27.90    |
| CO1 TX/RX for Linears                | £9.80  | £13.80    |

If you would like further information on any product, simply drop us a line, enclosing an SAE. We have an information sheet for each kit in addition to our general product information.

PLEASE ADD 80p to your total order value. Export prices are the same as above (except for airmail delivery outside Europe—add £2.00 per kit).

UK delivery normally within 7 days

73 from Dave G4KQH,  
Technical Manager.

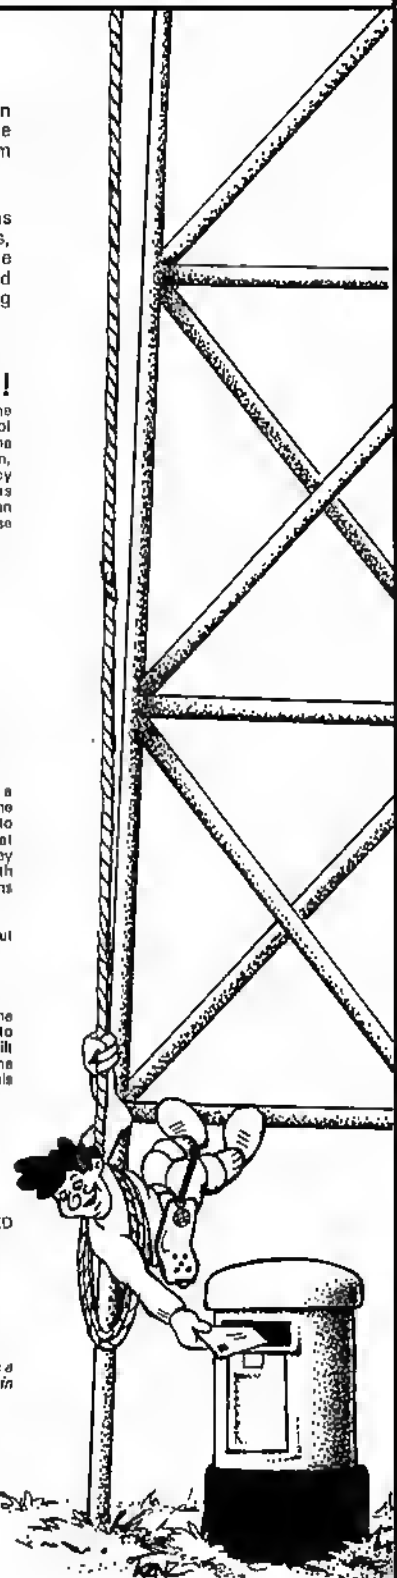

# TAR COMMUNICATIONS

## NEW PRODUCT NEWS



### TELESCOPIC MASTS

- ★ 4 sections 1.75" to 1.33"
- ★ telescopes from 3 to 9 mtrs
- ★ rotary guy rings
- ★ best quality ally tube

Ex Stock £42 + £3 carr

**WIDEBAND DISCONE**  
a must for the scanner enthusiast. Best quality components assembled in seconds complete with mast and mounting bracket

£29.95 + £2.50 carr  
100-500MHz

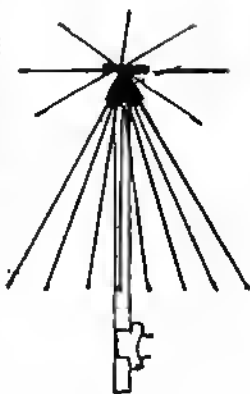

### THREE WAY ANTENNA SWITCH

- ★ Diecast Ally box
- ★ Separate Earth position
- ★ High Quality Ceramic Wafer Switch

£17.95 + £1.80 carr

### MORE 'TAR' BEST SELLERS

|                   | p&p           |
|-------------------|---------------|
| G5RV Full Size    | £16.25 + 1.80 |
| G5RV Half Size    | £14.25 + 1.80 |
| 5 ele ZL/2 Mtr    | £10.25 + 2.50 |
| 7 ele ZL/2 Mtr    | £14.25 + 2.50 |
| 12 ele ZL/2 Mtr   | £25.00 + 3.00 |
| New 7 ele ZL/70cm | £12.95 + 2.50 |
| H89CV/2 Mtr       | £3.95 + 2.50  |
| H89CV/70cm        | £3.95 + 2.50  |

### GUY ROPE KITS

Standard £8.95 H. Duty £9.95 + 2.50

### MASTS

4 section x 20' x 1 1/2" dia ally £12.95 + 2.50  
40" Tar Mast 2" dia complete £55 + 5.00

5' x 1 1/2" dia Fibreglass £5.00 + 1.80  
10' x 1 1/2" dia Fibreglass £10.00 + 2.00

### BALUNS

1:1 and 4:1 £12.95 + £1.80 p&p

Send £1.00 refundable against any purchase for our Catalogue listing our entire range

**THE COMMUNICATIONS CENTRE**  
KING WILLIAM STREET, AMBLECOTE  
STOURBRIDGE, WEST MIDLANDS, DY8 4EX  
STOURBRIDGE (0384) 390944/370987

# ALYNTRONICS



AUTHORISED  
**ICOM**  
DEALER



IC 751 — The latest H.F. transceiver from Icom


FT 757GX — the complete H.F. transceiver — with general coverage on receive



FT 726R — Yaesu's v.h.f. & u.h.f. multimode base station



IC 271 — Icom's v.h.f. multimode base station



Approved stockists for all of the following companies:  
ICOM — YAESU — K.D.K. — TONNA — DATONG — MICROWAVE  
MODULES — WELTZ — SHURE — HANSEN — KENPRO — C.O.E.  
— DAIWA — TONO — HY-GAIN — A.E.A. — A.K.D. — T.A.L. —  
I.C.S. — TASCO — G. WHIP — HI-MOUNO — S.M.C. ANTENNAS  
— WESTERN ANTENNAS

Always in stock, a large selection of plugs and sockets. Antenna mounting hardware — R.F. cables (H-100, URM 43, 67 and 76, 300ft Ribbon) plus 5, 6 and 8 core rotator cable

129 Chillingham Road, Newcastle-upon-Tyne

Tel: 091-276 1002

Mail Orders Welcome

Open Tues-Fri 10 am to 6 pm

Saturday 10 am to 5 pm



## AMATEUR ELECTRONICS UK

G6XBN  
G1RAS  
G8UUS

**R.A.S. (Nottingham)**  
Radio Amateur Supplies  
Tel: 0602 280267



### Visit your Local Emporium

Large selection of New/Used Equipment on Show

#### AGENTS FOR:

F.D.K.  
AZDEN  
ICOM  
YAESU  
VODAFONE &  
CELLNET

#### ACCESSORIES:

Welz Range  
Microwave Modules  
Adonis Mics  
Mutek Pre-Amps  
Barenco Mast Supports

DRAE products  
BNOS Linears and  
PSUs

**AERIALS:** Tonne, Halbar, New Diamond Range of Mobile Whips  
Jaybeam and Tiger Antennas

JUST GIVE US A RING

Monday: CLOSED Tuesday-Saturday: 10am to 5pm

3 Farndon Green, Wollaton Park, Nottingham  
Off Ring Rd, between A52 (Derby Road) & A609 (Ilkeston Road)

## QUARTZ CRYSTALS IN 24 HOURS

ANY FREQUENCY 2-50 MHz FOR £5.50 inc (C.W.O. only)

### STILL THE FASTEST SERVICE EVER!

Orders received before 10 am are completed and posted the **SAME DAY**. (State frequency and holder style). Close-tolerance crystals 1 to 110 MHz also available on 2/3 week delivery or **5 WORKING DAYS** on emergency. Our sales office welcomes your telephoned enquiries.



McKnight Crystal Company Limited  
Hardley Industrial Estate, Hythe, Southampton SO4 6ZY  
Telephone: 0703 848961 Telex: 47506 Crystl G.

# ICS

presents the brilliant **ALINCO**

## 2 METRE TRANSCEIVERS

ALR-206E 25 WATTS 2 METRE MOBILE

- 144-146 MHz FM
- 25 watts output
- 10 memory channels, band scan
- All programming from key pad on microphone

- Back lit LCD frequency display with LCD 'S' metre
- Frequency selection from front panel or microphone
- Mobile mount included

The ALR-206E features micro processor controlled versatility and programming from the microphone in a compact package.

ALR-206E Price: £295 inc VAT. (p & p £2.50)


Isopole 144 omni-directional antenna: Price £39.95 (p & p £2.50)



**ALM-203E**  
3/5 WATTS  
2 METRE  
HANDHELD

- 144-146 MHz FM
- 3 watts with NiCad, 5 watts with OC/OC converter
- 10 memory channels
- Programmable band scan
- Switchable 150-160 MHz Rx (marine band)
- 'S' metre
- Toneburst
- NiCad charger

ALM203E Price: £239 inc VAT (p & p £2.50)



**ELH-24B**  
Built-in Ga As FET Pre-amp  
Price: £69. inc vat  
(p & p £2.50)

**INCREDIBLE OFFER**  
save **OVER £58.00**  
purchase ALM-203E  
and ELH-24B together  
for just **£249.95**  
(p & p £4)

# ICS

ICS Electronics Ltd.  
PO Box 2  
Arundel  
West Sussex BN18 0NX  
Telephone: 024 365 590




Please send SAE for further details  
12 months parts +labour warranty  
Dealers throughout UK  
Prices may vary with  
exchange rate  
Callers by appointment

# Multi-Mode Audio Filters

FL2 or FL3 improve even the best of communication receivers by allowing optimum removal of noise from the signal you want to copy, whether SSB, CW, or RTTY. Extremely versatile yet easy to use and install.

Price: FL2 £89.70 FL3 £129.37  
Inc. VAT (as FL2 plus auto notch).

To order simply dial  
**0532 552461**  
or write with cheque or postal  
order to



Dept RC Datong Electronics Ltd., Spence Mills, Mill Lane, Bramley, Leeds LS13 3HE, England



Access/Barclaycard welcome — Fast delivery service

Catalogue and data sheets on any product available free on request. Dial **0532 552461**

# WE BUY FOR CASH

## All types of communications equipment

### Receivers . . . Transceivers . . . and all ancillary equipment

# ARE Communications Ltd

6 Royal Parade, Hanger Lane,  
London W5A 1ET. 01-997 4476

| STOCK CRYSTALS   |                       |          | QUARTZ CRYSTALS  |        |         | MADE TO ORDER CRYSTALS   |        |  |
|--|-----------------------|----------|--|--------|---------|--|--------|--|
| CRYSTALS FOR 2 METRES  |                       |          | FUNDAMENTALS   |        |         | OVERTONES  |        |  |
| HC25 £2.15 FOR ONE CRYSTAL, £1.95 WHEN 2 OR MORE PURCHASED               |                       |          | FREQUENCY RANGE  |        |         | FREQUENCY RANGE  |        |  |
| HC6 £2.15 FOR ONE CRYSTAL, £1.95 WHEN 2 OR MORE PURCHASED                |                       |          | PRICE  |        |         | PRICE  |        |  |
| TX CRYSTALS  |                       |          | CHANNELS IN STOCK  |        |         | 3rd OVT  |        |  |
| HC6/U 4.5 8MHz 30pF  | 44MHz SERIES RES      | RO TO R7 | 511, 520 TO 523  | £21.00 | 5th OVT | 21.00 TO 55.00MHz  | £4.55  |  |
| HC25/U 12MHz 30 & 40pF   | 44MHz SERIES RES      | RO TO R7 | S8, TO S23 & S37   | £15.00 | 5th OVT | 60.00 TO 110.00MHz   | £5.10  |  |
| HC25/U 18MHz 25 & 20pF   | 14/15 MHz 20 & 30pF   | RO TO R7 | S8, TO S23 & S32   | £11.90 | 5th OVT | 110.00 TO 125.00MHz  | £7.40  |  |
| HC25   | SCANNER XLS INQI SR91 | RO TO R7 | S8, TO S23 & S32   | £10.75 | 7th OVT | 125.00 TO 175.00MHz  | £10.00 |  |
| Full list available on request, please send SAE                          |                       |          | 1 TO 1.5MHz  |        |         | DELIVERY   |        |  |
| 4 METRE CRYSTALS FOR 70.26 IN HC5/U AT £2.40 each                        |                       |          | 2 TO 6.0MHz  |        |         | 2.0 TO 175.00MHz 2 to 3 weeks  |        |  |
| TX 8.78250 RX 29.78000   |                       |          | 6 TO 21MHz   |        |         | 5 TO 899.91Hz 6 to 8 weeks   |        |  |
| 70CM CRYSTALS £5.00/pr or £2.50 each                                     |                       |          | 21 TO 25MHz  |        |         | 1 TO 1.499MHz 3 to 4 weeks   |        |  |
| For Pye P11 P12 & P170 series Wood & Douglas and IDX MULTI UT1           |                       |          | Unless otherwise requested fundamentals will be supplied for 30pF load capacitance and overtones for series resonant operation                           |        |         | HOLDERS PLEASE SPECIFY WHEN ORDERING: also HC25 U supplied for XTLs above 3MHz |        |  |
| SUB433 21.500 RB0 RB2 RB4 RB6 RB10 RB11 RB13 RB14 RB15                   |                       |          | DISCOUNTS Price on application for 10+ units to same frequency spec or bulk purchase of mixed frequencies. We supply FREE trials for use in UK repeaters |        |         | COMMERCIAL CRYSTALS available on fast delivery and at competitive prices       |        |  |
| ALSO for MULTI UT1 ONLY SUB E SUB F                                      |                       |          | Please send for list stating interests   |        |         | I/M RGENCY SERVICE for XLS £1 to 125MHz. Add 10p charge for each XTL           |        |  |
| CONVERTER CRYSTALS IN HC18/U AT £2.85 each                               |                       |          | 22.000, 38.665, 42.000, 96.000, 101.000, 101.500, 105.655, 116.000   |        |         | Days refer to working days 4 days, £17. 6 days, £17. 8 days, £5. 13 days, £3   |        |  |
| FREQUENCY STANDARDS £2.75 each   |                       |          | HC6/U 1000kHz 3.50MHz 5.00MHz 10.00MHz 10.700MHz   |        |         | CRYSTALS SOCKETS HC25 10 70 etc HC6 10 25 MINIMUM DRD R CHARGE £1.50           |        |  |
| HC18/U 1000kHz 7.00MHz 10.70MHz 48.00MHz 100.00MHz                       |                       |          | Also HC6/U 455kHz 12.25 each   |        |         | unless ordered with 100pF  |        |  |
| TONEBURST, I.E. & MPU CRYSTALS IN HC18/U £2.25 EACH                      |                       |          | 7.168MHz 1for 1.50 Hz 100Hz, 10.245 1for 10.7 Hz 1   |        |         | TERMS Cash with order post inc to UK & Ireland Cheques & PO's ok to QSL L10    |        |  |
| 3.2768 4.000 5.0688 10.2400 14.3180 15.00000                             |                       |          | VAESU CRYSTALS for FT101's FT901 & etc £4.00 each  |        |         | A stamped address envelope with ALL enquiries please                           |        |  |
| Many available ex stock. A list is available on request. Please send SAE |                       |          | ALL PRICES ARE EX VAT PLEASE ADD 15%   |        |         | Telephone: 01318 4419 24Hz Ansalone: Dairford 10322) 330830                    |        |  |
| QuartzSlab MARKETING LTD   |                       |          | P.O. Box 19 Erith Kent DA8 1LH   |        |         | Telox. 8813271 GECOMS G Attention QUARTZSLAB                                   |        |  |



**QuartzLab**

MARKETING LTD

ALL PRICES ARE EX VAT PLEASE ADD 15%  
P.O. Box 19 Erith Kent DA8 1LH

Telephone: 01-318 4419 24Hz Ansafone: Dairford 103221 330830  
Telex: 8813271 GECQMS G Attention: QUARTSLAB1

## KW TEN-TEC CORSAIR II

No frills, "gimmicks" or unused facilities—For the serious Phone/CW operator who wants the lowest noise, cleanest and most selective amateur HF transceiver on the world market.



Other KW TEN-TEC winners

The ARGOSY II phone/cw transceiver

The CENTURY 22 cw only transceiver

The original KW TRAP DIPOLE and TRAPS, 8 ATU's, KW BALUN, and antennas

WRITE OR PHONE FOR DETAILS

## KW TEN-TEC LIMITED

Vanguard Works, Jenkins Dale, Chatham, Kent ME4 5RT  
Telephone: 0634 815173

## ANTENNES TONNA (F9FT)

YOUR NUMBER ONE CHOICE FOR  
6m, 2m, 70, 24 and 23cm ANTENNAS



We are pleased to introduce a new range of antennas (all in N below). The dipoles have been redesigned and now include a fully sealed 'N' connector—absolutely NO matching or tuning required. Also a new 1296MHz 55 element long Yagi. Send for full details . . . cos don't miss it!

|            |  |             |   |
|------------|--|-------------|---|
| 50MHz      | 5 element  | £37.87(al)  | Power Splitters complete with 'N' plugs |
| 20505      |  |             | 29202 2 way 144MHz £37.46(al)           |
| 144MHz     |  |             | 29402 4 way 144MHz £43.00(al)           |
| 20104      | 4 element  | £15.82(al)  | 29270 2 way 435MHz £35.59(al)           |
| 20808N     | 4 element crossed                                | £34.78(al)  | 29470 4 way 435MHz £41.01(al)           |
| 20809N     | 9 element fixed                                  | £25.62(al)  | 29224 2 way 1250MHz £30.46(al)          |
| 20809N     | 9 element portable                               | £27.92(al)  | 29424 4 way 1250MHz £32.18(al)          |
| 20818N     | 9 element crossed                                | £41.03(al)  | 29223 2 way 1296MHz £30.46(al)          |
| 20813N     | 13 element portable                              | £39.57(al)  | 29423 4 way 1296MHz £32.18(al)          |
| 20817N     | 17 element                                       | £47.83(al)  |   |
| 435MHz     |  |             | Portable aluminium telescopic masts     |
| 20909N     | 9 element  | £22.31(al)  | 50422 4 x 1m 3.7 metres £21.64(al)      |
| 20919N     | 19 element                                       | £28.75(al)  | 50432 3 x 2m 5.7 metres £25.21(al)      |
| 20438      | 19 element crossed                               | £36.01(al)  | 50442 4 x 2m 7.7 metres £38.76(al)      |
| 20921N     | 21 element 432MHz                                | £38.12(al)  |   |
| 20922N     | 21 element ATV                                   | £38.12(al)  | Golvenlod atool telescopic masts        |
| 144/435MHz |  |             | 50223 2 x 3m 5.9 metres £31.75(al)      |
| 20199      | 9519 element Oscar                               | £36.01(al)  | 50233 3 x 3m 8.8 metres £37.10(al)      |
| 1250MHz    |  |             | 50243 4 x 3.1.7 metres £91.98(al)       |
| 20624      | 23 element                                       | £27.72(al)  | 50523 5 x 3m 14.6 metres £124.44(al)    |
| 20645      | 4 x 23 element — power splitter — stacking frame | £144.74(al) |   |
| 1296MHz    | at 1296MHz Oscar Uplink                          |             | Stacking frame kits for 4 antennas      |
| 20623      | 23 element                                       | £27.72(al)  | 20014 20809 or 20818 £41.01(al)         |
| 20696      | 4 x 23 element — power splitter — stacking frame | £144.74(al) | 20041 20919 or 20921/22 £29.75(al)      |
| 20655      | 55 element                                       | £44.75(al)  | 20016 20623/24 both £17.79(al)          |
|            |  |             | 20017 20623/24 vert £14.39(al)          |

All antennas supplied complete with mast clamps for up to 50mm masts

FOR FULL SPECIFICATIONS OF OUR RANGE OF ANTENNAS SEND 40p FOR OUR CATALOGUE.  
PLEASE ADD CARRIAGE AS SHOWN IN £4.00. ID £2.20. ID £1.20. MAINLAND ONLY.

Cash with order. ACCESS, VISA CARDS—telephone your card number for immediate despatch. CALLERS WELCOME, BUT BY TELEPHONE APPOINTMENT ONLY, PLEASE.



UK DISTRIBUTOR

**RANDAM ELECTRONICS (R)**



12 Conduit Road, Abingdon, Oxon OX14 1DB. Tel: (0235) 23080 (24 Hours)





## FIRST THE GOOD NEWS

Our very successful **RX-4 Multimode receive program** is now even better.

On **CW** there are now selectable software filters and the autotrack system can be controlled to within certain speeds or locked altogether. As before, reception is possible to at least 250 wpm and the program speed can be directly set to that of the incoming morse. All these features provide superb performance, even with noise and ORM.

**SSTV** has improved synchronisation and selectable formats to receive any transmission, 128 or 256 lines, 8 or 16 Hz horizontal scan.

**AMTOR** has much more immunity to noise and ORM. Don't forget that this also receives commercial **TOR** transmissions.

**RTTY** and **AMTOR** have selectable unshift-on-space for when reception gets difficult. The **RTTY** program was so good already that this is the only thing that anyone could suggest to improve it!

And all this in addition to the top features it had already 4 baud rates of **RTTY**, any shift, normal or reverse. Text and pictures stored for recall, printing or saving to tape/disk. **RTTY** and **AMTOR** fine tune controls and on-screen frequency scale make tuning really easy and accurate.

## NOW THE EVEN BETTER NEWS

In spite of these considerable improvements, *the price is exactly the same* at **£25** on tape, **£27** on disk, making this program easily the most sophisticated, best value package ever for the SWL.

**SPECTRUM** (not available for 16k) needs no hardware at all.

**BBC-B, CBM64, VIC20** (+ at least 8k) use the same Interface as our **RTTY/CW** transceive program. For **CW** and **RTTY** they can also use a terminal unit.

## RTTY and CW TRANSCEIVE

You don't need an expensive terminal unit to get on the air with these modes, just our program and a very simple interface. The program is very easy to use and has all the right features. Split-screen, type-ahead, 26 saveable memories, **CW** Ident, auto **CR/LF**, 45, 50, 75, 110 baud, 170, 425, 850 Hz normal or reverse shift, **CW** to 250 wpm, **QSO** review and more.

The Interface kit can easily be built in 2 hours and no adjustments are needed. If you already have a **TU**, the program will work with that, too, giving the same features.

For **CBM64, BBC-B** and **VIC20** (+ at least 8k). Tape **£20**. Interface kit **£5**, ready-built with all connections for 1 rig **£20**, 2 rigs **£23**—state rig(s). **CW**-only version for **SPECTRUM** (No **QSO** review, no hardware needed) **£12**.

We also have the following programs available for **BBC-B, CBM64, VIC20, ELECTRON, SPECTRUM** Morse Tutor, Locator, Logbook, **RAE Maths**

See March advert for more details.


Any program on disk at **£2 extra** for **CBM64, VIC20, BBC-B**.  
140 or 80 track)

All programs come with full instructions. Prices include VAT and p&p by return 1st Class inland, airmail overseas. Channel Islands, Eire: deduct 13%.

# technical software

From Upper Llandwrog, Caernarfon, Gwynedd LL54 7RF  
Tel (0286) 881886

## MORSE KEY KITS

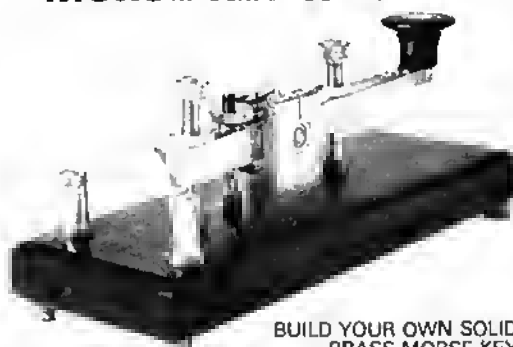

**BUILD YOUR OWN SOLID  
BRASS MORSE KEY  
ONLY £19.95 + £2.00 P&P  
(Excludes base)  
Goods in stock, by return**

**POLISHED WOOD BASES AVAILABLE £7.70 + £1 P&P**

Kit contains all components and instructions. Just provide a base and assemble, alternatively use our finished wood base, average assembly time is less than one hour and requires no special tools.

Ball race bearings essential for quality performance. Solid silver contacts. Precision contact adjustment using fine pitch threaded screws.

Please send S.A.E. for further information.



**R. A. KENT  
ENGINEERS**



243 CARR LANE, TARLETON, PRESTON, LANCs PR4 6YB.

Tel: Hesketh Bank (0774-73) 4998.

# SWINDON RALLY

**SUNDAY 11th MAY**

**OAKFIELD SCHOOL, MARLOWE AVENUE  
SWINDON**

Open 10 am

Details: G8SFM QTHR

Admission 50p

Tel: 066689 307



## HATELY ANTENNA TECHNOLOGY

1 Kenfield Place, Aberdeen AB1 7UW, Scotland

**GM3HAT**

**DIPOLE OF DELIGHT**

**CAPLANE**

### Six Metres Band

For the regulation 100W ERP max we have designed a monoband DB for 50MHz. It is the MP D2M 50 and is modestly priced at £8. Ideal for indoor or outdoor operation.

Popular Antennas: MP DQ 7/14/21/28L D25 MP CP 14/21/28L D22

Our antennas have established their popularity because of their reliability and low SWR. They don't need an ATU even with a fussy semiconductor PA. With tunable PA's they're a dream, once tuned to a band no more retuning even for large QSY.

### TVI Notes

1. As screen of coax works by conducting to "earth" the currents induced by the antenna of the HF rig, the better the conduction the better the liner is screened. So validate screen connection in viewer's plug. Also verify inner pin soldered, not folded in.
2. "Economy" coax has minimal copper in the braid, and leaks in HF (check by listening to 7MHz broadcast stations with piece of sole aerial. Change to professional quality coax (URM 70) and note reduction in signal). Suggest replacing down-lead to better quality coax. Say "new leader" to your complaint.
3. That you have the coax to your Dipole of Delight screwed tight and with an unbroken screen all the way.

Preprietor: Maurice C Hatley, MSc, MIEE, Chartered Electrical Engineer (GM3HAT)

## LOSING DX?

**ANTENNA FAULT? NOT getting out?**

Check **FAST** with an Antenna Noise Bridge and your receiver. **MEASURE** resonance 1-160MHz and radiation resistance 2-1000 ohms, just **TUNE** your receiver and **TURN** the resistance control to null the noise, then **SIMPLY READ** resonance from the receiver and radiation resistance from the bridge.

**ANSWERS**, no confusion with harmonics, no 10 second limit.

**ALSO**, measure phasing lines, RF resistance and hence Q of loading coils, preamplifier matching, or use as a noise generator.

**FUN-TO-BUILD** kit (ready-made to order) only **£22.40** includes ALL parts, case, pcb, pre-wound transformer, by-return postage (Europe same, Giro 21 923 4000) and list of other kits.

## CAMBRIDGE KITS

45 (RD) Old School Lane, Milton, Cambridge

# Versatower: The professionals' choice!

A range of telescopic towers in static and mobile models from 7.5 to 36 metres with tilt-over facility enabling all maintenance to be at ground level.

Designed in accordance with CP3 Chapter V, part 2: 1972 for a minimum wind speed of 85 mph in conditions of maximum exposure and specified by professionals world-wide where hostile environments demand the ultimate in design, quality and reliability.

**P40 Standard series**  
£503.00 inc. VAT (ex-works)  
**P60 Standard series**  
£611.00 inc. VAT (ex-works)



**Strumach Versatower Limited,**  
Portland House, Coppice Side,  
Brownhills, Walsall, West Midlands  
WS8 7EX, England.  
Telephone (0543) 374321  
Telex: 335243 SEL G.

Ask for details of  
our NEW 'E'  
Series Masts—  
Developed to  
give a low line  
(22ft) mounting  
height.

**Main agent:**  
South Midlands Communications Ltd.  
SM House, Rumbidge Street,  
Totton, Southampton,  
Hants SO4 4DP  
Tel. (0703) 867333

## GAREX THE SCANNER SPECIALISTS

### J.I.L. SX-200-N — THE SUPERIOR SCANNER

- \* The choice of the professionals
- \* AM + FM all bands
- \* Wide coverage: 26-88, 108-180, 380-514MHz
- \* 16 memories \* Positive action keyboard
- \* Proven reliability \* 12v DC & 230v AC
- \* S-meter & 96-108MHz converter available

£325

### REVCO RS-2000-E — THE VERSATILE SCANNER

- \* 70 memories \* AM + FM all bands
- \* Covers: 60-180MHz (no gap), 380-520MHz
- \* Search & store of active channels
- \* All the usual search & scan functions
- \* 12v DC & 230v AC operation
- \* Counts activity of selected channel

S-meter now  
available

£259

### J.I.L. SX-400 — THE PROFESSIONAL SCANNER

- \* Designed for easy plug-in expansion
- \* Basic coverage 26-520MHz (no gaps)
- \* AM + FM (manual, automatic or programmable)
- \* Computer interfacing for limitless memory, remote control & data logging
- \* Switchable channel spacing & I.F. bandwidths
- \* I.F. output terminals (10.7MHz & 455KHz)
- \* Specifications set by the professionals

£625

### ACCESSORIES FOR SX400:

- Regulated mains adaptor for SX-400 ..... £29.50
- SX232 (RS232 interface) Built-in "logging mode" ..... £224.25

### RF CONVERTERS (may also suit other receivers)

- RF8014 (800MHz-1.4GHz) I.F. output 300-500MHz ..... £225.00
- RF5080 (500-800MHz) I.F. output 200-300MHz ..... £225.00
- RF1030 (100KHz-30MHz) with CW & SSB ..... £299.00
- ACB300 (Auto antenna control box) ..... £115.00

### REGENCY HX2000 — THE HANDHELD SCANNER

- \* Covers: 60-90, 118-175, 406-496MHz
- \* AM + FM all bands \* 5, 10, 12½KHz steps
- \* All the usual scan & search functions
- \* 20 memories. Nicads, charger, flexiwhip antenna

£269

### REGENCY MX7000 — WIDE RANGE SCANNER

- \* 25-550MHz & 800MHz-1.3GHz
- \* WFM, NFM & AM all bands \* Superb sensitivity
- \* 20 memories \* 12 VDC operation

£369.00

### COMING SOON:

REGENCY MX8000: spec. as MX7000, but new keyboard, LED S-meter & up/down step control knob

£POA

NEW "RADAC" BROADBAND VHF/UHF RECEIVING AND TRANSMITTING ANTENNA - £69.95

### \* REVCO NE \*

A superb quality 16 element, all British made VHF/UHF broadband fixed station aerial from Revco. Ideally suited to all scanners and other VHF/UHF Receivers  
Covers 50-500MHz PRICE £29.95 inc

### ASK FOR OUR LIST OF SECONDHAND SCANNER BARGAINS

**RESISTOR KITS** a top selling line for many years. E12 series, 5% carbon film, 10w to 1m, 61 values, general purpose rating ¼W or ½W (state which).

- Starter pack 5 each value (305 pieces) ..... £3.10
- Standard pack 10 each value (610 pieces) ..... £5.55
- Mixed pack, 5 each ¼W + ½W (610 pieces) ..... £5.55
- Giant pack, 25 each value (1525 pieces) ..... £13.60

**DC/DC TRANSISTORISED INVERTERS** 12V input, 400V 200mA rectified and fully smoothed output ..... £9.50

This unit is a chassis section cut from used R/T equipment, tidied, fully wired & tested. Free-standing but no luxuries like cabinet. 24v version — same price. SAE for details.

We have in stock a very large range of spare parts for PYE RADIOTELEPHONES. Models include Olympic, Westminster, Whitehall, Europa, Mascots and PF70 Series. Parts also available for Cambridge, Vanguard etc. etc.

### SAE FOR FREE EXTENSIVE LIST



**MAIN DISTRIBUTOR OF REVCO PRODUCTS**  
PRICES INCLUDE UK P&P and 15% VAT  
Goods normally despatched by return



Phone now for details of our interest free credit

**GAREX ELECTRONICS**  
7 NORVIC ROAD, MARSWORTH, TRING,  
HERTS, HP23 4LS

Phone 0296 668684. Callers by appointment only



# USED AMATEUR EQUIPMENT?

**I Buy, Sell & Exchange!**

**SELLING?** WE HAVE VARIOUS METHODS OF ASSISTING YOU TO SELL YOUR USED EQUIPMENT!!

- We Will buy it from you! FOR CASH! Our offers are rarely beaten!! Phone Dave, G4TNY now, and see for yourself!!
- If our cash offer cannot tempt you, ask for full details about our NEW SELLING SERVICE!! We will undertake to sell your gear at an agreed market value, on a commission basis!! Are you prepared to stand by the condition and integrity of your used gear? Want to sell as quickly as possible, at the best price? PHONE US!!
- Whether you sell to us, or via our commission sales service, our computer generated lists of used gear are available free on receipt of an SAE, to any enquirer, that means today! NO MORE WAITING MONTHS FOR THE SMALL ADS TO APPEAR!!

**BUYING?** DUE TO THE OFFERS YOU SEE ABOVE, WE HAVE THE BEST SELECTION OF TOP QUALITY USED EQUIPMENT AVAILABLE, AT THE MOST COMPETITIVE PRICES!!

All our used equipment is fully tested by ourselves, whether sold by us, or on behalf of a fellow amateur, and warranted on the same basis. No matter what your requirement from the largest item to the smallest in Amateur Radio, you can save money by buying from our stock of TOP QUALITY Used Equipment. Phone us now!

Phone G4TNY, anytime between 9am and 7pm, Monday to Saturday, or send SAE for lists! Personal callers by appointment only, Please.

**PHONE (040 24) 57722**

MAIL ORDER

PART EXCHANGE

**G4TNY AMATEUR  
RADIO**

132, Albany Road, Hornchurch, Essex RM12 4AQ

**J. BIRKETT** 25 THE STRAIT, LINCOLN. Tel: 20767

VARIABLE POWER SUPPLY KIT 6 to 22 volt 1 Amp Consisting Of Mains Transformer, Regulator Board, LM317, 5K Variable Potentiometer With Instructions @ £4.95, P.P. £1.50. BRIDGE RECTIFIERS 100 Piv 10 Amp @ 95p, 100 Piv 20 Amp @ £1.30. GECALLOY RINGS FOR LF SUPPRESSION Int. Dia. 15mm, Ext. Dia. 28mm @ 38p. TRANSISTOR 445KHZ IF Transformers @ 25p, 5 for £1. X BAND GUNN DIODES With Data @ £1.65. SCHOTTKY X BAND DETECTOR DIODES Like 1N23 @ 45p. X BAND VARACTOR DIODES 2p. 1. or 4p. @ £1.65 each. SUB-MINIATURE WIRE ENDED S-BAND DETECTOR DIODE Test Freq. 3GHz @ 65p. RF TRANSISTOR BFW15A 1.5W, 1200MHz @ 75p each. FETS 3SK88 @ 60p, 3SK45 @ 60p, J304 @ 20p, BF256 @ 20p, TS 14 @ 20p. VMOS VNI OKM @ 50p, WM21 I @ 40p, VNI DLM @ 40p, VN90AA @ 80p. TELEPHONE DIALER CHIP With Data And Circuit @ 85p. TRANSISTORS 2N918 @ 25p, 2N2905A @ 30p, BSX61 @ 50p, 2N3866 @ 75p. ITT CRYSTAL FILTER Type 0140G 10.7MHz BW  $\pm$  3.75KHz @ £3.95. X BAND DETECTOR DIODES In L.I.D. Package For Micro-Miniature Assemblies @ £1.15 each 3 for £2.60. TRANSISTORS Similar to BFR91 @ 60p each. COMPUTER LEAD With 15 Pin O Type Plug And 16 Pin D1 Plug @ 50p. TRANSMITTING VARIABLE Similar to One Fitted In FT101 300p.J., @ £6.30.

WOOD AND DOUGLAS KITS ON STOCK, TIGER ANTENNAS AVAILABLE. ACCESS AND BARCLAY CARDS ACCEPTED, P.P. 60p UNDER £5 OVER FREE.



**ELECTRONICS (G8AQN)**

151a BILTON ROAD, RUGBY CV22 7AS

Tel: Rugby (0788) 76473

TF995/AS MARCONI signal generators 1-5-220MHz v/good cond £100.00. TF995/B5 Marconi signal generators 200KHz-220MHz v/good cond £130.00. RACAL 952 crystal calibrators with mains power packs tested £40.00. ADVANCE E2 SIGNAL GENERATORS 100KHz to 100MHz v/good cond £40.00. TF144H/4 MARCONI signal generators 10KHz to 72MHz £85.00, a few need repair £35.00 with manuals. TEKTRONIX 858A scope working order £35.00. R&S PDLYSCDPE swab 2, sweep generator up to 1200MHz as cond working but one channel noisy, with handbook (sensible offers). PMR ANTENNA'e-7 ele Yagi 145-155MHz 75ohm (Jaybeam) unused £10.00. UHF 460MHz 11 ele Yagi unused £12.00. 86MHz sleeve dipoles, unused £15.00. Mobile 1 wave antenna's cut for 81MHz, can be cut for up to 170MHz £25.00 ea.

Please note all above items must be collected by arrangement.

SERVICE MANUALS—for TEKTRONIX 'SCDPEs and plug-ins, plus others sent for list. PF1 POCKETPHONE receivers untested with circuit £3.50. BOLT-IN FEEDTHROUGH CAPS 1000pl 500v 3mm dia 10 for 50p. SOLDER-IN FEEDTHROUGH INSULATORS 4mm dia 100 for 75p. OXLEY PTFE feedthrough ins 3-5mm dia 6p each, 10 for 50p, 240pl and 500pl bolt-on anode blocking caps 5Kv wkg ideal VHF/UHF valve linear's, £2.50 ea. 'N' plug 50 ohm right-angle type ex-equip good cond £1.50. MAGNETIC DEVICES type 354 aerial 12v relays OK up to 200MHz @ 75 Watts s.p.c.o. £1.75 ea, 2 for £3.00. 2-25pl 10mm dia 10mm trimmers (special offer) 10p ea, 50 for £2.50, 100 for £4.00. Mullard 1-10pl film trimmer 7mm sq 15p ea, 10-80pl compression trimmer P.C. mount OK RF up to 50 Watts 25p. 10-7MHz SSB CRYSTAL FILTERS (less carrier) at £12.00. 10-7MHz SSB crystal filter LSB only, £6.00 each with data sheet, 2-3v 25Ah CYCLOTRON BATTERIES unused list price over £18.00 our price only £5.00 ea, buy six to make nice 13-8v pack £25.00 post up 1e 20p plus £2.00 over 2 post paid. CERAMIC TRIMMERS 10mm dia 10-40pl lagenda sp offer 10p ea, 15 for £1.00. 2GHz TUNNEL DIODES SFD4-163 £1.00 ea, 4 for £3.00. 3SK97 gaset £2.20, 3SK81 mosfet 85p, BFR84 mosfet 50p, RF POWER—2N5070 24v 25 Watt SSB 30MHz, £5.00. PT4236A 1 Watt 175MHz 12v TO39 case 75p. PT4555 25 Watt @ 144MHz 6db gain 12v £6.00. P14236C 35 Watt 68MHz 12v 7db gain OK 50MHz £6.00. PT4577 UHF power approx 2 Watt 70cms no info so £1.50 ea. PT 4236B 11 Watt 88MHz 10db gain 12v £4.00. FX1115 beads 10 for 20p.

Many bargains for callers to our shop including loads of test equipment PCBs mixed bags of components etc plus a complete range of YAESU/MUSEN products. Opening times 9.30am to 5.30pm lunch 1.00 to 2.30pm.

## J.E.P. ELECTRONICS

MORSE READER PROGRAMMES  
SPECTRUM DRAGON VIC 20 ATARI 600/800XL MSX COMPUTERS  
BBC B CBM64 ZX81/16K AMSTRAD 464  
Sinclair computers require NO interface. Others use single one transistor 18CI071 device. Programmes self tracking 8/30 WPM. All connections to existing sockets. Cassette with full instructions and interface circuit (where required) £5.00 inc. p. 5p. Interface built and tested £2.50 inc. p. 5p.

### MORSE TRANSCIEVE

For your 48K SPECTRUM a full C.W. transceive programme. Full type ahead facility, even while receiving. Pre-programmable memories can be called at any time. Lock the sending speed to the received speed, or choose your own. Self tracking 8/30 WPM. On HF bands a suitable filter will improve reception. Programme on cassette with instructions and later circuit £8.50 inc p. 5p. Ready built filters, see below.

### RTTY TRANSCIEVE

For the 48K SPECTRUM. Menu driven, 10 programmable memories, split screen, Morse ident, 4 baud rates etc. etc. NO TERMINAL UNIT, just a filter unit. Cassette with instructions and later circuit £8.50 (see below for ready built filters.)

### FILTER UNITS

|   |  |        |
|---|--|--------|
| RTTY ONLY   | Built, tested and fitted with leads. (No plugs.)   | £6.00  |
| C.W. ONLY   | Built, tested and fitted with leads. (No plugs.)   | £7.00  |
| RTTY/C.W.   | Switchable, dual purpose filter, supplied boxed and fitted with plugs to fit your Spectrum.  | £11.50 |
| RTTY/C.W. SUPER                                       | Specification as above but with addition of L.E.D. circuit for perfect tuning.   | £13.50 |
| If not ordered with software, advise software origin! |  |        |
| BASE TERMINAL UNIT                                    | CW/RTTY (170 & 850Hz shift) OUTPUTS: - AUDIO, TTL, reverse TTL, open collector (normal & reverse) requires 12-15V supply. S.A.E. brings full spec. | £45.00 |

With the exception of the last unit the filters require a nine volt supply. Battery clips are fitted. Battery not supplied.

S.A.E. please for full details of any or all of our goods.

ALL GOODS DESPATCHED SAME DAY BY FIRST CLASS POST (OVERSEAS ADD £1.00 for AIRMAIL.)

J.E.P. ELECTRONICS, NEW ROAD COMPLEX, KIDDERMINSTER, DY10 1AL. Phone 05621 753893



**JAYCEE ELECTRONIC  
JOHN GM30PW**

20 Woodside Way, Glenrothes, Fife KY7 5DF

Phone 0592 756962

Open 5 days - Tues-Sat 9am-5pm

Out of Hours Service (0333) 29232

Quality secondhand equipment in stock  
FULL RANGE of TRIO and YAESU goodies.

Jaybeam—Microwave Modules—L.A.R.

RSGB books—Daiwa—Welz—TET—BNOS

Agent—D. GREY (G8TFL), 7 CEMETERY LOANING,

BERWICK-ON-TWEED. Tel. (0289) 307116



# ICS

## At last! AX.25 Packet Radio at an Affordable Price



PK-64



PK-80

From A.E.A. Inc. in America comes an exciting breakthrough in Packet Radio price and flexibility!

The PK-80 has an RS232 interface and inbuilt packet radio modem. It is fully equivalent to the TAPR TNC2 Packet Controller and implements the AX.25 2.0 protocol. It includes hardware HDLC for full duplex operation and comes completely wired and tested and guaranteed for one year.

The PK-64 operates with Commodore 64, 128 or SX64 computers and gives AX.25 version 2.0 Packet Radio, AMTOR, RTTY, CW and ASCII transceiver all in one package.

Exceptionally user friendly, this hardware/software package gives split screen operation and endless operator help features. This has got to be the most comprehensive amateur radio software package ever written! The V.H.F. Packet Radio modem comes as standard; the H.F. modem and tuning indicator is a user fittable option.

PK-80 £239 inc. VAT p & p £4.00

PK-64 £239 inc. VAT p & p £2.50

HFM-64 modem £100 inc. VAT p & p £1.00

# ICS

ICS Electronics Ltd.

PO Box 2

Arundel

West Sussex BN18 0NX

Telephone: 024 365 590



Please send SAE for further details

12 months parts + labour warranty

Dealers throughout UK

Prices may vary with  
exchange rate

Callers by appointment

APPROVED  
**TRIO**  
DEALER

## STEPHENS-JAMES LIMITED

47 Warrington Road, Leigh WN7 3AE (0942) 676790



TRIO TS930S  
HF Transceiver

|        |         |        |         |         |          |         |          |
|--------|---------|--------|---------|---------|----------|---------|----------|
| TS830S | £898.00 | PS430  | £139.00 | AT930   | £178.87  | TR2600E | £299.00  |
| AT230  | £170.65 | TS130S | £633.00 | TR2500  | £245.00  | TS530SF | £779.79  |
| SP230  | £51.43  | R2000  | £518.73 | TS780   | £1061.28 | TR9130  | £544.73  |
| VFD230 | £292.00 | HS5    | £23.39  | TW4000A | £588.34  | SW200A  | £32.67   |
| TS430S | £750.00 | TS711E | £770.74 | TM201A  | £296.09  | TS930S  | £1395.00 |
| TH21E  | £189.30 | TL120  | £195.29 | TM401A  | £350.91  | TH41E   | £220.95  |
| R600   | £323.78 | SP120  | £30.74  | TR3500  | £270.00  | TS811E  | £895.00  |
| SW100A | £42.95  | SW100B | £42.95  | VC10    | £139.00  | TS940S  | £1795.00 |

FULL RANGE OF TRIO ACCESSORIES STOCKED



TRIO R2000  
General Coverage Receiver

The only official stockist of Trio equipment in the North West

### STATION ACCESSORIES (Inc post)

|                                   |         |
|-----------------------------------|---------|
| SWR50 Twin SWR meter              | £20.50  |
| OL150 150W Dummy Load             | £120.00 |
| Heavy Duty magnetic mount         | £18.50  |
| Pair high power antenna traps     | £17.25  |
| Heavy Duty dipole centrepiece     | £3.95   |
| LF30A Low Pass Filter             | £28.00  |
| VHF Wavemeter                     | £27.75  |
| WELZ SP5M swr/power               | £41.00  |
| WELZ SP350 swr/power              | £79.00  |
| CN630 swr/power                   | £99.00  |
| CN419 Antenna Tuner               | £178.00 |
| CN518 Antenna Tuner               | £260.00 |
| CN410M 3.5-150MHz swr             | £54.00  |
| CN450M 140-500MHz swr             | £58.00  |
| HP4A High Pass Filter             | £7.50   |
| AT100 SWL ATU                     | £54.50  |
| HK608 Morse key                   | £18.50  |
| Lightweight Antenna Rotator       | £42.00  |
| MK704 Twin Paddle                 | £16.57  |
| Daikwa 30 Amp Power Supply        | £199.00 |
| CN620A 1-8-150MHz SWR/Power Meter | £75.00  |
| Pair 7, 1MHz Antenna Traps        | £10.50  |
| HS508 1:1 Balun                   | £21.00  |
| Mag Mount - SO239                 | £15.50  |
| Gutter mount load                 | £12.00  |
| Daikwa 12 Amp Power Supply        | £32.00  |

Stockist for Jaybeam, Tonna, Datong, Yaezu, G-Whips, Mic Modules, Balcom, Daikwa, Kenpro, AKD, TET, JRC.

Full range of aluminium tubing, lashing kits, clamps etc. etc.

### AR2002 SCANNING RECEIVER

Updated version of the best selling scanning receiver the AR2001. Frequency range 25 to 550MHz plus new band 800 to 1300MHz. Improved keyboard. Front panel knob for frequency stepping. LED "S" Meter. Socket for RS232 interface unit. Specifications as the AR2001. PRICE £435.00



TS430S HF Transceiver

### ANTENNAS

|                                   |         |
|-----------------------------------|---------|
| Jaybeam VR3 Vertical              | £55.78  |
| Jaybeam TB1 Dipole                | £83.38  |
| Jaybeam TB2 Tribander             | £155.25 |
| Jaybeam TB3 Tribander             | £238.00 |
| Mini Products HQ-1 Mini-beam      | £199.00 |
| Jaybeam C5/2M Co-linear           | £96.00  |
| DCP5 10-80m Vertical              | £149.00 |
| GPV-5 2m Co-linear                | £47.36  |
| GPV-7 70cm Co-linear              | £37.50  |
| TET 2 Element Tribander Mini-beam | £169.50 |
| TET 3 Element Tribander Mini-beam | £230.00 |
| REVCON 30-50MHz Discone Ant       | £31.50  |
| Full size G5RV antenna            | £16.85  |

FULL RANGE OF PUBLICATIONS IN STOCK RSGB, ARRL, ETC.

### TR9130 two metre all-mode transceiver

The TR9130 is now a classic rig—so popular that to have one on the second hand shelf is rare. 25 watts on SSB, FM and CW, green frequency display, six memories, two VFOs and memory scan make the TRIO TR9130 ideal for either mobile or base station operation. TR9130 . . . £544.00 inc VAT.



### TM 211E/411E FM VHF/UHF mobile transceivers

By taking the popular TM201A and TM401A and adding DCS and a tiltable front panel, TRIO have produced higher specification transceivers. Even easier to fit in tight locations, the TM211E and TM411E are transceivers designed to cope with today's crowded bands.

TM211E . . . £398.00 inc VAT

TM411E . . . £466.00 inc VAT



# muTek limited

—the rf technology company

Dept. RC, Bradworthy, Holsworthy, Devon EX22 7TU (040 924) 543



## The range

|            | £      |            | £     |
|------------|--------|------------|-------|
| TVHF 230c  | 208.90 | RPCB 251ub | 89.90 |
| TVVF 50c   | 208.90 | RPCB 271ub | 94.90 |
| TVVF 50e   | 249.90 | GC1F 107ub | 59.90 |
| TVVF 144a  | 249.90 | 1BFF 144u  | 24.90 |
| SLNA 50s   | 49.90  |            |       |
| SLNA 144a  | 41.95  | 1BFF 432u  | 24.90 |
| SLNA 146sb | 31.90  |            |       |
| GMFA 144a  | 129.90 | XBP 700ub  | 4.40  |
| GLNA 432a  | 159.90 | ATCS 500   | 34.90 |
|            |        | VFAT 206   | 22.40 |
| GLNA 433a  | 89.90  |            |       |
| BLNA 432a  | 14.90  |            |       |
| BB5A 500u  | 34.90  |            |       |
| RPCB 144ub | 84.90  |            |       |

ALL PRICES INCLUDE VAT AT 15%

£60E

## GUIDE TO FACSIMILE STATIONS

(6th edition)

128 pages with numerous figures £10 or DM 30. ISBN 3-924509-66-2

The reception of meteorological transmissions by radio amateurs is now approved by most national telecommunication administrations. One field of these transmissions by satellites and stations from all over the world are the facsimile broadcasts of meteorological charts, which are of vital interest for navigation at sea and international aviation. Following the request of a number of long-time users of my various manuals, I decided to resume the publication of my former FAX Frequency List, now including a lot of new items.

The numerical frequency list covers 346 frequencies—from VLF to UHF—of FAX stations which have been monitored in 1985 and 1986. Frequency, call sign, name of the station, ITU country/geographical symbol, technical parameters of the emission, and details, are listed. All frequencies have been measured exact to the nearest 100 Hz.

The alphabetical call sign list covers 223 call signs, with name of the station, ITU country/geographical symbol, and corresponding frequency (—ies).

Additional chapters cover

- ★ Alphabetical list of detailed schedules to the minute of 94 FAX stations on 340 frequencies, including Bracknell programmes 1 and 2, and Northwood.
- ★ Comprehensive list of equipment on the market for both FAX and meteorological satellite reception, with photos and manufacturer's addresses.
- ★ Detailed explanation of the technique used for the transmission of FAX pictures.
- ★ Regulations on technical characteristics of FAX equipment, including all CCITT and WMO standard test charts.
- ★ Comprehensive list of both geostationary and polar-orbiting meteorological satellites, with full technical data. Detailed explanation of APT PREDICT and FANAS polar-orbiting satellite position data codes.
- ★ Radio amateur FAX activities.
- ★ 201 abbreviations.
- ★ 50 station addresses in 35 countries.
- ★ 50 sample charts and their interpretation.

Further publications available are Guide to Utility Stations and the Supplement Service thereto, Radioteletype Code Manual, Air and Meteor Code Manual, etc. Write for detailed catalogue of publications on commercial telecommunication on shortwave. All manuals are offset printed and sold bound in the handy 17 x 24 cm format, and of course written in English.

The price includes airmail postage to anywhere in the world. Payment can be by cheques, cash, or International Money Orders. Postal Giro Account: Stuttgart 2093 75-709. Dealer inquiries welcome—discount rates and pro forma invoices on request. Please order from:

Klingensuss Publications, Hagenloher Str. 14, D-7400 Tuebingen, Fed. Rep. Germany. Tel: 01049 7071 62830

## MANUFACTURERS SURPLUS STOCKS

Electronic Components, Test Gear, Radiotelephones, Computers, Photographic and Video Equipment. All at knockout prices. Export and Trade Enquiries welcome. Catalogues available from:

B. Bamber Electronics, 5 Station Road, Littleport, Cambs.  
Phone: Ely: (0353) 860185

## BRAND NEW COMPONENTS BY RETURN OF POST

VAT Inclusive Postage 20p (Free over £5). List Free

**HIGH STABILITY MINIATURE FILM RESISTORS 5% Tolerance**  
1W E24 Series 0.5R to 10M 1p (75p/100 one value) 0.125W E12 Series 10R to 10M 2p  
0.5W E24 Series 10R to 10M 1p 1.0W E12 Series 10R to 10M 5p  
1W metal film 10R to 10M 5% E12 series 2p 1% E24 series 3p  
Multis or equivalent Subminiature Ceramic Disc capacitors 100V E12 Series  
2% 1-8p to 47p 3p 2% 56p to 330p 4p 10% 390p to 4700p 4p  
Pilot Ceramic Capacitors 50V working for vertical mounting  
E12 Series from 22p to 1000p then E6 series 1k 5p to 47k 1p 2p  
Miniature Polyester capacitors 250V working for vertical mounting  
0.1, 0.15, 0.22, 0.33, 0.47, 0.68 4p 0.1 5p 0.15 & 0.22 6p  
0.33 & 0.47 8p 0.68 10p 1.5 20p 2.2 22p  
**ELECTROLYTICS Wire Ended (Mtds/Volts)**  
47/50 5p 10/50 5p 47/16 6p 100/25 7p 220/25 8p 470/40 16p  
10/50 5p 22/16 6p 47/25 8p 100/50 8p 220/50 10p 1000/15 15p  
2/250 5p 22/25 6p 47/50 6p 150/16 7p 470/16 11p 1000/25 25p  
4/750 5p 22/50 6p 100/16 7p 220/16 8p 470/25 11p 1000/40 35p  
**TANTALUM BEAD ELECTROLYTICS Subminiature Vertical Mounting (Mtds/Volts)**  
0.1/35 14p 2/35 15p 15/16 20p 22/16 30p 47/16 80p  
0.22/35 14p 4/75 14p 15/25 35p 22/25 35p 68/3 30p  
0.47/35 14p 4/75 15p 22/6 20p 33/10 30p 100/3 35p  
10/35 14p 10/25 20p 22/10 25p 47/6 30p 220/16 120p  
**POLYSTYRENE Capacitors 63V working E12 Series Long Axial Wires**  
10p to 820p 3p 1kpt to 10kpt 4p 12kpt 6p  
**TRANSISTORS**  
BC107/8/9 12p BC547/8/9 8p BC212L 10p BFY50/51/52 20p BFX88 25p  
BC147/8/9 10p BC557/58/9 8p BCY70 15p 2N2926 7p BSX196/20 15p  
BC157/8/9 10p BC182L 184L 10p BF195/7 10p 2N3055 50p BD135/66 25p  
8 pin i.c.s. 741 20p 555 22p Holders 8 pin 9p 14 pin 12p 16 pin 14p 28 pin 25p 40 pin 40p  
**DIODES tp tv./amps!**  
75/25mA 1N4148 2p 800/1A 1N4006 6p 400/3A 1N5404 14p 115/15mA OA91 6p  
100/1A 1N4002 4p 1000/1A 1N4007 7p 60/1-5A 51M1 5p 100/1A Bridge 25p  
400/1A 1N4004 5p 1250/1A BY127 10p 30/45mA OA90 6p 30/150mA AAY32 8p  
200mA Diodes E24 series 400mV 3V3 to 33V to 33V 8p 1 watt 3V9 to 33V 12p  
LEDs Red, Green, Yellow 3 & 5mm, 10p. 8mm, 35p. Glowmets 3 & 5mm, 2p  
Fuses 20mm glass 100mA to 5A. Q Blow 5p A/Surge 8p Holders 6p. t.p.c. or chassis!  
High speed p.c.b. drills 0.8, 1.0, 1.3, 1.5, & 2mm 25p. 12V Drilling machines £6.50  
The C.R. Supply Co. 127 Chesterfield Rd, Sheffield S6 0RN. Tel: 557771

## UPPINGTON

### COMMUNICATION ELECTRONICS

#### G2BAR HAM BAND AERIALS

| 6 metre Yagi Folded Dipole 4 element | 2 element | 3 element |
|--------------------------------------|-----------|-----------|
|                                      |           |           |
| 10 metre Yagi GAMMA MATCH            | £56.00    | £66.70    |
| 15 metre Yagi GAMMA MATCH            | £68.00    | £80.50    |
| 20 metre Yagi GAMMA MATCH            | £88.50    | £103.50   |

These Antennas are made in BRISTOL.  
Please send for leaflet.

### AMATEUR ELECTRONICS UK

12/14 PENNYWELL ROAD, BRISTOL BS5 0TJ  
Telephone: Bristol (0272) 557732/558578



## CLASSIFIED ADVERTISEMENTS

Classified advertisements 35p per word (VAT included), minimum £5.60

Box Number £2.00 extra to wordage or minimum.

Semi-display 1/8 page 21" x 3 1/2" (57 x 91mm) £87.00  
3/32 page 1 1/2" x 3 1/2" (42 x 91mm) £67.00  
1/16 page 1" x 3 1/2" (26 x 91mm) £47.00

Please write clearly. No responsibility accepted for errors.

Latest date for acceptance—7 weeks before 1st of issue month.

All classified and semi-display advertisements MUST be prepaid.

Copy and remittance to: M. J. HAWKINS G3ZNI, RSGB Advertisements,  
PO Box 599, Cobham, Surrey KT11 2QE.

Cheques should be made payable to RSGB.

Members' Ads must be sent to "Members' Ads," RSGB Hq.

## FOR SALE

OSL CARDS printed to your own specification on white or coloured gloss card. Send SAE for sample pack to: The Caswell Press, 11 Barons Way, Woodhatch, Reigate, Surrey.

AMIGON TOROIDAL CORES, ferrite rings for TVI filters, ferrite beads. Send SAE for data and prices. SMC (TMP Electronics), Unit 27, Pinfold Works, Pinfold Lane, Buckley, Clwyd.

DSL & LISTENER CARDS. Quality printing on coloured and white gloss card at competitive prices. SAE for samples. S. M. Talham, "Woodside", Orchard Way, Fontwell, Arundel, West Sussex.

G5RV TYPE AERIALS. Half-size £13.50, Full-size £15.50. New Hand Drawn Copper Aerial Wire, 140ft 14swg £7.90; 50 metres 16 swg £6.90. Enamelled soft copper wire 10 metres 12swg £3.50; 50 metres PVC covered Aerial wire £4.20. Ceramic Egg Insulators, 40p. Guy rope, 4mm Polypropylene, 50 metres £3.95; 4mm Nylon 50 metres £6.90. 1Kw 1:1 Baluns £13.00. All items post paid. S.M. Talham G3RSY, 1, Orchard Way, Fontwell, Arundel, West Sussex.

PERSONALISED OSL CARDS. 1000 £15.00; 5000 £50.00. 5000 gloss in two colours £70.00. Send SAE for samples. DIY OSL's/SWL's—state which!—100 mixed designs/colours, £2.50. C.W.O.J.O. Cards, 89 Derwent Street, Blackhill, Consett DH8 8LT.

50m (185ft) AERIAL WIRE. Strong PVC covered copper only, £4.40 inc postage. W. H. Westlake, Clawton, Holsworthy, Devon.

DSL CARDS. Gloss or lined cards. SAE for samples to Twrag Press, Penybont, Gellidan, Blaenau Ffestiniog, Gwynedd.

ALL THE FAMOUS MOSLEY ANTENNAE. TA33Jr, Mustang, Atlas, V-3Jr, TD-3Jr, Booms, Verticals, etc. Also spares available only direct from us. Send £1 for our Handbook showing all Antennae. Mosley Electronics, 196 Norwich Road, New Costessey, Norwich NR5 0EX.

G4TJB DSL CARDS. Personal and standard designs. SAE samples, 100 mail colour DIY £2.50, gloss £3.50, Logbooks £2.20 (mobile £1.20). Buro envelopes £1.00 (20), letterheads A5 £7.00 (100), A4 £11.00. G. C. Patterson, 10 Rowdon Olive, Sullon Coldfold, Birmingham B74 2AG.

WAVEGUIDE, FLANGES & DISHS. All standard sizes and alloys (new material only) from stock. Special sizes to order. Call Earth Stations, 01-228 7876, 22 Howle Street, London SW11 4AR.

OSL CARDS. Try me for quality and price. SAE for samples. A. W. Bailey (G3YN), Brean Down Press, Wick Lane, Lymington, Somerset.

HIGH CLASS OSL CARDS. Keen prices. SAE for samples and prices to J. S. Coates, Dept RC, 57 Worrall Street, Morley, Leeds LS27 0PJ.

G2VF D.I.Y. LOOP ANTENNAS Long, Medium or Short Wave. SAE details. Rylands, 39 Parkside Avenue, Southampton SO1 9AF.

PAG TERMINAL UNIT KITS. PLL, AFSK, auto start/stop, £60.00 inc p&p. Creed Teleprinters 444 (TP15) overhauled, working. Raynel and BARTG members, £42.00 each. Details Mike Watson G8CPH, Ipswich (0473) 831448.

"RAYNET" YELLOW REFLECTIVE TABARDS with "RAYNET" Iron and rear similar to Police and Ambulance, etc. Also "RAYNET CONTROLLER", 2 sizes. Medium, £7.60; Large, £8.10 inc p&p. Details Mike Watson G8CPH, Ipswich (0473) 831448.

AMATEUR RADIO EQUIPMENT BOUGHT, sold and exchanged. Contact Dave G3RCO evenings 6-9pm on Hinchurch (040 24) 55733, Prestel Mbx 402455733 or SAE to 65 Cecil Avenue, Harnchurch, Essex RM11 2NA.

OSL CARDS from £10.00 per 1000. Logbooks £2.30. Samples 20p. Springwood Print, Springfield Avenue, Hanley, Huddersfield.

MRZ COMMUNICATIONS LTD—Sloke on Trent. We supply/repair business and amateur radio equipment. We offer incredible deals on Icom, Yaesu. We manufacture the MRZ 6 amp power supply—total protection for only £59.95. Telephone (0782) 619558 (24 Hrs).

AVO MODEL 8/Mk5. Sony 23 band CRF230 Receiver. Video generator, 50cps to 12MHz, New RS2000 Scanner £259.00. New linear 140W 26-30MHz £99.00. Teleprinters Type 33 plus additional free units. Marconi TF144H/4S generator. Only small selection. Part exchanges. Thousands manuals and crystals. SAE please, S.S.B. Products, G3EKK, 42 Halvarras Road, Playing Place, Truro, (0872) 862575.

NEW BANDS FT101ZD/FM, FC902. Selling as pair. New PA valves. Immaculate condition. £550.00, (0843) 292343.

RADIO MAST SECTIONS. British Telecom International have a limited number of scrap mast sections for sale that would be suitable for amateur radio aerials. There are two types available: Mast sections No 1 and No 2. No 1, 12' 6" long, triangular sides 15", weight approx 120lb, mild steel galvanised, £40.00/section. No 2, 15' long, triangular sides 2' 4", weight approx 500lb, mild steel galvanised, £30.00/section. Enquiries to J. A. Mirams, MR4.3.4, 43 Bartholomew Close, London EC1 7HP. 01-936 4702.

## MISCELLANEOUS

COURSE FOR CITY & GUILDS, Radio Amateurs Examination. Pass this important examination and obtain your licence, with an RRC Home Study Course. For details of this and other courses (GCE, Career and professional examinations, etc) write or phone—THE RAPID RESULTS COLLEGE, Dept JT10, Tullion House, London SW19 4DS. Tel: 01-947 7272 (9am-5pm) or use our 24hr Recordcall service 01-946 1102 quoting JT10.

HEATHKIT. UK spares and service centre. Cedar Electronics, Unit 12, Station Drive, Bredon, Tewkesbury, Glos, Telephone (0684) 73127.

DIGITAL ELECTRONICS. The professional correspondence course for both theory and practice. Send for brochure. Update, Waveney House, 150 Waveney Drive, Lowestoft NR33 0TR.

PATENTS TRADE MARKS and DESIGN—Booklets on request. Kings Patent Agency Ltd, Established 1866, (B.T. King MIMech, E.J.B. King, regd. Patent Agents)—146a Queen Victoria Street, London EC4V 5AT. Tel: 01-248 6161, Telex 883805.

## AMATEUR RADIO INSURANCE SCHEME

"ALL RISKS" INSURANCE for portable/mobile/base station amateur radio and ancillary equipment. A service for RSGB members only. Also public liability and equipment insurance for affiliated clubs and societies. Details and leaflets from Nick Gibson, Amateur Radio Insurance Services Ltd, 19 Quarry Street, Guildford, Surrey. Tel: 0483 33771.

## COMPUTER SOFTWARE/HARDWARE

AMPROM. THE ULTIMATE amateur radio communications ROM for the BBC Micro. SAE for details. CTP Software, 107A Shackleton Lane, London E8 2EB.

SPECTRUM "MASTERMORSE". Variable speed, spacing, pitch. Random letter groups, numbers, punctuation or any combination. Plain language with repeat. "Characteris learned only" and copy to printer features. Beginner to 25wpm. £4.95 or SAE details. G2DLS, 26 Links View, Wallasey, Merseyside.

"EINSTEIN" Morse reader, contest, locator, duplicate programs. Morse driven, £12.95. Own disk, £7.95. SAE details/orders. G4VPD, 37 Forest Way, B. Ingham B47 5JS.

AMSTRAD MORSE TUTOR. From the absolute beginner to beyond the Home Office Morse Test (6-25 wpm). Teaches and tests you in stages right through to simulated Morse receiving tests. Cassette £6 inc. Yeovil Electronic Developments, 44 St Marys Crescent, Yeovil, Somerset BA21 5RR.

ATTENTION BBC-B USERS! The advanced GW4WRD RTTY Program. Main features are: 40 column colour display, split screen, typeahead and text pages with editing, OSO review, printer log, call sign capture, variable speed, transceiver control ... and more. Tape £12, Disk £14.50 (specify 40 or 80 ltr) or SAE for details. Ham-Tel, "Rock Hill", Llanarthne, Carmarthen, Dyfed SA32 8LJ. (include call sign).

CBM64 PROGRAMS for band plan, resistor colour code and values. On tape £3.50, disk £4.50. G4PMJ, OTHR, (0482) 821061.

SSTV RECEIVE FOR DRAGON AND TANDY Color by G4BMK. Crisp pictures and line grey scale detail achieved by software only. Graphics pinler support. Tape £11.65 Cartridge upgrade (to 3 programs max.) £17.15. Also for Dragon, TRS80C: RTTY AMTOR and CW transceiver, Greyline and MUF/LUF predictor. For CBM64: RTTY, CW transceiver. RTTY for VIC20, ATOM. Grosvenor Software (G4BMK), 2 Beacon Close, Seaford, Sussex, (0323) 893378.

AECOMM NDW SELL. This popular program cheaper than anyone else! Castles unbeatable Morse Tutor for Amstrad 464/664/6128. Does everything. Satisfaction guaranteed! Simply send £6.50 (cassette) or £10.75 (disk) payable to "AECOMM" at 48 Shenley Lane, Birmingham, B29 6PN. SAE—details.

SPECTRUM (48K) PROGRAMS. UOSAT Data Demodulator ("Sudd"), no interference required, just direct audio connection from 2m receiver to Spectrum "ear" socket. Decodes 1200 baud data, including telemetry and news bulletins, from OSCAR-9 and OSCAR-11. Only £4.50. "Spot", comprehensive locallon program for IARU/ORA/NGR/IAL-long conversions, contest log scoring, etc, with hi-res map of Europe. £4.50. "Squill", equares Index file for VHF locator square collectors—many facilities including shading of squares on hi-res map. £4.50. Prices include cassette, full instructions, and postage (within UK and Eire). SAE details, N. P. Taylor (G4HLX), 87 Hunters Field, Stanford in the Vale, Faringdon, Oxon, SN7 8ND.

## HOLIDAY ACCOMMODATION

FLYING FROM GATWICK? Stay with G4MGU. Mill Lodge Guest House. 4 minutes from airport. Transport available. Telephone (0293) 771 170.

IN IBIZA your holiday flat. Comfortable, tranquil, reasonable prices in summer and winter. Information: DL7AEA, Tel. 003471 34 11 38, PO Box 73, San Antonio, Ibiza, Spain.

PEACE/QUIET SELF-CATERING chalets. (£15-£120). Central touring, omni for DXing. GOATS shack, "Chycoan", Tintagel, Cornwall PL34 0HH, (0840) 212262.

SOUTH DEVON HOLIDAY: Fairbourne House, Chudleigh, Newton Abbot, Devon, TO13 0DR. Tel: (0626) 853258. In own 10 acres near Dartmoor. Opportunities: painting, Yoga, etc. Well equipped radio shack (G4YXC), metal/woodworking facilities. Vegetarian wholefood. Non-smoking. SAE please: Mrs Sophie Edwards.

TOROUAY HOLIDAY FLATS. RadCom readers 15% discount until June 13th. 2/6 persons. 2M callnear available. 1/2 mile beaches/Cockington, Telephone (0803) 607333 brochure. G4NOA.

## INDEX TO ADVERTISERS

|                                 |                |                                |          |
|---------------------------------|----------------|--------------------------------|----------|
| AJH Electronics.....            | 300            | Jaycee Electronics.....        | 300      |
| Allwell Engineering.....        | 297            | J.E.P. Electronics.....        | 300      |
| Alyntronics.....                | 294            | Klingenstein Publications..... | 302      |
| Amateur Electronics Ltd.....    | 234/5          | KW Ten-Tec.....                | 296      |
| Amcomm /A.R.E.....              | Cover II & 239 | Lowe Electronics Ltd.....      | 226/9    |
| ARE Communications Ltd.....     | 236/7 & 296    | McKnight Crystal Co. Ltd.....  | 294      |
| B. Bamber Electronics.....      | 302            | McLallay Ltd.....              | 290      |
| Binary Star Technology.....     | 288            | Microwave Modules.....         | 238      |
| J. Birkell.....                 | 300            | Mutek Ltd.....                 | 302      |
| BNOS Electronics.....           | 292            | North London Comms.....        | 288      |
| Bredhurst Electronics.....      | 287            | Photo Acoustics.....           | 291      |
| Cambridge Kits.....             | 298            | QuartzLab Marketing Ltd.....   | 296      |
| CR Supply Co.....               | 302            | Radio Shack.....               | 297      |
| Dalring Electronics.....        | 295            | Random Electronics.....        | 296      |
| Dewsbury Electronics.....       | Cover III      | R.A.S. (Nottingham).....       | 294      |
| EMC Datacare.....               | 288            | South Midlands                 |          |
| Fairborough Communications..... | 288            | Communications Ltd.....        | 240/2    |
| Garex Electronics.....          | 299            | Sirumech Versalower Ltd.....   | 299      |
| G4TNY Electronics.....          | 300            | Stephens-James Ltd.....        | 301      |
| Hately Antenna Technology.....  | 298            | TAR Aerials.....               | 294      |
| Heatherlie Mics.....            | 287            | Technical Software.....        | 298      |
| C. M. Howes Communications..... | 293            | Thanel Electronics.....        | 230/3    |
| R. A. Kent Engineers.....       | 298            | Uppington Tele Radio Ltd.....  | 302      |
| ICS Electronics Ltd.....        | 295 & 301      | VHF Communications.....        | 290      |
| IQD Ltd.....                    | 290            | Reg Ward & Co. Ltd.....        | 290      |
|                                 |                | Ward Electronics.....          | 292      |
|                                 |                | Waters & Stanton.....          | 289      |
|                                 |                | C. Wilson.....                 | 287      |
|                                 |                | Yaesu Musen Co Ltd.....        | Cover IV |

# RSGB MAIL-ORDER PRICE LIST

|   | Non-members' price | Members' price |   | Non-members' price | Members' price |
|---|--------------------|----------------|---|--------------------|----------------|
| <b>RSGB books</b>   |                    |                | <b>Other publications</b>                                       |                    |                |
| <i>A Guide to Amateur Radio</i> (19th edn)                            | £3.88              | £3.30          | <i>All About Cubical Qued Antennas</i> (RPI)                    | £7.38              | £6.27          |
| <i>Amateur Radio Operating Manual</i> (13rd edn)                      | £6.52              | £5.54          | <i>Amateur Single Sideband</i> (Ham Radiol)                     | £5.78              | £4.91          |
| <i>Amateur Radio Software</i>   | £8.69              | £7.39          | <i>Amateur Television Handbook</i> (revised) (IBATC)            | £3.12              | £2.65          |
| <i>HF Antennas for All Locations</i>                                  | £7.79              | £6.62          | <i>*Antenna Anthology</i> (ARRL)                                | £6.36              | £5.41          |
| <i>How to Pass the Radio Amateurs' Examination</i>                    | £3.62              | £3.08          | <i>*ARRL Antenna Book</i> (ARRL)                                | £9.30              | £7.91          |
| <i>Microwave Newsletter Technical Collection</i>                      | £7.23              | £6.15          | <i>*ARRL Electronics Data Book</i> (ARRL)                       | £4.73              | £4.02          |
| <i>Morse Code for Radio Amateurs</i>                                  | £1.75              | £1.49          | <i>AX25 Amateur Pocket Radio Link-layer Protocol</i> (ARRL)     | £4.70              | £4.00          |
| <i>RSGB Amateur Radio Call Book</i> (1985 edn)                        | £7.33              | £6.23          | <i>Basic Radio Electronics</i> (Wiley)                          | £16.95             | £14.41         |
| <i>Radio Amateurs' Examination Manual</i> (11th edn)                  | £4.07              | £3.46          | <i>Beam Antenna Handbook</i> (RPI)                              | £7.24              | £6.15          |
| <i>Radio Communication Handbook</i> (15th edn) Vol 2                  | £8.96              | £7.62          | <i>Better Short Wave Reception</i> (RPI)                        | £7.24              | £6.15          |
| <i>Radio Communication Handbook</i> (15th edn) combined volume        | £14.10             | £11.99         | <i>Care and Feeding of Power Grid Tubes</i> (Varian)            | £10.75             | £9.14          |
| <i>Radio Data Reference Book</i> (15th edn)                           | £9.13              | £7.76          | <i>CMOS Cookbook</i> (Sams)                                     | £13.84             | £11.76         |
| <i>Raynet Manual</i> (1984 edn)                                       | £2.95              | £2.51          | <i>Complete DX'er</i> (W9KNI)                                   | £8.23              | £7.00          |
| <i>Teletype Handbook</i> (2nd edn)                                    | £7.67              | £6.52          | <i>Complete Shortwave Listener's Handbook</i> (Tabl)            | £12.93             | £10.99         |
| <i>Television Interference Manual</i> (2nd edn)                       | £2.45              | £2.08          | <i>Design of VMOs Circuits with experiments</i> (Sams)          | £9.00              | £7.65          |
| <i>Test Equipment for the Radio Amateur</i>                           | £6.65              | £5.65          | <i>DX Edge Propagation Aid</i>                                  | £14.92             | £12.68         |
| <i>VHF/UHF Manual</i> (14th edn)                                      | £11.20             | £9.52          | <i>FM and Repeaters for the Radio Amateur</i> (ARRL)            | £4.56              | £3.88          |
| <i>World at Their Fingertips</i> (paperback)                          | £8.21              | £6.98          | <i>Fourth ARRL Amateur Radio Computer Networking Conference</i> | £10.66             | £9.06          |
| <b>RSGB logbooks</b>  |                    |                | <i>G-QRP Club Circuit Book</i>                                  | £4.79              | £4.07          |
| <i>Amateur Radio Logbook</i>  | £2.93              | £2.49          | <i>Guide to Oscar Operation</i> (AMSAT)                         | £1.89              | £1.61          |
| <i>Mobile Logbook</i>   | £1.30              | £1.11          | <i>Hints and Kinks for the Radio Amateur</i> (ARRL)             | £5.53              | £4.70          |
| <i>Receiving Station Logbook</i>                                      | £3.04              | £2.58          | <i>*How to Troubleshoot and Repair AR Equipment</i>             | £11.09             | £9.43          |
| <b>RSGB maps, charts and lists</b>                                    |                    |                | <i>*Power Supply Handbook</i> (Tabl)                            | £11.64             | £9.89          |
| <i>HF Awards List and Countries List</i>                              | 51p                | 43p            | <i>Radio Amateurs Antenna Handbook</i> (RPI)                    | £8.34              | £7.09          |
| <i>Great Circle DX Map</i> (wall)                                     | £2.57              | £2.18          | <i>Radio Amateurs Callbook</i> (1986) (DX listings) (ARCI)      | £19.43             | £16.52         |
| <i>IARU Region 1 Beacon List</i>                                      | 42p                | 36p            | <i>Radio Amateur Callbook</i> (1986 USA listings) (ARCI)        | £19.98             | £16.98         |
| <i>Locator Map of Europe</i> (wall)                                   | £2.07              | £1.76          | <i>Radio Amateurs Handbook</i> (1985) (Softback) (ARRL)         | £18.12             | £15.40         |
| <i>Locator Map of Europe</i> (card for desk)                          | 75p                | 64p            | <i>*Radio Communication Receivers</i>                           | £16.63             | £14.14         |
| <i>UK Beacon List</i>   | 42p                | 36p            | <i>Radio Frequency Interference</i> (ARRL)                      | £4.43              | £3.77          |
| <i>UK Repeater List and maps</i>                                      | 53p                | 45p            | <i>RTTY the Easy Way</i>  | £4.12              | £3.50          |
| <i>Western Europe (new) Locator Map</i> (wall)                        | £3.24              | £2.75          | <i>Satellite Experimenters Handbook</i> (ARRL)                  | £12.62             | £10.73         |
| <i>World Prefix Map</i> (in full colour wall)                         | £2.68              | £2.28          | <i>Secrets of Ham Radio DXing</i>                               | £8.39              | £7.13          |
| <i>Meteor Scatter Data</i>  | £3.72              | £3.16          | <i>Semiconductor Data Book</i> (Newnes)                         | £8.44              | £7.17          |
| <b>RSGB members' sundries (members only)</b>                          |                    |                | <i>Shortwave Listeners' Antenna Handbook</i>                    | £16.73             | £14.22         |
| <i>Radio Communication Easibinder</i>                                 | —                  | £6.72          | <i>*Shortwave Propagation Handbook</i> (Cowan)                  | £8.25              | £7.01          |
| <i>RSGB badge car sticker</i>   | —                  | 49p            | <i>Simple Low-cost Wire Antennas</i> (RPI)                      | £7.23              | £6.15          |
| <i>RSGB belt (real leather)</i>                                       | —                  | £7.57          | <i>Solid State Design for the Radio Amateur</i> (ARRL)          | £8.33              | £7.08          |
| <i>RSGB tie (coffee, maroon, green or blue)</i>                       | —                  | £3.20          | <i>Towards the Radio Amateurs' Examination</i>                  | £4.57              | £3.88          |
| <i>RSGB callsign cap</i>  | —                  | £4.98          | <i>Towers International Transistor Selector</i>                 | £14.77             | £12.55         |
| <i>RSGB logo rubber stamp</i>   | —                  | £3.16          | <i>*Towers Op-Amp Selector</i>                                  | £10.06             | £8.56          |
| <i>RSGB station callsign plaque</i> (Delivery five weeks)             | —                  | £9.50          | <i>TV for Amateurs</i>  | £2.36              | £2.01          |
| <i>RSGB t-shirts</i> (med, large, xll)                                | —                  | £4.90          | <i>UHF Compendium Parts 1 and 2</i>                             | £15.81             | £13.44         |
| <i>Standard callsign lapel badge</i> (Delivery five weeks)            | —                  | £1.96          | <i>Understanding Amateur Radio</i> (ARRL)                       | £5.77              | £4.90          |
| <i>De-luxe callsign lapel badge</i> (Delivery five weeks)             | —                  | £2.81          | <i>*Weekend Projects for the Radio Amateur</i> (ARRL)           | £3.47              | £2.95          |
| <i>Lapel badge</i> (RSGB emblem, pin fitting)                         | —                  | 60p            | <i>World Atlas</i> (RACI)                                       | £3.12              | £2.65          |
| <i>Mini lapel badge</i> (RSGB emblem, pin fitting)                    | —                  | 68p            | <i>World Radio TV Handbook 1985</i>                             | £10.50             | £8.93          |
| <i>Members' headed notepaper</i> (50 sheets) quarto                   | —                  | £1.20          | <i>World Radio TV Handbook 1986</i>                             | £25.75             | £21.89         |
| <i>Members' headed notepaper</i> (50 sheets) octavo                   | —                  | 76p            | <i>99 Test Equipment Projects You Can Build</i>                 | £10.75             | £9.14          |
| <b>Miscellaneous</b>  |                    |                | <b>RSGB kits</b>  |                    |                |
| <i>"Amateur radio" (two colours) car sticker</i>                      | 78p                | 66p            | <i>Morseman</i> (Rad Com December 1984)                         |                    |                |
| <i>"I'm on the air with amateur radio" (four colours) car sticker</i> | 89p                | 76p            | <i>Kit 1</i>  | £13.52             | £11.49         |
| <i>"I'm monitoring '5 are you?" (two colours) car sticker</i>         | 78p                | 66p            | <i>Kit 2</i>  | £20.67             | £17.57         |
| <i>Radio Communication back issues</i> (As available)                 | £1.40              | £1.19          | <i>Kit 3</i>  | £38.24             | £32.50         |
| <i>Radio Communication bound volume, 1982</i>                         | £16.87             | £14.34         | <i>CMOS 280 ic</i>  | £8.65              | £7.35          |
| <i>Radio Communication bound volume, 1983</i>                         | £17.90             | £15.22         | <i>Ferrite ring 28-041-31</i> (Pack of two)                     | £2.71              | £2.30          |
| <i>Radio Communication bound volume, 1984</i>                         | £17.90             | £15.22         | <b>MORSE INSTRUCTION AID</b>                                    |                    |                |
| <i>RSGB coffee mug</i> (plastic)                                      | £2.16              | £1.84          | <i>RSGB morse course Stage 1 to 5wpm</i>                        | £4.80              | £4.08          |
| <i>RSGB hf contest log sheets</i> (100)                               | £3.69              | £3.14          | <b>MAGAZINE SUBSCRIPTIONS</b>                                   |                    |                |
| <i>RSGB vhf contest log sheets</i> (100)                              | £3.69              | £3.14          | <i>QST</i> (including ARRL membership) One year                 | £33.39             | £28.38         |
| <i>Smith charts, pad of 25</i> (Chartwell D7510)                      | £2.35              | £2.00          | Two years   | £63.53             | £54.00         |
|   |                    |                | Three years   | £95.02             | £80.77         |
|   |                    |                | By air via KLM to W Europe only one year                        | £47.45             | £40.33         |
|   |                    |                | <i>Ham Radio Magazine</i> (per annum) (incl air delivery)       | £27.99             | £23.79         |

## ORDERING INFORMATION

**NON-MEMBERS.** Use left-hand price columns. Note that members' sundries are only available to members of RSGB.

**MEMBERS.** Use right-hand price columns. It is essential that you quote your call sign or BRS number so that you can be recognised as a member.

**PRICES.** These include postage, packing and VAT where applicable. For airmail despatch, please ask for price before ordering. Goods are obtainable, less p & p, at RSGB headquarters between 10am and 4pm, Monday to Friday.

**POSTAL TERMS.** Cash with order. Stamps and book tokens cannot be accepted. Cheques and postal orders should be crossed and made payable to "Radio Society of Great Britain". Our Giro account number is 5335256. Please write your name and address clearly on the order, and allow up to 28 days for delivery.

ORDER FROM: RSGB Publications (Sales), Lombdo House, Cronborne Road, Potters Bor, Herts EN6 3JW

(Raynet supplies should be obtained from Mrs J. Balestrini, Merrivale, Willow Walk, Culverstone, Gravesend, Kent)

## NEWSLETTER SUBSCRIPTIONS

*Microwave Newsletter, VHF Newsletter, DX Newsletter.* For details contact the membership services department at RSGB headquarters.

\*Items marked with an asterisk may not be available immediately; please telephone before ordering to confirm availability.



**Peter Hart, G3SJX takes a close look  
at one of the transverters for the new 50 MHz band  
available from the muTek range.**

**50  
MHz**

## **EQUIPMENT REVIEW**

The muTek TVVF50c

## INTRODUCTION

Becoming operational on a new VHF band may be achieved in two different ways. A dedicated transceiver may be purchased for that band or a transverter added from an existing band. The latter approach requires considerably less financial outlay if an existing transceiver is already available. MuTek Ltd include two 50 MHz transverters within their product range, the TVVF50c for use with 144 MHz transceivers, and the TVVF50a for use with 28 MHz transceivers. The TVVF50c is the subject of this review.

The most suitable bands from which to transvert to 50 MHz are 28 MHz and 144 MHz. Use of 144 MHz has the advantage that the conversion is potentially free of in-band spurious signals up to high orders. With 28 MHz, there are two backward tuning 7th-order products. On the other hand, 28 MHz receivers generally have a higher dynamic range and improved reciprocal mixing performance. Direct signal breakthrough on 144 MHz can also be a problem when large signals are around on that band. However, the decision on which band to use is more likely to be determined by the availability of an existing transceiver than for any technical reason.

To achieve optimum receive performance on 50 MHz, the noise figure, gain and dynamic range of the transverter should be carefully considered with regard to the noise figure and dynamic range of the transceiver, in much the same way as adding a preamplifier. The factors to be considered are fully described in References (1) and (2). In general, the following assumptions are true:

(i) The overall dynamic range can never be better than that of the worst part of the system (transceiver or transverter).


(ii) The optimum balance between overall noise figure and dynamic range is achieved when the conversion gain of the transverter is approximately 2-3 dB more than the difference between the transceiver and transverter noise figures (transceiver noise figure assumed to be the worse). In this case the overall noise figure is about 2 dB greater than the transverter noise figure alone. Higher conversion gains will result in a diminishing improvement in overall noise figure but every dB of additional gain is a dB reduction in strong signal performance. Lower conversion gains will degrade the overall noise figure. A 4-5 dB system noise figure including feeder loss is generally adequate for 50 MHz operation.

(iii) If the output intercept of the transverter is substantially greater than the input intercept of the transceiver, the strong signal performance is limited by the transceiver. If it is substantially less, the strong signal performance is limited by the transverter.

## DESCRIPTION

The TVVF50c covers 50-52 MHz when used with 144-146 MHz transceivers and operates from a 13.8 volt supply. An alternative version (not reviewed), the TVVF50a, is available for use with 28-30 MHz transceivers. 1 to 10 watts RF drive is required at 144 MHz settable by an internal preset control and an ALC loop is used to prevent overdrive. Both external switched and RF-sensed transmit/receive switching is incorporated. The transverter circuitry is constructed on a single through-hole

plated PCB and housed in a low height wrap-around case measuring 31cm (w) by 17cm (d) by 3.5cm (h). The front panel contains an on-off switch and a five segment bar-graph display indicating drive level. The rear panel contains connectors for RF input and output and power/control. No provision is made for separating the receive and transmit RF paths. Control lines are provided for transmit/receive switching, linear switching and power-on sensing. Note that pins 2 and 4 were shown transposed on fig 3 in the handbook provided.

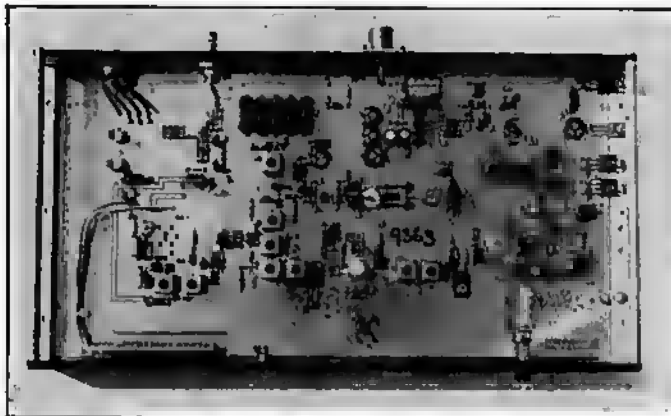

The innards of the muTek TVVF50c 144-50 MHz transverter. The PA transistors are bolted to the square section bar on the right.

The circuitry comprises a common ring mixer for transmit and receive using four discrete diodes and a diplexer IF filter for minimum intermodulation. The 94 MHz oscillator and buffer use J310 FETs. A future option will allow a second crystal (92 MHz) to be selected to cover the band 52-54 MHz. The PCB already includes the tracks. The receive RF amplifier uses balanced BF981 MOSFETs and the IF amplifier a J310 JFET. This is followed by a PIN diode T/R switch and a 6 dB power attenuator in the 144 MHz input/output common to both receive and transmit. The PIN diode switch forms an ALC-controlled attenuator when on transmit. Four stages of final frequency amplification generate the transmitter power using plastic TO220 power transistors. Rather minimal heatsinking is provided for these devices. Forward/reflected power sensing on the output is used to provide ALC and power reduction with high load VSWR.

An 8-page handbook is provided which describes the setting up and use of the equipment. The basic design philosophy and circuit is described with the aid of a block diagram but full circuits are not included.

## MEASUREMENTS

Laboratory measurements made on the transverter are summarised in Table 1. These measurements were made before the announcement of the 50 MHz allocation in the UK and hence were not restricted just to the band 50-50.5 MHz. Additional comments are as follows:

Frequency error.

A trimmer is provided to set the crystal frequency.

Conversion gain.

The conversion gain is about optimum for most VHF transceivers.

## Receiver spurious responses.

The IF breakthrough figure (measured with respect to an on-tune signal) may be insufficient when strong signals are around on the IF. This figure varied with pressure on top of the case and could be improved by 10 dB by grounding the PCB earth plane to the back panel between the RF input and output sockets. A further 10 dB of improvement could be achieved by placing an earthed screen across the PCB between these two sockets. According to muTek Ltd, design changes have now been incorporated in current production models to reduce this level of IF breakthrough. A well screened lead connecting the transverter to the transceiver is essential to prevent direct IF pick-up. A double braided coaxial cable such as RG223/U is particularly recommended.

The transverter exhibited very few other spurious responses (43 MHz at -70 dB, 4 at vhf/uhf at -80 dB).

## Intermodulation.

3rd order intercept point measurements were made with input signals at 50.4 and 50.6 MHz. Some variation across the band would be expected due to the change in conversion gain. The figure given in the table corresponds to a two-tone spurious free dynamic range in SSB bandwidths (2.5 kHz) of 93 dB. The limitation on dynamic range will be the 144 MHz receiver in virtually all cases.

## Output power and spuri.

Although the transverter is specified as delivering 10 W PEP output, this was not achieved at a reasonable level of distortion. 10 W output could be achieved but 3rd order distortion products were less than -20 dB (measured with respect to either tone of a two-tone test

signal). Higher order products reduced at a rate of about 5 dB/order. The transmitter failed with short circuit supply after 5 minutes operation at 8 W CW output. Fearing the worst, the fault was eventually traced to a misfitting mica washer under the driver transistor. This fault was simply rectified.

As the second harmonic of 50 MHz falls within FM broadcast band II, it is essential that harmonic outputs are kept to a very low level. The level measured may be insufficient in some circumstances, in which case, an additional antenna filter will be required. MuTek claims that the harmonic rejection measured for the review transverter was some 10 dB worse than normally measured on a typical TVVF50c.

## Supply voltage variation.

The transverter continued to function satisfactorily on receive down to 9 V or below. On transmit, the power was down to about half at 10 V supply.

## PERFORMANCE ON THE AIR

Up until 1 February air tests were limited to receive only. The latest stage in the 50 MHz experiment - the general release of the band on a 24h basis to Class A licensees - was eagerly awaited and many contacts were made. The transverter was used in conjunction with an FT225RD (which also included a muTek front end) and a Tonna 5-element Yagi. No problems were experienced and a healthy increase in noise was obtained when the antenna was connected to the input compared with a 50 ohm load. The strong signal performance appeared excellent with no problems from a strong local station. No spuri were observed at any time. The transmit to receive delay introduced by the RF sensing circuitry can be annoying with push-to-talk operation. The delay can be disabled by cutting a link as described in the manual.

| RECEIVE   |             |                            |
|---|-------------|----------------------------|
| Current consumption                                       |             | 180mA                      |
| Frequency error   |             | 550Hz                      |
| Conversion gain:  | (i) 50MHz   | 8.2dB                      |
|   | (ii) 51MHz  | 7.5dB                      |
|   | (iii) 52MHz | 6.5dB                      |
| Noise figure  |             | <2.5dB                     |
| -3dB bandwidth  |             | 48.4-53.7MHz               |
| -30dB bandwidth   |             | 45.5-57.8MHz               |
| LO feedthrough to 50MHz                                   |             | -65dBm                     |
| LO feedthrough to 1F                                      |             | -60dBm                     |
| Image response  |             | -80dB (238MHz)             |
| 3rd order input intercept                                 |             | +1.5dBm                    |
| 3rd order output intercept                                |             | +9.5dBm                    |
| TRANSMIT  |             |                            |
| Current consumption @ 8W output                           |             | 2.4A                       |
| Minimum input power for RF sense operation                |             | 100mW                      |
| Drive power range for 8W output                           |             | 1.4 - 20W                  |
| Output power for -26dB two tone intermodulation products: | (i) 50MHz   | 8.5W pep                   |
|   | (ii) 51MHz  | 7.5W pep                   |
|   | (iii) 52MHz | 6.0W pep                   |
| Harmonic outputs  |             | -55dB(2nd) ] -65dB(higher) |
| Spurious outputs  |             | ] -65dB                    |
| Gain variation across band                                |             | 1.5dB                      |

Table 1. Performance Measurements for muTek TVVF50c



## CONCLUSIONS

The muTek TVVF50c transverter is a well conceived design which achieves the optimum balance between noise figure and dynamic range. When used with a top grade multimode transceiver, state-of-the-art performance on 50 MHz can be achieved. On transmit, the transverter is a little short of output power particularly at reasonable distortion levels.

The muTek TVVF50c currently costs £199.90 and the TVVF50a £239.90. All prices include VAT at 15%.

## ACKNOWLEDGMENTS

The transverter reviewed in this article was kindly loaned by muTek Ltd of Holsworthy, Devon.

## REFERENCES

>1½ "The effects of preamplifiers on receiver performance, and a review of some currently available 144MHz preamplifiers (part 1)", J N Gannaway, G3YGF. Rad Com November 1981, pp 1026-31.

>2½ "Modern vhf/uhf front-end design", I White, G3SEK. Rad Com April - July 1985 (in 4 parts).

### Comment from muTek Ltd

We have read Peter Hart's review of our TVVF50c transverter with considerable interest. Although generally in agreement with his comments there are two points upon which we would like to enlarge.

We are concerned that the transmitter linearity (or rather the lack of it) measured on the review sample gave rise to comment. Our test procedures, applied to every 50 MHz transverter leaving the factory, allow the third-order intermodulation products generated in a two-tone test to reach -33 dB with reference to the PEP output level reached (about 12W) when the unit is driven into ALC before rejection. Usually we measure rather better than this, as confirmed by reviews in other publications.

We chose to use a broadband amplifier driving a low-pass filter rather than the more usual tuned amplifier precisely because it is very difficult indeed to obtain adequate linearity from a tuned amplifier over the bandwidth involved. That the linearity varied substantially across the band, together with the very high second harmonic level, suggests that the low-pass filter was either faulty or had somehow become misaligned.

Regarding Peter's comment on heatsinking, the enclosure used for the transverter will quite happily dissipate the 15W or so involved within the ambient temperature ranges to be expected. The package was specifically designed for this application and has been used for similar products over the last two years with no failures directly attributable to thermal problems.

MuTek Ltd keeps the designs of its products under review and is responsive to constructive criticism. The sample of the TVVF50c reviewed by G3SJK was manufactured in July 1985; since then we have made changes both to the design of the transverter (some of which were suggested by this review) and also to our alignment procedures.


## Easy-to-build 50 MHz stripline filter

We mentioned in last month's Bulletin that a low level of second harmonic is particularly important in a 50 MHz transmitter, basically because the second harmonic falls in Band II. Frequencies in this band around 100 MHz are used both for broadcasting and for emergency services and it's obviously vital not to cause interference. So this month we present an easy-to-build design for a 50 MHz stripline filter; the design originally appeared in the ARRL Handbook and we are grateful to the American Radio Relay League for their permission to reproduce it here. The filter consists of a folded inductor brought to series resonance by a variable capacitor at one end. Input and output coupling is by means of loops. Its insertion loss at 50 MHz is around 1 dB.

The filter is made in a standard 17" by 6" by 3" chassis, which could be bent up from 16 or 18 SWG aluminium alloy or formed from sheet and angle stock. A bottom cover plate is required, attached with self-tapping screws or via hank bushes. A partition along the centre of the assembly, as shown in the photograph, is 14" long and 3" wide and can be mounted with angle stock or bent up from sheet with extra folds to suit. The inductor is 32" long and 13/16" wide, folded approximately in the centre round a mandrel of 2 3/4" diameter - a bottle containing Roses' Lime Juice was used for the filter made for GB3RS but other household bottles or cans may well be the right size. Brass or copper strip could be used for the inductor if a suitable piece is to hand.

These four items are the heart of the filter, and the Society has arranged for them to be available as a kit from Messrs H L Smith & Co of 287-289 Edgware Road, London W2 1BE. The cost over-the-counter is £6.12 and by post £7.47.

The tuning capacitor is a wide-spaced 30 pF variable; a Jackson C804 type was used in the GB3RS version, obtainable from various sources including Maplin, STC, Electrovalue, etc. Remember that the voltage across the capacitor in a series-tuned circuit is high, so don't use a variable whose plates are too close together.

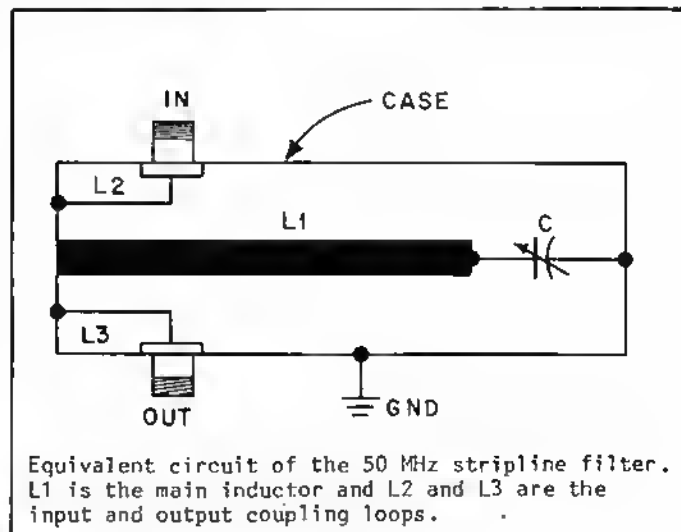

Equivalent circuit of the 50 MHz stripline filter. L1 is the main inductor and L2 and L3 are the input and output coupling loops.

Input and output coupling loops are 10" long and run between SO239 sockets and the chassis as shown in the photograph, spaced about 1/4" away from the main inductor. They can be made of 12 or 14 SWG wire.

The inductor is supported in the chassis by four radially disposed spacers (see photograph) which in an ideal world would be 1 1/2" long and ceramic. Since ceramic spacers of any length seem to be getting more and more difficult to find, it may be necessary to improvise with shorter spacers shimmed with washers or to make them from Tufnol, fibreglass or PTFE if available. Do not use Perspex or nylon spacers since these are lossy at VHF and will get warm - probably to the point of distortion.

Construction is simple. Firstly, and BEFORE bending the radius in the approximate centre of the main inductor, work out how the tuning capacitor will be connected to one end of the line; it will probably be necessary to use solder tags unless the inductor is made from brass or copper and consequently can be soldered directly to the capacitor's stator supports. Having decided on a suitable method, establish the point along the line about which the radius will be bent - bearing in mind that although one end of the line will be attached direct to the end wall of the chassis, the other end will be a couple of inches away because of the variable. If using a Jackson C804 the bend should be made about a point 18" from the end of the line connected directly to the chassis; this brings the variable nicely opposite the chassis end of the line. Larger capacitors will obviously require an extra half inch or so on this dimension. Make the bend, then drill holes for the spacers and bolt them to the line. Then attach the tuning capacitor. Offer up the assembly to the chassis and establish the position of the mounting hole for the shaft of the variable capacitor, the other ends of the spacers and the holes for attachment of the other end of the inductor to chassis; these can then be drilled and the inductor-capacitor assembly finally mounted in the chassis.

The next stage is to mount the centre partition, which is simply a matter of marking-out, drilling and assembly. Take care to mount it in the centre of the U formed by the folded inductor. Finally, the input and output coupling loops should be fitted; probably the best way to establish the position of the hole for the SO239 sockets is to attach the 10" of wire to the centre conductor of the socket and then make a right-angle bend in the wire at a distance from the socket corresponding to the distance of the centreline of the main inductor from the top of the chassis. Then connect a solder tag to the other end of the loop and offer up the entire assembly to the chassis; mark out the position at which the socket ends up and also the position of the solder tag, bearing in mind that the loop wants to be about 1/4" away from the line. Repeat the process for the other loop, then drill holes and assemble. Construction is now complete.

Alignment is simply a matter of adjusting the variable capacitor (and possibly the spacing between the input and output coupling loops and the line) for lowest reflected power on an ordinary SWR bridge - ours tuned up nicely without altering the loop spacing. Then you can go on 50 MHz, secure in the knowledge that your harmonics are a lot further down than they were....?


#### ADDRESSES

H L Smith & Co, 287-289 Edgware Road, London W2 1BE.

Maplin Electronic Supplies, PO Box 3, Rayleigh,  
Essex, SS6 8LR. Tel: 0702 554155.

STC, Edinburgh Way, Harlow, Essex. Tel: 0279 26777.

Electrovalue, 26 St. Judes Road, Englefield Green,  
Edgham, Surrey, TW20 0HB. Tel: 0784 33603.

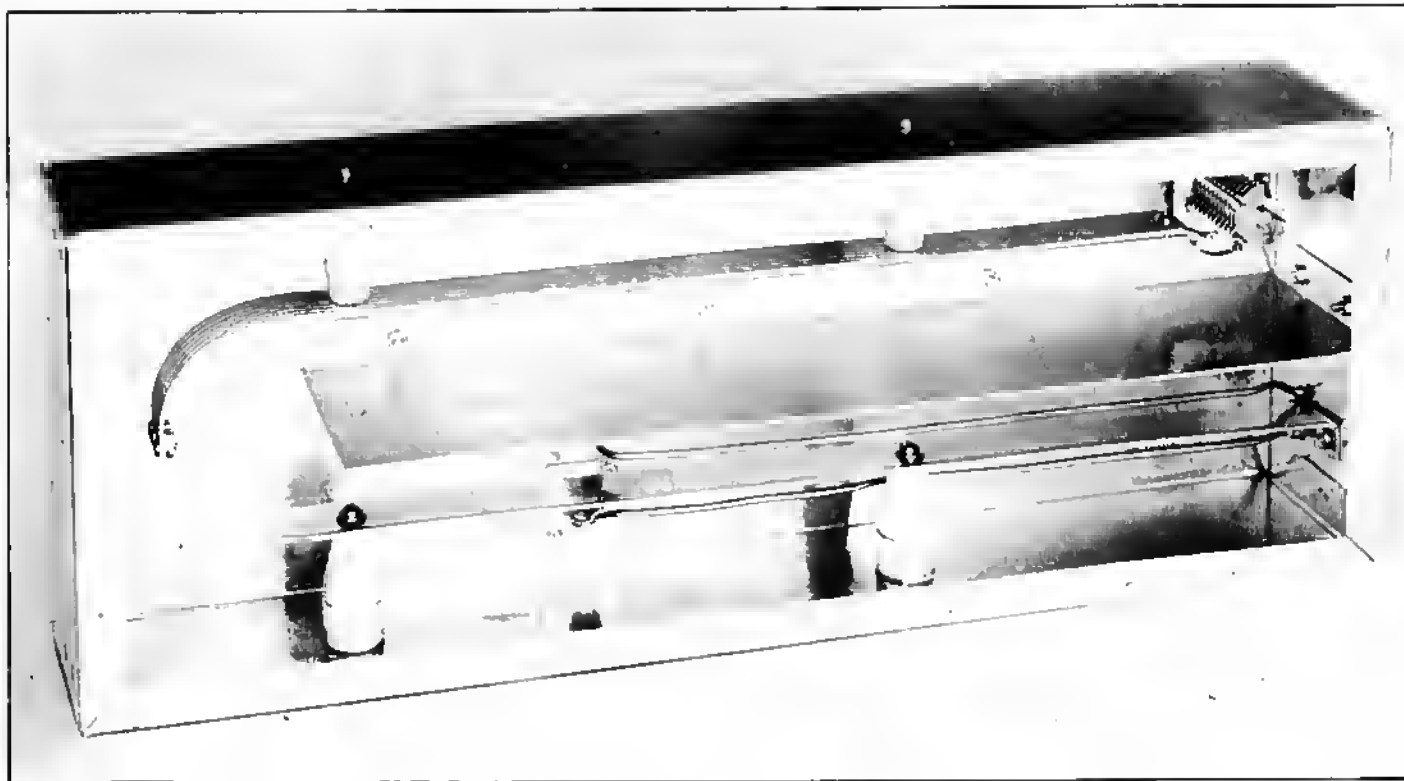

# RSGB News Bulletin

PAGES

## SOCIETY UNCOVERS NEW RIS STRATEGY

**It took effect from January...**

For many years some of the most important issues in amateur radio have been associated with breakthrough of amateur transmissions into various forms of domestic electronic entertainment equipment. Known over the years as TVI, BCI, RFI and latterly EMC (standing for Electromagnetic Compatibility), the phenomenon of "breakthrough" has traditionally been a source of friction and dispute between transmitting amateur and uncooperative TV-watching or radio-listening neighbour. Often there has been a mediator involved, the Radio Interference (or Investigation) Service; usually called in by the neighbour at the behest of the amateur, the RIS officer has been both a problem-solver and a valuable intermediary with the ability to defuse an often difficult situation by skilful and impartial diplomacy.

**Not all the  
conclusions  
were made  
publicly  
available...**

Until 1984 the RIS was operated by British Telecom (formerly the Post Office and prior to that the GPO) on behalf of the Home Office on an agency basis; with the passing of the 1984 Telecommunications Act, which privatised British Telecom, control of the RIS was transferred to the Department of Trade and Industry. A review of the structure and functions of the RIS was promised soon after the transfer, and duly took place in

late 1984. Not all the conclusions of the review were made publicly available; the September 1985 edition of the RSGB Bulletin (page 1) gave all the published information. The essence of the review was that the RIS would be re-orientated towards the enforcement role and would carry out what Mr Geoffrey Pattie, Minister of State for Industry & Information Technology called

**"... a phased  
withdrawal from  
... domestic TV &  
radio reception  
problems**

"....a phased withdrawal from the time-consuming effort put into dealing with domestic TV and radio reception problems". The DTI subsequently published a booklet (obtainable from any Post Office) which was intended to assist ordinary members of the public in identifying such problems and finding suitable solutions: the RIS would not now attend a complainant unless a call-out charge of £21 was paid and some other conditions were fulfilled.

The Editorial in the same edition of Radio Communication set out the Society's initial reactions. At that time the Society itself was involved in two cases of breakthrough which, although technically no different from many other similar cases, had attracted the attention of Members of Parliament and thereby the Minister of State. This obviously made them more delicate and difficult to handle, since solutions which may

be politically expedient are not always intellectually rational or morally equitable. It was in the course of these cases that the Society became aware of the DTI's increasing interest in immunity standards for domestic entertainment equipment. In September 1985 it had been announced that the provisions of BS 905 were to be incorporated in legally binding regulations "...as soon as possible". However, it now appears that a CENELEC standard will be adopted by the EEC and will therefore override BS 905; it is likely to be introduced into the UK in a year or two. Amongst other things this will require certain categories of mains-powered TV and radio receivers to continue to function correctly in the presence of an RF field strength of about 1.8 volts per metre.

In January 1986 the Radio Investigation Service began operating to a new strategy, which had been largely devised as a response to the cases mentioned earlier, and also to the prevailing restrictions on its budget in the contemporary political climate. This strategy was contained in a document which was said later by the DTI to have been a "...draft for discussion", although neither the Society nor any other outside body was invited to take part in its production. Even though nominally a draft, a copy of the document was sent to all RIS District Managers; since the word "draft" did not appear anywhere on it or in it, the implication was that it was a strategy to be introduced with immediate effect.

**... said later by  
the DTI to have  
been a "draft  
for discussion"**

It contained a draft letter to be sent to a radio amateur implicated in breakthrough problems, which is discussed in more detail in this month's Editorial; its import was that it was up to the amateur to negotiate with his neighbour, fit filters and generally solve the problem.

## The Society's views were made clear to the DTI.

It is perhaps unnecessary to say that the Society had most severe reservations about both the quality and the scope of the strategy. An urgent meeting with the DTI was requested, prior to which the strategy document was analysed in depth by Society staff and volunteers. Legal advice was also taken. The Society's views were made clear to the DTI at a meeting which took place on 20 February, and as we went to press the situation was that the Society was considering its position and its next course of action. It is

necessary for the RSGB to consider several interrelated factors; one is the legal basis for the DTI's actions with regard to licence variation, especially having regard to the reasonable expectation of the radio amateur that he can continue to exercise the privileges of his licence. The CENELEC proposals also require careful consideration, particularly with regard to possible input to the BSI Committee which represents the UK in these matters.

To use a fashionable expression, the "bottom line" of all this is that unless the RSGB takes vigorous action - possibly even involving the courts - it is likely that individual radio amateurs in the UK could suffer quite severe restrictions on their operation because of the highly inequitable imbalance of apparent statutory support between a complaining

neighbour and a radio amateur. It also seems abundantly clear that high-level decision-making in the Department of Trade and Industry is being carried out on the basis of poor technical and legal advice. It is imperative that this state of affairs is drastically changed. In fact, the Society views the entire complex and politically sensitive situation as a grave potential threat to the well-being of amateur radio in the UK.

Just to reiterate what was said in the Editorial, any member who is currently in a situation involving breakthrough and who has received correspondence from the Radio Investigation Service - or any other part of the DTI for that matter - is asked to send copies of such correspondence IMMEDIATELY to The Secretary (RIS) at RSGB Headquarters.



## Pirates: Latest convictions

Two South London pirates were convicted recently under the Wireless Telegraphy Act 1949. Kevin Baker, of 35 Cranmer Road, Forest Gate, London E7, appeared at Newham Magistrates' Court on 17 January and was found guilty on a charge of installation and use of amateur radio equipment without a licence. Baker was given a conditional discharge for 12 months and ordered to pay costs of £115. The Court ordered that all the equipment involved, worth more than £550, was to be forfeited.

Raymond Bittner, of 105 Elderton House, Loughborough Park, Brixton, London SW2, pleaded guilty at Camberwell Magistrates' Court on 21 January to three charges under the Wireless Telegraphy Act 1949. For the first two charges, of operating a 144 MHz amateur transceiver from his home on 23 and 24 October 1985, Bittner received a fine of £24 and 12 months' conditional discharge respectively. The third charge, under Section 13 of the Act, of deliberately causing interference to the South London repeater GB3SL, is an indictable offence and can be tried in a higher court. For this offence Bittner was fined £25. He was also ordered to pay the DTI's costs of £120 and the equipment involved was ordered to be forfeited. The Court showed considerable leniency to Bittner because of his reduced circumstances.

It is understood that further prosecutions along similar lines are imminent.

We're still not sure about the current status of the French national society, REF, but we recently received a press release from them giving a new address for their QSL Bureau! For anyone who might be interested, it is:- REF QSL

BP 273  
81209 MAZAMET Cedex  
France

## RSGB ON THE ROAD

The rally season has started in earnest, and the Society will be at the following events this year.

18th May  
Northern Mobile Rally,  
Gt Yorkshire Showground,  
--

15th June  
RNARS Mobile Rally,  
HMS Mercury.  
--

22nd June  
Denby Dale Mobile Rally.  
--

3rd August  
RSGB Mobile Rally,  
Woburn Park,  
--

17th August  
Red Rose Rally,  
Haydock Park Racecourse  
--

24th August  
Preston Rally,  
Lancaster University  
--

7th September  
Lincoln Hamfest '86,  
Lincolnshire Showground  
--

We may be at one or two others which had not been planned as we went to press.

One reminder - we can only sell books at members' prices to members! We obviously need to know whether or not you're a member, so you must BRING YOUR MEMBERSHIP CARD if you want to buy books from an RSGB bookstall and receive the members' discount. If you forget your membership card, please don't kick the bookstall staff when they refuse to give you the discount....

## News about new books

By the time you read this the new 1986 RSGB Callbook and Members' Handbook should be available. This has 292 pages, 40 more than last year, and it costs substantially less than the 1985 edition - it's £4.89 to members by post. If you purchase over-the-counter at Headquarters, you only need to part with a mere £3.83! Incidentally, the Callbook will now be updated twice yearly - there'll be another edition in the autumn.

We've now got the softback version of the ARRL Handbook 1986 in stock - it costs £16.79 to members by post. By the time you read this the new ARRL Antenna Compendium should also be available: this contains a large selection of antenna-related material previously published in QST. As yet we don't have a price for this excellent book, so please phone Headquarters for details.

Now that spring has arrived, why not add an RSGB tee-shirt to your wardrobe? These extremely natty numbers in grey cotton have the RSGB logo in black and come in three sizes - medium, large and extra-large. They cost £4.90 to members by post, and don't forget to tell us what size you are when ordering.

Also don't forget that if you're suffering from TVI/BCI we can supply a pack of two ferrite rings which may help. They cost £2.30 per pack to members by post.

Final-final - are you interested in microwaves? If so, did you know that the Society keeps a comprehensive stock of microwave components available to members? We have chip resistors and capacitors, GaAsFETs, doppler modules and all sorts of other bits and bobs. Ring for an up-to-date price list - and you could also enquire about a subscription to the Microwave Newsletter at the same time...

## Rad Com delivery survey

In recent months we've had many more of our UK members than usual reporting postal delays affecting deliveries of their magazine. In order to present the Post Office with hard evidence of this increasingly annoying problem, the Society needs the facts and figures and we need your help to obtain those facts.

With this month's RadCom UK members only will find a postcard containing our "quick questionnaire". Obviously, the more members that respond, the better our evidence and the more weight we will have when tackling the Post Office.

We've also used the postcard to ask some other questions - on band occupancy, EMC (a topical issue) and computers in amateur radio, so again the more replies the better.

Help us to help you!

## VOLUNTEER VACANCY

The RSGB Repeater Management Group has a vacancy for a volunteer for the job of data repeater co-ordinator.

This newly created post will involve the setting of data repeater standards, overseeing experiments and - most importantly - the planning and subsequent administration of a network of packet data repeater stations. As with all RSGB committee posts, the job is unpaid reasonable out-of-pocket expenses will be reimbursed by the Society. The principal reward will be a sense of satisfaction derived from having presided over the early stages of what is expected to become a large and complex network of stations.

The Repeater Management Group is responsible for the administration of all the repeaters in the British Isles. It meets approximately 8 times a year on Saturdays, normally near King's Cross in London. All RMG members are expected to attend at least half of these meetings and to provide written progress reports for each meeting.

Applicants MUST have a good knowledge of RTTY and ASCII data communication, including packet radio, and should be actively involved with these modes of operation. Above all, he or she must have sufficient drive, dedication and spare time to do justice to what is likely to become a very responsible job.

Applications - giving details of relevant experience - should be sent to the RMC Chairman, Mike Dennison, G3XDV, 5 Lambs Walk, Whitstable, Kent CT5 4PJ.

## Class B Morse experiment:

### 91% say YES!

Just before we went to press this month we'd compiled a report to the DTI on the Class B Morse experiment, which ended its one-year run on 31st March 1986. The report was mainly compiled on the basis of the questionnaire we ran in the February Bulletin, and it was interesting to note that 91% of those who replied to it were in favour of the facility continuing to be available.

The Society now expects the facility for Class B licensees to use Morse in this way to be written into the Class B licence. As of midnight on 31 March the facility ceased to be available; however, the Society expects that it will re-appear - this time on a permanent basis - as soon as the DTI is able to formalise it in the shape of a Gazette notice. We will advise members as soon as the facility is available again.

The results of the Raynet Zone 1 Election which took place in January/February 1986 are as follows:

|                      |          |
|----------------------|----------|
| Mr D Chilton, G6LIJ  | 7 votes  |
| Mr L A Graves, G4BCP | 58 votes |
| Spoilt votes         | 0        |
| Late votes           | 4        |

Mr L A Graves is therefore elected to be the Raynet Zone 1 Representative.



# REDUCING RF BREAKTHROUGH USING FERRITE RINGS



## Some notes on fabricating and fitting chokes

Remember the item in this issue on new books and other products available from RSCB Headquarters? We mentioned that a little pack of two ferrite rings was available from us. Well, to help you get the best out of them, the RSCB EMC Committee has recently produced a leaflet on using ferrite rings to reduce RF breakthrough. The leaflet is sent out with each pack, but we thought the information was so useful it deserved a wider circulation. So here's the text and diagrams from the leaflet:

Methods based on the use of ferrite rings can be most effective in reducing RF breakthrough. As a service to members, suitable rings are now being made available direct from RSGB HQ. The purpose of these notes, which have been prepared by the RSCB's EMC Committee, is to suggest some ways in which they can be used.

The problem of RF breakthrough into electronic equipment has been with us for some time now, and has been tackled in a variety of ways. One method involves fitting capacitors between the base and emitter of transistors; another is fitting chokes or

capacitors between IC inputs and ground. In both cases, this requires opening up the equipment to provide access to the internal circuitry.

Unfortunately, there is a serious disadvantage associated with this approach to the problem. Any modifications made to domestic electronic entertainment equipment can - and in practice often are - blamed for any subsequent faults which may develop in it.

An alternative approach involves reducing the amount of RF entering the equipment via the mains and antenna leads, and also those used to interconnect the units which make up a hi-fi system. This method has the great advantage of not involving the need to open up the equipment to reach the internal circuitry, although plugs may have to be removed and refitted in some cases. Whilst the effectiveness of this (or any other single method) cannot be guaranteed, it is an excellent first approach.

This reduction in breakthrough is achieved by inserting a high impedance at the frequency of the offending RF source in series with some or all of the

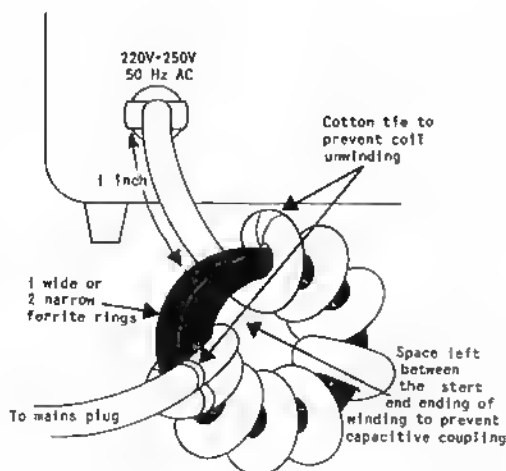


Fig 1: Ferrite rings on mains lead

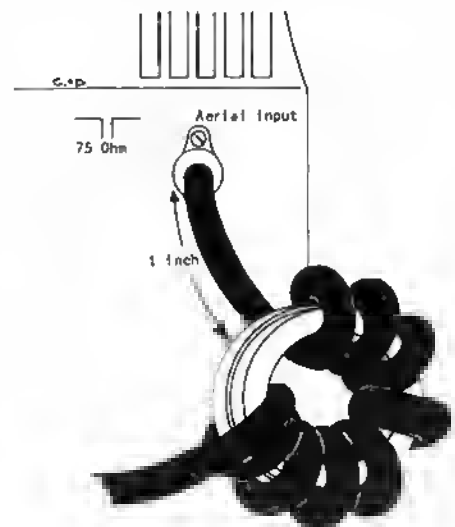


Fig 2: Ferrite rings on coax cable

input and output leads of each of the units making up the equipment. In practice, this is achieved by simply winding each lead through a suitable ferrite ring to produce an RF choke. The rings stocked by the Society are equivalent to FX1588, which is now difficult to obtain; note that many "surplus" types are not suitable for this application.

## **Fabricating chokes: winding the lead**

The chokes are made by winding the lead to be filtered through the ring in the manner shown in Figs. 1 and 2. The number of turns required is calculated by converting the centre frequency of the band to be rejected into wavelength in metres and using one turn of cable per metre round the ring. Ten or eleven turns are usually the maximum which can be wound with coaxial cables or mains leads. The number of turns is not critical because of the wide bandwidth over which the chokes are effective; for example, one with ten turns gives useful attenuation between approximately 12 and 60 MHz.

## **Fitting the chokes: making the job easy**

The chokes should be made to fit as closely as possible to the equipment which is to be protected, since any length of lead left between the ring and the equipment can still act as an antenna and inject RF into the equipment. If the cable is a continuous run from the roof (or from some distance from the set), it is easier if the turns are initially fitted loosely on to the ring. Starting at the plug, the first and second turns can be tied together as shown in Fig.1, followed by the rest. Finish off the job by tying the final turn so that it is kept away from the first turn.

In tackling a particular installation, the best place to start is the main lead(s). From an RF point of view the chokes cause the equipment to float above ground since the RF path to earth is removed. In the case of TV and FM radio this makes no difference to the received signal; a path to earth is not required because of the type of antenna and feeder used. This technique also has little effect on medium wave receivers since the chokes will have negligible impedance at these frequencies.

The next chokes which can be fitted are to the coaxial antenna cable(s). The objective here is to insert a high impedance into the screen outer in order to prevent RF from entering the equipment via this route.

For straightforward hi-fi installations, the mains leads should first be filtered, followed by the loudspeaker leads and then the leads connecting other units such as a cassette recorder.

## **Examples: vcr and sound system**

1. A stereo video recorder, with a cable connecting audio between itself and the TV, picked up a local transmitter. In this system it was found essential to fit chokes to both ends of the audio cable; if fitted only at the TV end, the system was still affected in "record" mode. It was evident that the length of cable between the VCR and the single choke was still an effective antenna. At the end of the day, this particular installation required chokes on the TV and VCR mains leads, the antenna input to the VCR and the antenna input to the TV, plus the chokes at each end of the audio cable.

2. A church sound system had four microphones and an induction system for the deaf. Eight pairs of chokes were necessary to give complete freedom from breakthrough, plus the noise generated by a local thermostat and an AM CB set being used locally. Installing and testing chokes on the speech amplifier and induction amplifier mains leads, the speaker and induction loop outputs and the four microphone inputs took about an hour. This was done without undoing any screws on the equipment, thereby leaving the guarantee valid; the cost was also less than a quarter of the estimate furnished by the original supplier. It was also done at a time convenient to all parties.

3. Experience has shown that when lower radio frequencies are involved, two chokes in series can effect a cure when one results only in a reduction in breakthrough.

4. Cases have been encountered where a TV has picked up RF signals via its chassis as well as its antenna. This has resulted in ghosting on the TV screen which could not be cleared by antenna adjustment - until, that is, ferrite rings had been fitted for interference purposes to the mains lead. After this, the ghosting cleared completely!

It is worth noting that in some equipment the entire printed circuit board and its internal leads are completely unscreened. If breakthrough occurs in this case, we recommend that the owner contacts his dealer so that the necessary modifications can be made. Even in this case, however, fitting chokes can sometimes provide an improvement in the interim, until the owner has the modifications carried out.


## **Availability: sizes and prices**

The RSGB can supply narrow ferrite rings, 40 mm outside diameter and 6 mm thick; a pack of two costs £2.30 to members including postage and packing. The price to non-members is £2.71. Order in the usual way from RSGB Headquarters.

## JAS-1 bird is go for August launch

The Japanese Amateur Radio League and the Japanese AMSAT Group, JAMSAT, have recently announced the major operating parameters of their new JAS-1 satellite which is due to be launched in early August this year.

JAS-1 was planned and has been promoted by the Japanese National Sanitary, under which the Amateur Satellite Committee has taken the role of a co-ordinating group. The large Japanese Corporation, NEC, is responsible for the manufacture of the satellite station, including its power supplies and also for system design and integration. Many members of JAMSAT are helping to construct the various electronics air-band. The satellite is to be launched by NASDA.

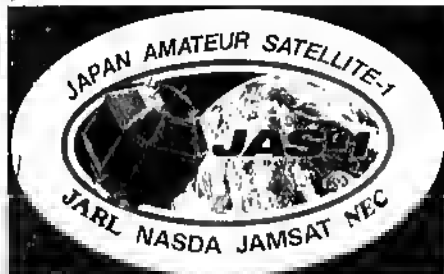

The satellite will be launched into a circular low earth orbit which will be non-sun synchronous and non-polar. Initial estimates are as follows:

Launch date: August 1986  
 Inclination: 50 degrees  
 Altitude: 1500 km  
 Period: 120 mins  
 Opening Window: 20 mins per pass  
 Passes per Day: 8 maximum  
 Satellite Life time: 3 years

JAS-1 will carry two separate mod J transponders. One will be a conventional linear transponder and the other will be a digital "store-and-forward" transponder intended mainly for non-real-time communication between packet radio stations located in different parts of the world. The packet protocol to be used is AX25 level 2, version 2, at 1200 bauds for both the up-link and down-link.

Further details of frequencies to be used will be published later, prior to launch date. The RSCB's DataBx is currently carrying information on the JAS-1 project.

**1987 President elected**

At its meeting of 18 January, Council unanimously elected Mrs Jaar Heathenshaw, GCHH, to be the Society's President for 1987. This clearly affirms Mrs Heathenshaw's great achievements during her earlier term of office in 1985.

## Operation USA

Many members will no doubt visit the USA this year, either on holiday or on business. If you visit the USA regularly you might wish to take out a permanent USA licence. It is free and available to anyone who passes the appropriate USA examinations. Details of these examinations may be obtained from the Membership Services Department at HQ by requesting the USA application details.

## RSGB slow morse practice transmissions

| Day  | Time | Call sign | Frequency | Modns   | Town                          | Notes                       |                 |
|------|------|-----------|-----------|---------|-------------------------------|-----------------------------|-----------------|
| MON  | 1030 | C4YMK     | 144.250   | A1A/J3E | Raehampton, South London      | Omnidirectional             |                 |
|      | 1400 | C400C     | 145.250   | F2A/F3E | Linns, Winst Yorkshirn        | Omnidirectional             |                 |
|      | 1830 | GW40XB    | 145.275   | F2A/F3E | Swansan, Winst Glamorgan      | Omnidirectional             |                 |
|      | 1830 | G3GNS     | 1.910     | A1A     | Locking, Avon                 | S - 12 wpm                  |                 |
|      | 1830 | G3GNS     | 3.550     | A1A     | Locking, Avon                 | S - 12 wpm                  |                 |
|      | 1830 | G3GNS     | 144.250   | A1A     | Locking, Avon                 | S - 12 wpm                  |                 |
|      | 1900 | G3GHH/A   | 144.250   | A1A/J3E | Ynovill, Gornensat            | Omnidirectional             |                 |
|      | 1900 | G3ZOS     | 145.250   | F2A/F3E | Danwon, Lancs                 | Omnidirectional             |                 |
|      | 1900 | C4DLB     | 145.250   | F2A/F3E | Bnrbrny, Oxor                 | Omnidirectional             |                 |
|      | 1900 | C41LD     | 145.250   | F2A/F3E | Rishtnn, Lancs                | Omnidirectional             |                 |
|      | 1900 | C4NZU     | 145.250   | F2A/F3E | Harslry Woodhousn, Denbyshlne | Omnidirectional             |                 |
|      | 1900 | C4PYR     | 1.888     | A1A/J3E | Sollhuil, Wnat Midlands       |                             |                 |
|      | 1915 | GM4RSJ    | 145.250   | A2A/F3E | Pnnstwlck, Strathclyde        | Omnidirectional             |                 |
|      | 1930 | G3XBF     | 144.250   | A1A/J3E | Ilford, Essex                 | Omnidirectional             |                 |
|      | 1930 | C4GBK     | 145.275   | F2A/F3E | Athnntnn, Gnnatnn Manchstnn   | Omnidirectional             |                 |
|      | 1930 | C41AV     | 145.275   | F2A/F3E | Althrtor, Grcstnn Mannhstnn   | Omnidirectional             |                 |
|      | 1930 | C4JSQ     | 144.160   | A1A/J3E | Walvenhampton, West Midlands  | Omnidirectional             |                 |
|      | 1930 | C4LLU     | 144.160   | A1A/J3E | Wolvnnhampton, West Midlands  | Omnidirectional             |                 |
|      | 1930 | C4NR0     | 145.275   | F2A/F3E | Althrtor, Grcstnn Mannhstnn   | Omnidirectional             |                 |
|      | 1930 | C4S4U     | 145.250   | F2A/F3E | Ilmrogatc, North Yorkshlne    | Omnidirectional             |                 |
|      | 1930 | C4VBL     | 144.625   | F2A/F3E | Wast Knnalngton, London       | Omnidirectional             |                 |
|      | 2000 | C14VSC    | 145.250   | F2A/F3E | Brfcast, Northnn Inland       |                             |                 |
|      | 2000 | G2FXA     | 145.525   | F2A/F3E | Stankton-an-Tncs              | Omnidirectional             |                 |
|      | 2000 | G3GMS     | 145.250   | F2A/F3E | Whltlry Bay, Tynn & Waan      | Omnidirectional             |                 |
|      | 2000 | C41NM     | 145.250   | F2A/F3E | Chnlmsford, Essex             | Omnidirectional             |                 |
|      | 2000 | C4000     | 145.250   | F2A/F3E | Spalding, Llncs               | Omnidirectional             |                 |
|      | 2030 | G3ASR     | 1.875     | A1A/J3E | Mannow, Mlddx                 |                             |                 |
|      | 2030 | G3ASR/A   | 1.875     | A1A/J3E | Bushey, Hntcs                 |                             |                 |
|      | 2030 | C41GC     | 3.535     | A1A/J3E | New Oustnn, Nanthants         |                             |                 |
|      | 2030 | C4RPQ     | 145.250   | F2A/F3E | Gondhnstn, Kntt               | Omnidirectional             |                 |
|      | 2030 | C4RWK     | 145.250   | F2A/F3E | Paddock Wood, Kntt            | Omnidirectional             |                 |
|      | 2100 | G3AVJ     | 145.250   | F2A/F3E | Huyton, Menseyslde            | Omnidirectional             |                 |
|      | 2100 | G3WOR     | 144.250   | A1A/J3E | Lanning, West Sussex          | Horizontal to East & West   |                 |
|      | 2100 | C40TV     | 145.250   | F2A/F3E | Tnnbrldnn Whlls, Kntt         | Omnidirectional             |                 |
|      | 2115 | GW2FOF    | 145.250   | F2A/F3E | Rhordds, Mid Glamorgan        | Omnidirectional             |                 |
|      | TUE  | 1030      | C4YMK     | 144.250 | A1A/J3E                       | Roothampton, South London   | Omnidirectional |
|      |      | 1100      | C41AV     | 145.275 | F2A/F3E                       | Athnntnn, Gnnatnn Manchstnn | Omnidirectional |
|      |      | 1200      | G3GNS     | 1.910   | A1A                           | Locking, Avon               | S - 12 wpm      |
|      |      | 1200      | G3GNS     | 3.550   | A1A                           | Locking, Avon               | S - 12 wpm      |
|      |      | 1200      | G3GNS     | 144.250 | A1A                           | Locking, Avon               | S - 12 wpm      |
| 1830 |      | GW40XB    | 145.275   | F2A/F3E | Swansan, West Glamorgan       | Omnidirectional             |                 |
| 1830 |      | C41LD     | 145.250   | F2A/F3E | Rishtnn, Lancs                | Omnidirectional             |                 |
| 1900 |      | G3ZOS     | 145.250   | F2A/F3E | Danwon, Lancs                 | Omnidirectional             |                 |
| 1900 |      | C4RS      | 3.565     | A1A/J3E | Gattnnck, North Yorkshlne     |                             |                 |
| 1900 |      | C4RS      | 145.250   | F2A/F3E | Gattnnck, North Yorkshlne     | Omnidirectional             |                 |
| 1915 |      | GM4RSJ    | 145.250   | A2A/F3E | Pnnstwlck, Strathclyde        | Omnidirectional             |                 |
| 1930 |      | C4BFX     | 144.625   | F2A/F3E | Barstnnd, Snnnyy              | Omnidirectional             |                 |
| 1930 |      | C4DAL     | 145.250   | F2A/F3E | Loncaston                     | Omnidirectional             |                 |
| 1930 |      | C4GBK     | 145.275   | F2A/F3E | Athnntnn, Gnnatnn Manchstnn   | Omnidirectional             |                 |
| 1930 |      | C41AV     | 145.275   | F2A/F3E | Athnntnn, Gnnatnn Manchstnn   | Omnidirectional             |                 |
| 1930 |      | C4NR0     | 145.275   | F2A/F3E | Athnntnn, Gnnatnn Manchstnn   | Omnidirectional             |                 |
| 1930 |      | C4TD0     | 144.160   | A1A/J3E | Wolvnnhampton, West Midlands  | Omnidirectional             |                 |
| 2000 |      | G3WOK     | 144.775   | F2A     | Hallsham, East Snnxnn         | Omnidirectional             |                 |
| 2000 |      | C41NM     | 145.250   | F2A/F3E | Chnlmsford, Essex             | Omnidirectional             |                 |
| 2000 |      | C4XAR     | 144.775   | F2A     | Hallsham, East Sussex         | Omnidirectional             |                 |
| 2030 |      | C4POP     | 144.250   | A1A/J3E | Blgglnswede, Bndfandshlne     | Omnidirectional             |                 |
| 2100 |      | G3HOH     | 145.250   | F2A/F3E | Stockport                     | Omnidirectional             |                 |
| 2100 |      | C4EWK     | 144.850   | F2A     | Bnrtn-an-Tnnnt, Staffs        | Beaming to the South West   |                 |
| 2115 |      | GW2FOF    | 145.250   | F2A/F3E | Ponh, Mid Glamorgan           | Omnidirectional             |                 |
| 2200 |      | G3AWL     | 144.250   | A1A/J3E | Eaalington, Ca Dnnhsm         | Omnidirectional             |                 |
| 2200 |      | C40JO     | 145.250   | F2A/F3E | Brfxham, Davon                | Omnidirectional             |                 |
| 2200 |      | C4RXR     | 144.250   | A1A/J3E | Easrgtgn, Ca Dnnhsm           | Omnidirectional             |                 |
| 2230 |      | G14NRE    | 145.250   | F2A/F3E | Ennlsklllan, Northnn Inland   |                             |                 |
| WED  |      | 1100      | C41AV     | 145.275 | F2A/F3E                       | Athnntnn, Gnnatnn Manchstnn | Omnidirectional |
|      |      | 1400      | C400C     | 145.250 | F2A/F3E                       | Lnds, West Yorkshlne        | Omnidirectional |
|      |      | 1830      | GW40XB    | 145.275 | F2A/F3E                       | Swansan, West Glamorgan     | Omnidirectional |
|      |      | 1830      | G3GNS     | 1.910   | A1A                           | Locking, Avon               | S - 12 wpm      |
|      |      | 1830      | G3GNS     | 3.550   | A1A                           | Locking, Avon               | S - 12 wpm      |
| 1830 |      | G3GNS     | 144.250   | A1A     | Locking, Avon                 | S - 12 wpm                  |                 |

| Day | Time | Call sign | Frequency | Modes   | Town                          | Notes                                |
|-----|------|-----------|-----------|---------|-------------------------------|--------------------------------------|
|     | 1830 | G4TYF     | 145.250   | F2A/F3E | Bishop Auckland, Co Durham    | Omnidirectional                      |
|     | 1900 | G2ABC     | 145.250   | F2A/F3E | Truro, Cornwall               | Omnidirectional                      |
|     | 1900 | G3KWT     | 145.250   | F2A/F3E | Leeds, West Yorkshire         |                                      |
|     | 1900 | G32QS     | 145.250   | F2A/F3E | Darwen, Lancs                 | Omnidirectional                      |
|     | 1900 | G40NB     | 28.450    | A1A/J3E | Brighouse, West Yorkshire     | Omnidirectional                      |
|     | 1900 | G4ILD     | 145.250   | F2A/F3E | Rishton, Lancs                | Omnidirectional                      |
|     | 1915 | G4ARSJ    | 145.250   | A2A/F3E | Prestwick, Strathclyde        | Omnidirectional                      |
|     | 1930 | G4GBK     | 145.275   | F2A/F3E | Atherton, Greater Manchester  | Omnidirectional                      |
|     | 1930 | G4IAV     | 145.275   | F2A/F3E | Atherton, Greater Manchester  | Omnidirectional                      |
|     | 1930 | G4NR0     | 145.275   | F2A/F3E | Atherton, Greater Manchester  | Omnidirectional                      |
|     | 1930 | G4SRU     | 145.250   | F2A/F3E | Harrogate, North Yorkshire    | Omnidirectional                      |
|     | 1930 | G4VIT     | 144.160   | A1A/J3E | Great Wyrley, West Midlands   | Omnidirectional                      |
|     | 1930 | G4WVX     | 144.625   | F2A/F3E | Burnham, Bucks                | Omnidirectional                      |
|     | 2000 | G4VSC     | 145.250   | F2A/F3E | Belfast, Northern Ireland     |                                      |
|     | 2000 | G4ATX     | 145.250   | A1A     | St Peter, Jersey, Channel Is  | Omnidirectional                      |
|     | 2000 | G2FXA     | 144.250   | A1A/J3E | Stockton-on-Tees              | Omnidirectional                      |
|     | 2000 | G3SNP     | 144.250   | A1A/J3E | Doncaster, South Yorkshire    | Omnidirectional                      |
|     | 2000 | G4INH     | 145.250   | F2A/F3E | Chelmsford, Essex             | Omnidirectional                      |
|     | 2000 | G400      | 145.250   | F2A/F3E | Spalding, Lincs               | Omnidirectional                      |
|     | 2100 | G3AVJ     | 145.250   | F2A/F3E | Huyton, Merseyside            | Omnidirectional                      |
|     | 2115 | G2F0F     | 145.250   | F2A/F3E | Porth, Mid Glamorgan          | Omnidirectional                      |
|     | 2130 | G4MYF     | 28.350    | A1A     | South East Glasgow            | Omnidirectional                      |
|     | 2130 | G4MYF     | 145.250   | F2A     | South East Glasgow            | Omnidirectional                      |
|     | 2200 | G4KZZ     | 145.250   | F2A/F3E | Coventry, West Midlands       | Omnidirectional                      |
|     | 2030 | G4YMK     | 144.250   | A1A/J3E | Roehampton, South London      | Omnidirectional                      |
|     | 1400 | G400G     | 145.250   | F2A/F3E | Leeds, West Yorkshire         | Omnidirectional                      |
|     | 1830 | G40XB     | 145.275   | F2A/F3E | Swansea, West Glamorgan       | Omnidirectional                      |
|     | 1830 | G3GNS     | 1.910     | A1A     | Locking, Avon                 | 5 - 12 wpm                           |
|     | 1830 | G3GNS     | 3.550     | A1A     | Locking, Avon                 | 5 - 12 wpm                           |
|     | 1830 | G3GNS     | 144.250   | A1A     | Locking, Avon                 | 5 - 12 wpm                           |
|     | 1830 | G4ILD     | 145.250   | F2A/F3E | Rishton, Lancs                | Omnidirectional                      |
|     | 1900 | G3BLS     | 145.250   | F2A     | Osney, Oxford                 | Omnidirectional                      |
|     | 1900 | G3Z0S     | 145.250   | F2A/F3E | Darwen, Lancs                 | Omnidirectional                      |
|     | 1900 | G4FEK     | 145.250   | F2A/F3E | Morsley Woodhouse, Derbyshire | Omnidirectional                      |
|     | 1900 | G4RS      | 3.565     | A1A/J3E | Catterick, North Yorkshire    |                                      |
|     | 1900 | G4RS      | 145.250   | F2A/F3E | Catterick, North Yorkshire    | Omnidirectional                      |
|     | 1915 | G4ARSJ    | 145.250   | A2A/F3E | Prestwick, Strathclyde        | Omnidirectional                      |
|     | 1930 | G3ASR     | 1.875     | A1A/J3E | Harrow, Middx                 | 1st & 3rd Thursdays                  |
|     | 1930 | G4GBK     | 145.275   | F2A/F3E | Atherton, Greater Manchester  | Omnidirectional                      |
|     | 1930 | G4IAV     | 145.275   | F2A/F3E | Atherton, Greater Manchester  | Omnidirectional                      |
|     | 1930 | G4NR0     | 145.275   | F2A/F3E | Atherton, Greater Manchester  | Omnidirectional                      |
|     | 1930 | G4ZPD     | 144.625   | F2A/F3E | Fulham, London                | Omnidirectional                      |
|     | 2000 | G2AGZ     | 1.818     | A1A     | Habthorpe, Lincs              |                                      |
|     | 2000 | G3GNS     | 145.250   | F2A/F3E | Whitley Bay, Tyne & Wear      | Omnidirectional                      |
|     | 2000 | G4INH     | 145.250   | F2A/F3E | Chelmsford, Essex             | Omnidirectional                      |
|     | 2030 | G3ASR/A   | 1.875     | A1A/J3E | Sushey, Herts                 |                                      |
|     | 2100 | G3AVJ     | 145.250   | F2A/F3E | Huyton, Merseyside            | Omnidirectional                      |
|     | 2100 | G3WDR     | 144.250   | A1A/J3E | Lancing, West Sussex          | Horizontal to East & West            |
|     | 2100 | G4EWK     | 144.850   | F2A     | Burton-on-Trent, Staffs       | Beaming to the South West            |
|     | 2200 | G4MYF     | 28.350    | A1A     | South East Glasgow            | Omnidirectional                      |
|     | 2200 | G4MYF     | 145.250   | F2A     | South East Glasgow            | Omnidirectional                      |
|     | 2200 | G40J0     | 145.250   | F2A/F3E | Brixham, Devon                | Omnidirectional                      |
|     | 1030 | G4YMK     | 144.250   | A1A/J3E | Roehampton, South London      | Omnidirectional                      |
|     | 1830 | G40XB     | 145.275   | F2A/F3E | Swansea, West Glamorgan       | Omnidirectional                      |
|     | 1830 | G3GNS     | 1.910     | A1A     | Locking, Avon                 | 5 - 12 wpm                           |
|     | 1830 | G3GNS     | 3.550     | A1A     | Locking, Avon                 | 5 - 12 wpm                           |
|     | 1830 | G3GNS     | 144.250   | A1A     | Locking, Avon                 | 5 - 12 wpm                           |
|     | 1830 | G4ILD     | 145.250   | F2A/F3E | Rishton, Lancs                | Omnidirectional                      |
|     | 1830 | G4TYF     | 145.250   | F2A/F3E | Bishop Auckland, Co Durham    | Omnidirectional                      |
|     | 1900 | G3Z0S     | 145.250   | F2A/F3E | Darwen, Lancs                 | Omnidirectional                      |
|     | 1900 | G4PJZ     | 145.250   | F2A/F3E | Mapperton, Notts              | Omnidirectional                      |
|     | 1930 | G3HV1     | 145.250   | F2A/F3E | Stoke-on-Trent, Staffs        | Omnidirectional                      |
|     | 1930 | G4GBK     | 145.275   | F2A/F3E | Atherton, Greater Manchester  | Omnidirectional                      |
|     | 1930 | G4IAV     | 145.275   | F2A/F3E | Atherton, Greater Manchester  | Omnidirectional                      |
|     | 1930 | G4NR0     | 145.275   | F2A/F3E | Atherton, Greater Manchester  | Omnidirectional                      |
|     | 1930 | G4GBK     | 3.565     | A1A/J3E | Chorley, Lancs                | Omnidirectional                      |
|     | 1930 | G4WVX     | 144.625   | F2A/F3E | Burnham, Bucks                | Omnidirectional                      |
|     | 2000 | G3RR      | 145.550   | F2A/F3E | Barnoldswick, Lancs           | Omnidirectional                      |
|     | 2000 | G4INH     | 145.250   | F2A/F3E | Chelmsford, Essex             | Omnidirectional                      |
|     | 2030 | G3CAR     | 144.625   | F2A/F3E | High Wycombe, Bucks           | Omnidirectional                      |
|     | 2030 | G40C      | 145.250   | F2A/F3E | Horwich                       | Omnidirectional                      |
|     | 2030 | G4RC1     | 145.250   | F2A/F3E | Horwich                       | Omnidirectional                      |
|     | 2100 | G3AVJ     | 145.250   | F2A/F3E | Huyton, Merseyside            | Omnidirectional                      |
|     | 2115 | G2F0F     | 145.250   | F2A/F3E | Porth, Mid Glamorgan          | Omnidirectional                      |
|     | 2200 | G3AML     | 144.250   | A1A/J3E | Easington, Co Durham          | Omnidirectional                      |
|     | 2200 | G4RXX     | 144.250   | A1A/J3E | Easington, Co Durham          | Omnidirectional                      |
|     | 1200 | G3GNS     | 1.910     | A1A     | Locking, Avon                 | 5 - 12 wpm                           |
|     | 1200 | G3GNS     | 3.550     | A1A     | Locking, Avon                 | 5 - 12 wpm                           |
|     | 1200 | G3GNS     | 144.250   | A1A     | Locking, Avon                 | 5 - 12 wpm                           |
|     | 1830 | G40XB     | 145.275   | F2A/F3E | Swansea, West Glamorgan       | Omnidirectional                      |
|     | 1930 | G4TDO     | 144.160   | A1A/J3E | Molvorhampton, West Midlands  | Omnidirectional                      |
|     | 1930 | G4VBL     | 144.625   | F2A/F3E | West Kensington, London       | Omnidirectional                      |
|     | 1930 | G4XQ1     | 145.275   | F2A/F3E | Stockport, Greater Manchester | Omnidirectional                      |
|     | 2000 | G4TKM     | 145.250   | F2A/F3E | Birmingham                    | Omnidirectional                      |
|     | 2115 | G2F0F     | 145.250   | F2A/F3E | Porth, Mid Glamorgan          | Omnidirectional                      |
|     | 0915 | G3WNR     | 145.250   | F2A/F3E | South Shields, Tyne & Wear    | Omnidirectional                      |
|     | 0930 | G2F0F     | 145.250   | F2A/F3E | Rhondda, Mid Glamorgan        | Omnidirectional                      |
|     | 1015 | G3GND     | 1.875     | A1A/A3E | Cheltenham, Glos              |                                      |
|     | 1100 | G2FXA     | 1.910     | A1A/J3E | Stockton-on-Tees              | Omnidirectional                      |
|     | 1100 | G3BLS     | 145.250   | F2A     | Osney, Oxford                 | Omnidirectional                      |
|     | 1200 | G3GNS     | 1.910     | A1A     | Locking, Avon                 | 5 - 12 wpm                           |
|     | 1200 | G3GNS     | 3.550     | A1A     | Locking, Avon                 | 5 - 12 wpm                           |
|     | 1200 | G3GNS     | 144.250   | A1A     | Locking, Avon                 | 5 - 12 wpm                           |
|     | 1200 | G3HV1     | 145.250   | F2A/F3E | Stoke-on-Trent, Staffs        | Omnidirectional                      |
|     | 1200 | G3PER     | 145.575   | F2A/F3E | Heysham, Lancs                | Omnidirectional                      |
|     | 1815 | G3WNR     | 145.250   | F2A/F3E | South Shields, Tyne & Wear    | Omnidirectional                      |
|     | 1830 | G40XB     | 145.275   | F2A/F3E | Swansea, West Glamorgan       | Omnidirectional                      |
|     | 1830 | G4NZU     | 145.250   | F2A/F3E | West Bridgford, Notts         | Omnidirectional                      |
|     | 1900 | G4PYR     | 1.888     | A1A/J3E | Solihull, West Midlands       |                                      |
|     | 1930 | G3LDH     | 144.250   | A1A/J3E | Halesowen, West Midlands      | Omnidirectional                      |
|     | 1930 | G4VBL     | 144.625   | F2A/F3E | West Kensington, London       | Omnidirectional                      |
|     | 1930 | G4XQ1     | 145.275   | F2A/F3E | Stockport, Greater Manchester | Omnidirectional                      |
|     | 2000 | G4TKM     | 145.425   | F2A/F3E | Birmingham                    | Omnidirectional                      |
|     | 2005 | G30LU     | 145.375   | F3E     | Braintree, Essex              | Omnidirectional                      |
|     | 2100 | G3H0H     | 145.250   | F2A/F3E | Stockport                     | Omnidirectional                      |
|     | 2100 | G4EWK     | 144.850   | F2A     | Burton-on-Trent, Staffs       | To South West                        |
|     | 2100 | G4TET     | 145.250   | F2A/F3E | Great Barr, Birmingham        | Omnidirectional                      |
|     | 2130 | G0BUW     | 144.250   | A1A/J3E | Maldstone, Kent               | Tilted polarisation to North & South |
|     | 2130 | G3DRP     | 144.250   | A1A/J3E | Maldstone, Kent               | Tilted polarisation to North & South |
|     | 2200 | G40JD     | 145.250   | F2A/F3E | Brixham, Devon                | Omnidirectional                      |

# THE Members' Ads PAGES

## FOR SALE .....

COHMAN EQUIPMENT: BC454 RX 3-6MHz, BC455 RX 6-9.1MHz, BC456 modulators, BC457 TX, 4-5.3MHz, BC458 TX, 5.3-7MHz, others? Eddysters 5870A, £25. Asotchs fcs spars FOC, Hallisssotrs 538, poar, £2.50. Bryer sallrsts ar sarriagr xtrs, Plrase wslta C68T0, OTHR.

KW2000 & par, rxrllert stasdy rlg for slrb, £170 oso. Hassy, Riso, tel: 030482-4441, 8am to 4.30pm.

TS8305 HF TCVR ox sordx with original parking rlr 1575, CH3WCS, OTHR, tel: 0383-726456.

FT1030 HF RIG, FP103 par, display seds atts, £430 Trl-basd 3-ele beam, £60. IC202E, nissds, original pasklsg, £95. Sota 100W ltreas, pse-amp, £95. MH432/285 svtr, £22. C350A, OTHR, tel: 0602-625099

TR10 TR8400, 10W UHF TCVR with sarrlsg mls & moblla morst, £185. HML432/50 UHF 11nhas with prs-smp, 10W 1/p 50W o/p, £85. Homebrsw 144MHz 2N6084 pa & pra-amp, 10W 1/p 50W o/p, £45. C8CHJ, OTHR, tel: Waymouth 789022, xvsrlngs.

TERMINAL-BURROUGHS MT686 1rtollgrtt-vdr, 3x1802 mlsrpsocssess +64k RAM s/w keyhoas, ssqrlrs morlts, £25. Meslts los MT686, £45. Modem lrsdata 307 - 300 bsr(psalssalosal asoustls sorplad, £30. Chas Masklsssn, CMBLHA, OTHR, tel: 0224-704844, daytma or 641695, svrlngs.

OSCILLOSCOPE NACARD 311, double beam, 100V/sm, masral, £35. Ardlo slg/ges, Massosol TF195H, mosral £25. Mulrhead FAX RX, D900, masual, £35. Industlor motor, 1/2 HP, £10. Virtags Ollvottl typawlltrr, £10. Bryrr sollrsts, CBCLG, Snnryssollt, Croat Hasslrgam, Nesfolk, tel: 048 524-563.

TR0 s/w malsr psu, 6 soll packs, £45. BC221T 125kHz-20MHz s/w built-lr malsr psu & sallbrator £25. Poyre, tel: West Haddar (078887) 684.

VHF MULTIMODE FDK MUL11 750E plus 8-olr Yeg, both vgs, £250. No11, COCBH, tel: 0924-451537.

FDK MUL11 PALM 4 70sm hardheld, 1W, FM, 6sh (SUB/SU20/RB2/RB6/RB11), gs, s/w slsds, s/saso, hellsal & hasdbook, rsarrst ofsr to £85, dellvory Treo. Stovo, G4WXC, OTHR, tel: 0476-77708.

ICOH IC260E TCVR & MML144/40, vgs, £220. Fergusos, tel: 0463-241211.

HEATHKIT MICROPROCESSOR TRAINLR ET3400 (for 6800) ard corssr with lrtoslsclsg experlmests EE3401, unussd, £200. C3G10, OTHR, tel: 01-567 0389.

FT700 MF TCVR with psu, ex sordx & gmo, ressstly roallngod, some sparo valvss avallabll, vrry tidy rlrar radio, ldoal los llrst HF radio, sas dellvory West Hldlands oly. C6ZHR, OTHR, tel: Tamworth (0827) 874010.

TEN-TEC 228 atr, swr brldgr, 1.8-30MHz, 200W Intermlltrst 100W sortlrsors, swltshod Tor drmy load, bypsss, soox's, 1/wlse, twln Trndss, vgs, gwe, £55. Sharp, tel: Dorby 700610.

ICOM 271E, 25W multimode-basr/str with muTek f/erd vgs, £540. COBOP, NOT OTHR, tel: 0642-590416.

IC251E TCVR with muTek boesd, £425. Yoso 2m-90C 11reas amp, £105. SMC psu 8A, £30. Heathkit HW202

2m FM, 6ch xtal sig, ro xtals, £40. GIGZA, QTHR, tel: Thorrbury 412185.

EDOYSTONE EC10 Hk2, vgs, masral, ssts, molsn uslt, bryes sollsts, £75. WANTED: Atlas 215X with manuals in mlt sordx. Also wantd Trlo R1000 rrt diagram. C3FK, OTHR, tel: 0202-873175.

MICROWAVE MODULES 144/100-5 11seas amp, £95. Osae 12A psu, £45. Welz CH-20A soxslal swltsh, £10. All ltems as rew, try ar offer! G4UWW, tel: Colshstrrr (0206) 395720.

KW 2000B plrs malsr psu ard hardbook, £150. COOKW, 36 Georgo Avrrrr, Skrgssas, Llracs.

TR10 TS530SP, mltst, 270Hz & 1.8kHz Tiltoss, £600. Jaybeam, rrw upresd, £150. C31CH, OTHR, tel: 0823-680234.

FT290 s/w soTk rasr, nlrads, hollrsl, moblls mornt £225. Toloroader CW680 CW dosodrr, £90. Dstnsq sprrrh prorsoss modlr, wasklrg, lr dlerast box, £25. C3RSJ, OTHR, tel: 0392-32797.

YAESU FT708R, ss sw, sase, oslgisel pasklrg ets, 1130. Sony 76000, ds odaptor, ax sordx, £105. SHC T3-170L pwr/swr mtrrr, £10. Orar wsvsmtrr, £15. Post extsa. C6XYZ, OTHR, tel: Rodslllfe 2327.

TR10 TR9130 mltlmode moblls, gs s/w sssvlsa manual, oTltslsl mod Tor 10W low powas, all modss, ldsal for llrrar, oTlrrs over £340 lplus sarllsgol gofgr FM only. G8PWA, OTHR (Poele).

ICOM IC251E with muTok, gr, £425. C4UFG, OTHR Masshrstrs, ts1: 061-633 7892.

SWAN 500 TCVR also matchlrg psu/spks, vgs, 480W pep, just bses sevalvrd, £250, bryes sollsts os pays rarrlgr. C4SKO, OTHR, tel: 0742-466530.

FT290R with 9-olr Tonrs artrrra & rotatos, slso Allsso 11nasr, nreds attastlss, £220. Soss ICF2001, £75. C3LIV RTTY BRC lstrsfase, £25. C4VJO, tel: Emsworth 374458.

YAESU FL2100Z HF 11ness with WARC bands, vgs, boxod, 1425 o/s. Pstes, G1ELK, NOT OTHR, tel: 01-804 4565, attes 6pm & waekerds.

FT-ONE £1,200. Heathkit 5B200, 1kW HF 11rear smp, £250. Both gs. Halland, COBXR, 29 Heads Lase, Hessla, N Humberslds, tel: 0482-643165.

NHT 432/50 tvtr, 50MHz IF, ldrsl Tor 70cm, C8AYY, OTHR, tel: 021-783 2996, evrslrgs or wrrkonds only

PRIME HF CONTEST & DX LOCATION Is north Welss. 3 bsd seml, ges 11rsd heetlrg, ssd plot, eesy sssrs to M4, £24,000. 60' tower, sablos ots, segotlablr. C4BLE, tel: 0633-613756.

80m QRP CW TCVR (llowes modules) s/w stsblllsd par, £60. Curtls shlp lamlbs keyer, malsr/battersy r/w MK704 sqgrozr paddlo on hslf Inch steel bass, £50. WANTED: 2ott 813 basss. C3RB, OTHR, Tyreslds, tel: 091-253 0504.

TR10 9130 2m mltlmode, 2 harrs rsa oly, £375. M100M psotesslssal gas/sov RX, VLF-30MHz dgltral rrraduat to 1Mx, all sold stete, £600, oTlrrs? WANTED: Photographls rqlpmsrt, equivalent valus, HF TX/RX WHY? G6SFO, OTHR, tel: Orortlold 413413.

VERSATOWER P60, £350. Trlo TR9500 70sm all modss, lrs1 B030, £295. lsam IC471 70cm basr/str, £585. All ltems gs. Desks, tel: Lymm (Chrsalre) 3796, befose 9pm plrsr.

TR10 TR9000 2m mltlmode with PS10, hradstot mls, moblls mornt, £310. TR9500 70sm multimode with mobllr mornt, £290. Both with mllrsg Tor base/stn rsr. 1T rollertod, both sams with 10x rTr brams.

G8FOT, NOT OTHR, tel: 0403-56245/40414 (Horsham).

HALLICRAFTERS SX-117 RX, matchlrg HT-37 TX, 180W SSB/CW, £250. Rasal RA-17 RX, vgr, £120. KW77 RX, £90. KW Virrovr TX, £50. Coder PR-30, £20. SX-42 RX, £125. P/exsh wsst FT7B, Shlmizu SS10SS QRP, 70sm Rlrgo, Blark Star 600MHz sourter. C4AFY, tel: Klddrmlrster (0562) 747480.

SHACK CLEARANCE: 10FM DMT40 29.310-29.7MHz, £25. NATO 2000 all mode 28.0-30.0 MHz 10W, £130. C1110 3-30MHz 120W solid-stete 11rear, £55. Oalwa RF670 speech psorrssos, £25. Lightwollght sotatas OK4 2m beam, £25. MMB11 braskrt Tos 290,790, £12. C4TKP, OTHR, tel: Dorby 383442.

FT290, slrsds, MB10 rhgs. FT708, NC7 70sm hssdheld alsa Palm IV shgr ets. EC10 Eddyssote RX. R209 Army RX, R1155 olssalt RX. A14, RF amp, etu Army Hospssk. A510 HW2 Harpask, smpate sts. Browrlr No.2 ssystat sat. Thsndss 5MHz prlse gsesator. G4OFD, tel: 01-949 2317.

MARINE EQUIPMENT: Osear Star 25W synthrsalrd R/T, £125. 6rh basdheld, 11rads, £85. Ultrssossls dsph sourdr, brand rrw, 4 sasgos, TV display, £85. Also Pye PF1 TX, £10. Cssrd talrplsstes, good osdrs, £20. Dymar L/B FM, 25W base, £45. C6HLK, tel: 0538-382117.

FT730R 70cm 10W mobllr, 10 memorlrs, £165. AOR240 140-150MHz 2m hardhrlld, slsads & shgs, £85. FT202 2m hasdhrld, 6ch, £60. TH21E, spase nlsads, sase, £135. 10W 70cm amp, £20. WANTED: shsep 2m moblllo, 25W 2m 11ness. C6HLK, tel: Lesk 382117, daytms.

DRESSLER D2005 11rear, £550. Dcrrslrr D2005 11seas £600. FT726R, 2m/70cm/sat/HF (10m/17m/15m) modlrs Tltsd, £950. Hrtek GFBA144E, £80. Powrs spllttr, 140MHz 2-way, £25. RF spersh psosossos 5P4RF, £40. ATU FC707, £65. C6WHM, OTHR, tel: Southampton 437888, evrslrgs or wsskerds.

YAESU FT301 HF TCVR, matchlrg psu, £295, MH144/28 tvts, as rrw, £55. 4-elo 70MHz Jeybrom, naw, £20. 14-rlr Parabrom + 15m sablo (rsrd ls 3 sossstss osly), £20. 4-sla 144MHz Jsbsam quad, £10. Asahl sws/pms metes, £8. Oroko TV-3300-LP 1KW LPF, £10. Mlrrs balur, 600-50 ohm, 1.5-30MHz, 750W pep, £15. 2ott Oragor 32 comptrrs, oro Trlty, s/w merusl, 5 baeks rr Oragor & dems rarrlgrd, £65. Ex-PO par +5V @ 2A, +12V @ 1A, -12V @ 1A, +24V @ 500mA and 5V floatlrg @ 100mA, £20. Tordrn TH100/2A derblo slndd, daublr dssltly dlsr dslvr, ssw s/w spases and masual, £60. Flrko 9010 mltro system tsorblsshootor wlth 280 asd 6502 pods, s very powasTrl plss of tsst sarlpmort, all populas 8/16/32 btl prassorsrs srppostad, s/w psobos, masuals, tapes, ots, ary oTlrrs? Sollgr telophoto room lars, 90-230mm, £55. lars, tel: 0202 825727.

REOIFON R408 psotesslssal rommlsations RX, 13kHz-28MHz rortlrrrs sovorogo, 160Hz-8kHz vaslable basdwlth, sx sordx s/w workshop manual, 1390. Trlo 7010 TCVR xtala & vTo, £85. C6WHX, OTHR ts1: Yark 410146.

YAESU FT757GX HF TCVR, £600. BH05 LPM-144-10-180 11rrar, £220. Both s/w DT1 sts rpost to verlly slras o/p (at tme of tsst). Mulsx FT290R pre-emp, £22. RM 432MHz tvtr, 28MHz IF, £115. WANTED: IC451E. C4RNI, NOT OTHR, tel: Starley (Co.Orsham) 235569.

TIMESTEP ELECTRONICS astelllste interfess 2.0 s/w pwr leed & EPROM Tr BRC romptor. Rover RS2000 srarrlrg RX modlTr Tor setrlllr rrrrrptos. Frll dosumestotles, (sor my ostrlo HRT Oct '85), £320. C3ROC, NOT OTHR, tel: 01-455 8831.

FT209R, £195. HL45V 70sm 45W, £115. FRG7700M-ATV, £300. Sota 40W 2m 11rrar, £45. 70cm+2m duplsxrr, £25. Trlo 9130, £360. Crstomrr rallrsts. C4MH1, OTHR, trt: lpswlrh 714563.

RSGB Members' Ads - seen by over 37,000 amateurs & SWLs each month



TOMNA 5-ale crossed 2m Yeg1, ex condx, £20 or exch for 2m collinear, 2m 7/8 mobile or WHY? G3NOX, tel: 09952-5590.

YAESU FRV7700D VHF cvtr, 118-130MHz, 140-150MHz & 70-80MHz. New condx, £30. G3ZZR, QTHR, tel: Wfney (0993) 3792.

YAESU FT790R 70cm portable multimode TCVR with memories, scanning etc, lmmac, £250. Yag1 antanno 70cm 8-ovar-8, 50' faador, £15. Penury lercec sala Jon, G6VJ, QTHR, tel: Sovereign (0732) 456553.

FM BOARD for Shimizu SS105, brand new, never used £50. GOCCH, QTHR (on G1BVY), tel: 0742-481158.

TR7800, 25W FM mobile, keypad entry, 15 memories, mic, mobile bracket, manual & box, gc, £160 cash, buyer collects. WANTED: Mobile bracket for Irida 3200 & manual for Ikontronix S33 scope. G4PHC, QTHR, tel: Minahad 6936.

COLLINS 30L-1 linear, latest production version, mint condx, virtually unused, ideal companion for KWM-2A or S-11na, collectors item. Also 136B-2 nelsa blankor ltr KWM2/2A. G4DFU, QTHR, tel: 0602-626626.

ICOM IC2E, BC25E chgr, ICHM9 spkr/mic, vgc, incl vinyl case, operating manual, £115 ono. G8XHP, QTHR, tel: 0724-872727.

TRANSVERTERS: 2m-70cm; PMT432/144, £110; SSB Products TV144-432, £75. 2m-HF; WPO Communications 20/15/10m tvtr, boxed, £80. Antennas: H01 Minibeam £65; Tonna 70cm 19-ale crossed, £15; Sonim 2m 9-ale crossed, £18. Ootong D70 Horse tute, £35. G4YBU, QTHR, tel: 01-393 9691.

SMALL COLLECTION OF CLANDESTINE RADIOS, incl B2 (antennar version) in near mint condx, rone 121 set type A and 12B sat. Xals & sparo volves incl. Serions offers around £500. G4IMO, tel: Ottershaw (Surrey) 3892.

TRIO 2300 portable or mobile TCVR c/w nleods, algr & accessories comprising kit built pre-amp & 10dB pa, 7/8 antanno (SMC78F) msnctile & wing bases plus cable & connectors, £110 ono. G1ELZ, QTHR, tel: 0980-24391, avonings.

HWB QRP, 80-15m, 11tdat swr/pwr, RIT, frequency counter o/p, monuol, vgc, c/w, matching sold stote broadband linear, 80-10m varl pwr o/p, fully switched. Contant psn 13.8V included, £150 ono or exch 2m 558 CW TX/RX. CQAYZ, tel: Cosport S89560.

SILENT KEY SALE: TS8205 ant vto, mic & spkr, £600 ono. KW107 otc, £30 ono. KW108 monitor scope, £90 ono. Cotronica 180MHz counter, £50 ono. Kotsam kayor with sidatona, £15. Datong FL1, £30. OIlorc? G8ALR, QTHR, tel: 0264-23741.

TRIO TR7500 2m FM, £120, 11T Starphone 2m FM, £30. UHF Westminster litted 8ch on 70cm, £75. PF70 3ch litted, £50 plus battery chgr, £25. SFI Starphone 70cm with batteries, £25. G4LUL, QTHR, tel: 0457-65185, after 7pm.

HF TCVR, home mode with FL110 linear 15/20/80, bargoin, £150. IC202, £50. 10m multimode 28.40-29.700MHz + psu, £35. Small rotator + 2m ZL, £24. WANTED: ALM203E or similar, mint only. John, G4RCU, QTHR, tel: Rugby (0788) 68397, avonings.

TRIO TS5305, new bands, £450 ono. HF linear omp, 80-10m, professionally built in two 19" cabinets. Singla 4-400 possive grid, adjust, EMT, topped primory auto-transformer, £150 ono. Many metal oetals. G3FRB, QTHR, NO PHONE CALLS.

ALTAI GDO. Kenwood SW100 mobile meter for VHF. Kenwood separate skw. Leader RF sig/gcn LSC-16. Cumano 40T/S/S disc drive. OIlorc? Steve, G6SCA, 15 Elvington Groscent, Leconfield, IW17 7LO, tel: 0482-52116.

RX HEATHKIT RG1 gen/cov, molns, blo, 1MHz marker, hondbook, £35. Motors: 2.75" dlo, 5mA, 20mA Western, 30mA, 50mA Western, 1mA USA, 500uA; 2" dlo 1mA, 25mA, 30mA, 50mA; £3 ea. G3HBL, QTHR, tel: Bury St. Edmunds (0284) 60984.

YAESU F1480R multimode TCVR c/w handbook, servica manual, 5/8 whip antenna & mag-mount, vgc, £275. R1000 gen/cov RX, 200KHz-30MHz, AM/SSB/CW, hondbook & servica manual, excellent, £185. G3RDC, QTHR, tel: 01-455 8831.

THIESTEP ELECTRONICS weather satellite Interlace for BBC computer c/w ROM. Revco RS2000 AM/FM scanning RX, used with system, full documentation, all in £320. Pace Nightingale modem, still under guarantee c/w Commstar ROM. leods, monuols, £100. G3RDC, QTHR, tel: 01-455 8831.

IC240, £90. Phillips FM321 70cm mobile Datong FL1, £35. Tone 1/3 in 50 out 2m linear, £45. HML432/50, £85. 4-ale 2m quad, £15. Eddystone dileast 5-meter EWS. HM12A plus new HP23B, £80. Alan, G4HMF, QTHR, tel: 0473-51319.

SHACK CLEAN-OUT: PC1, £95. TS130S, PS30, OFC230, £550. FC707 atu, £75. FT9010M, all options, FC901, SP120, £600. TR7930 25W mobile, £235. 1R2300, £95. All gc, boxed, monuols, collect or pay eorrlcgc. HML432/50, £85. Alan, G4HMF, tel: 0473-51319.

SWAP FOR HM7, HW8, 10m FM box, Hizuo 2m SSB portable. Codor A15 1X plus psu, leods, pristin condx. ZL11H SSTV boards plus all IC's incl RAM cash adjustment as regulred, G4XBD, tel: Stavenog (0438) 62554.

FT757CX, FT757AT, FP757MD, ex condx, boxed, hardly used, £900 but will split. Thomas, tel: 021-449 6803.

YAESU GPV2500R, 2m FM TCVR, digital display, mems, keypad, mla, 25/3 o/p satlings, a new o/p amp 11tdat, £150 ono. Tim, G1CHI, tel: Cheltenham (0452) 576411.

1W4000A by Trio/Kenwood, FM dual band TCVR for 2m & 70cm c/w the usual bits, £395. C4JEF, Sullelk, tel: Rattlasdon (04493) 7764.

KW202 RX, vgc + handbook & sparos, £100. Stevo, GOCCH, Southport, tel: 0204-69013.

H0-1 2-ale triband Minibeam, vgc c/w 25m UR67 coax + extra frequency spokes, on tower 7 months only, uncalimed order, £60 purchaser pays carriage very good bargain. G4HVM, QTHR, tel: 0202-36306.

FT290R c/w chgr, nleods, case & strap, unmodillad, gc, £215. Mike, C4TVP, QTHR, tel: 0473-76667.

TRIO IS780 2m & 70cm multimode, as new, unused, still under guarantee, £800 ono, genuine reason for sale. G1HBD, QTHR, tel: 01-898 0996.

SH30 mast, inner tube + cable, new, £25 + haulage. G4XEO, tel: 0292-268055. Multiscope Yaesu YO-901, vgc, annecton cables, £250. G4XEO, tel: 0292-268055. H01 mini-beam, boxed, used 6 months, spara spares, £100. G4XEO, QTHR, tel: 0292-268055.

BBC B, Viglan (tec) 80/40 track disc drive, incl OFS utilities disc & interface components (except B221 antrollder), £100. Acorn taletxt adaptor, £150. GOC software \*RTTY ROM (incl 1U details), £15. Also various games & books. G4XU1, QTHR, tel: 0322-77401.

MULTI U11 70cm scanning TCVR ex orig condx, mla, mobile mount, very little use, £140. Icom IC22A 2m TCVR, vgc, mla, mobile mount, £120. Lunar modules HF amp, HF3-10012 10W ln/ 100W out, aut 15120/130V FT7 otc, original condx, 2hrs use, £125 C4CDH, Wrrral, tel: 051-334 1819.

HRO, £30. Band spread colls, £5. RX1224, £15. BC221E, £25. Mini-mittar, £20. KW Vongard, £25. Band checker, £5. Laylayatta vto, £12. Epsom arao, buyer collects. Potter, tel: Ashtad 72689, after 6pm.

ICOM IC27E 25W 2m multimode bosc stn only 3 months old, £250. Mansan pep/rms swr/pwr meter, 50-150MHz £50. CBETO, QTHR, tel: 0793-694479, avonings.

HFSV 5-band verticle antenna c/w radial kit, ex condx, £65. G3BFL, QTHR, tel: 0635-298492.

YAESU FT107M with OMS (for split frag working) 500Hz CW 11lter, all solid stote, 160-10m, vary ralltable, £450 or £510 with FP107E 20A psu/spkr. WANTED: TS9305 in gc. G4OBK, tel: Cherley 74451.

SEVERAL STORNO GOM614 (hl-band 10ch FM boat mount, most with control units), £25ea. Several 11T Star (hl-band Sch FM dash mount, most with spkrs) £35ea These radio telephones are all solid-state & easily converted to 2m. G3RIK, tel: Rochdale 33400 after 7pm.

JVC CX610UB multi-standard 6" colour TV, VHF/UHF PAL/SECAM, complete with nlead pack, carrying casa & de lead, £245 ono. Thondor 1F200 lreq ceuntar in original packing, £125. Sony ICF7600 RX in gc, £105. Pantax HF with power winder, £120. G6JNS, tel: 0905-620041, anytime.

SEM TRANSMATCH 3.5-30MHz, £45. G4HHC, QTHR, tel: 01-878 5303.

SIOEWAYS ROM/RAM expansion for BBC micro CVX16 by Computer Village, £15. Hitachi V202F dual beam scope, 20MHz, £225 or exch for SH220 stn monitor with BSB pondadaptor with cash adjustment. Ikontronix 202-2 scope trolly, £20. G4RKO, QTHR, tel: 0635-60263.

30' TOWER, 3 boxed sections, tilt-over c/w base post, winch, £245. Calder, tel: Brentwood (0277) 22525 or Ingrebourne 45470.

DRAKE TR4 HF SSB/CW TCVR, new valves, £275 ono. Solartron G1436 dual trace scope + probas, £25 ono Buyer collects. G8RMC, QTHR, tel: Camberley 32155.

YAESU FT102 HF TCVR, 11rst class condx, hondbook, mla, original packing, used for stonday only, £525 G3PJX, QTHR, tel: 061-643 3213, after 7pm.

FT209R plus PA3 chgr & MH12 spkr/mic, 12 months old, boxed, £190 ono. Complete set of working Omega modules, cosa etc, phona for detollis. Wordwisa+ EPROM for BBC in original packing, £30. Forth 85 EPROM, £30. Evans, tel: 051-228 3237.

WESTOWER 42' heavy duty talascope tilt-over galvanised tottice tower, Emoto rotator, TE1 3-ale tri-band Yag1, £420 complete. LGL TCVR, QNT TCVR, both converted 29.3-29.7MHz, £25ea. Cubical qnod steel spider, £10. G4IXV, tel: Kidderminster S15305.

TR580 model 1, level 2, 48k, manual, books and software, bargoin, £40. C4GRU, QTHR, daytime tel: 061-439 5050 extn 3450.

LIGHT OUTY ROTATOR, control box, 20m cable, 8-ale SOY 2m antanno. G1CPE, QTHR, tel: Lomington Spa 30178.

YAESU FT730R 70cm 10W FM mobile TCVR, unnsed in maker's packing, £200 ono carriage at cost. G1JHR, QTHR, tel: 0252-25165, avonings.

MICROWAVE MODULES 23cm tvtr, latest model with GaAsFET pre-amp, little used, £165. Trio JR599 custom apsal RX, vgc, 160-2m, £125. HFS verticle antenna, 80-10m, used RX only, £40. All ono ond as new. Baxter, tel: Hnddersfield 666497.

YAESU FT101E, £300. FC107 atu, £75. FT207R, MC3A chgr/psu, YK24 spkr/mic, £175. Datong D70 Morse tutor, £40. HFSV/HFSR ont, £50. Morse key, £20. All vgc c/w manuals etc. Martin Swain, G4HVK, QTHR, tel: 0734-723512, anytime.

COMPLETE STATION: FT290R, HM25L, Wolz 100W pwr/swr meter, AP3 speech processor, 12-ale ZL, wall brackets, pole, 2011 psu's, 27' portable mast plus 12-ale ZL plus cables, AR250 rotator plus cables. £350. G1HBD, 9 Althorpe Way, Stratton, Burton-on-Trent.

TRIO TH21E 2m handheld with chgr & spara battery pack, £130. Tonna 23cm 23-ale, never used outside, £20. Jaybeam HMBH8 70cm 48-ole, £20. All ono. G3ILO, tel: Nallsworth (0453 83) 3411.

FG707 atu, vgc, £75. HK708 key, boxed, £10. SMC OL150 50/150W, £10. Hiroga 2m linear, 25W 1/p 160W o/p, pre-amp, £75. Consider exch 2m handheld or WHY? CDDJH, QTHR, tel: 07372-40815, avonings.

OLD COSSOR 1035 d/beam scope, manual, some sporo valves. Alao B40 RX manual reasonable condx. WANTED: help, advico, ccts etc, replacing valved 11 RX atago with transistors (Irequncias 500 ond 800kHz), offers? Chris, G6YAH, tel: Raigote 22200.

LEAK STEREO '20' AMP, variable pra-amp, trough 11ne 2 FM tunor, CL75, Phillips starao cossatta recorder, KEF apkr's, all in vgc, buyer collects, offers? G4FXS, tel: 021-458 3537.

HFS VERTICAL ANTENNA, 10-80m + radial kit, £45 ono Also Pys Westminster WF15FM 2m, xtols R6/520 fitted, c/w aarvic manual, any reasonable offer considered for good home. Brian, tel: 0422-206539.

VERSATOWER P60 c/w safety brako winches, HR2 rotary boaring, vgc, new £760, soll £500. MET 19-ale, £25. Don Hughes, G8MPL, 12 Spancor Stroot, Raddish, Stockport, SK5 6UH.

TRIO 120V TCVR with psu, lmmoc, boxed, as new, with manual. Also swr/pwr meter & HFS antanno c/w radial kit, unused & boxed, 30' low-loss cable 11 buyer collects. £350 tho tot. G3VNP, QTHR, tel: 0245-74335.

TRIO SEPARATES, TX599 & JR-599, connecting cables, monuols, £5. otl in vgc & portect w/order, £300. James, G4MKU, QTHR, tel: Lossleymouth (0343 81) 2626, after 6pm.

YAESU FT9020D, ex condx, £550. G321F, QTHR, tel: Hnddersfield 863936.

1B3 TRI-BANDER, brand new, never used, also KREDOORC rotator, brand new, still in box with eobles. Reason for sale, moving to new OTH, £350. No time wasters please! G4YLF, QTHR, tel: 0443-730492.

EX-ARMY R107 RX in w/order c/w workshop manual, 240V or 12V, 1.2-17.5MHz, reasonable offers around £15 to collectors. G6NVL.

TR3200 70cm 12ch FM, £120. Brelm 10A psu, vgc, £50 Duplexer HS-770, £10. 70cm mobile collinear & mount £10. Box el 120 xtals, offers. 70cm 21-ale Tonna, 9-ale 70cm antenna, rotator, £25. Alex, G6YU, QTHR, tel: Wymondham (0953) 604626.

FT1012D Mk3 incl lon, litted FM board, monuol, recently overhauled, £500 or would swap for FT290R multimode with nleods, chgr etc end cash

adjustment. Each pay postage. Phone Joe and have a chat, tel: 0227-455725, evenings or weekends.

COLLINS KWM380, full line-up, pristine condx, 14 months old, offers? CATT5, OTHR, tel: 0533-857652.

SATELLITE TRACKING SYSTEM, comprising T44/432 Tonna antennas, g/lire boom, KR-5400/5600 rotator long cables, phasing harness, controller and software by C4CPO for auto control by BBC B, E275. Yaeus FT726R with 2m/70cm/satellite boards, mulek pre-amps, E850. Apple 2+, 2 disc drive, monitor, over 200 programs (RTTY, mailbox, basecoi, Amptor, 55TV with STS/6 (Toni-Tune) TU & Translet printer, E675. BN05 25A psu, E90. Anton, C4SCR, OTHR, tel: 07-937 1416.

SILENT KEY SALE: Skyking rotator, E90. Mirago B108 E70. Trio 7500 2m FM, E50. KW Ezematch, E40. Osberkblock swr/pwr, E40. Subtronic frequency counter, E50. 9-ale X-Tonna with UR67, E25. FRV7700 116-760MHz tvtr, E30. Microdot GW/RTTY RX/IX, E300. Datong up-cvtr, E40. Video Genie 32k, GW TX/RX, E80. 88W monitor, 2ch, E40. Various items, mics etc, offers? Dave, C4NIP, OTHR Reading aruo, tel: 0734-733626, (24hr).

88C RTTY TERMINAL UNIT, E30. FM board for Yaeus FT707 or FT107, E55. Tm conversion kit for Tm multimode, will lit ll required for E5, lull 29-30MHz coverage, C400M, OTHR, tel: 0256-76050.

IGOM FL32 CW 11lter, 500Hz, 9MHz IF, 11lter used, removed from IC735, E27 p/p sold. C32NF, OTHR, tel: 0509-502432.

OC342, E50. BC221 with charts, E25. Command TX's, E100. Hisc pre-war valves & components, hand generator c1910-1920, offers? Cowd C111 motor, E70 C3LYP, OTHR, tel: High Wycombe 881298.

ICOM A1100 auto, near mint condx, E235 ono. Ho time waters please! Rowe, tel: Gainsborough (0427) 5266.

IR10 TW4000A, E420. R2000 RX with YG455CN CW xtal 11lter, E335. Both mint condx. Datong AD270 active antenna, E25. Buyer collects. GW61ZX, OTHR, tel: 041-339 4552, evenings.

TR10 T57805 VHF/UHF multimode, gc, sale due to HF purchase, E650 or consider exch or part exch on good quality HF rig. prel with gen/cov. WANTED: heavy duty rotator. G6ZIC, NO1 OTHR, tel: Rushden 378493.

TR10 IR8400 synthesised 70cm FM TCVR, E135. Mizuho 58-2M 2m 558 TCVR, E75. Mizuho LA2X 2m 10W linear, E20. Solertron CD5235 scope, E20. VDU-keyboard ADH3A, E125. FRG7 RK 0.5-30MHz, E120. Polyskop 400MHz, E175. Heathkit S8620 scanner, E85. C3HCD, tel: 01-455 7093.

50MHz SPECTRUM tvtr, 20W o/p, 28MHz IF, worked W/VE/LA/CI etc, E95. 4m 100W linear, MH70/100, E720 WANTED: Paper/develop for Plessey K011T fox machine or info on supplier. FT901 accessories. MH128/144. Coll winder. C3A21, OTHR, tel: 0772-37815.

ICR70 GEN/COV RX, 150kHz-30MHz, 11lter FM board, mint, manual, E425. Tandy DX302 gen/cov RX, digital readout, mains/12V, manual, E130. Sony ICF2001 gen/cov RX c/w psu, manual, E85. Mirror trolley, cont, new braked chassis, owning, spare wheel, E175. G1JTE, OTHR, tel: 01-989 3686.

TWO POCKET WATCH TYPE VOLTMETERS, offers please. Also VHF-UHF Manual, 3rd ed, E3.50. G4H1R, NOT OTHR, tel: Lanark (0555) 4420.

CLASSIC RTTY STATION, professional build in rack, chrome handles etc, Inrt 444 & manual, psu, Jack 11lter, TU, 5" CR shift monitor, 2 disk oacs, suit cTub or youth training, deal can be struck. GBLT, OTHR, tel: Tomcaster 860321.

YAESU FT480R 2m multimode, vgc, mobile mount, E275 would exch for FT290 c/w o11 accessories. Eddystone gen/cov RX 840A, ex condx, E50. Advance slg/gen SC62, E10 c/w leads. Reasonable offers considered, buyer collects. C1AFW, OTHR, tel: 0795-876447, evenings.

ICOM 751, with internal psu, speech board and keypad, unused, reason for sale - on illlult inability to pass the Morse test! Sensible offers. G8HTC, OTHR, tel: 01-868 2516.

HEATHKIT APACHE TX & Hotawk RX plus S810 unit, TX requires attn LT heater rectifier rct, RX working order, large units 6018s es but vgc appearance. All units with handbooks. Exasperated OAP owner now handicapped, offers? C3YHL, OTHR, tel: 0423-884568

UHF swr/pwr meter, Oolwa type 650, os new in original packing, E65. Coaxial reToy type CX5200, E20. Memopak 32k RAM for ZX81 computer, E5. Mutek 2m pre-amp SLXAT445, os new, E25. Burnord, tel: Hemport Pagnell (0908) 613523.

NAC 144XL 2m vofve linear, 200W FM, 250W SSB, vgc,

E350 ono. G00C0, NOT QTHR, tel: 04215-69901, anytime.

TR10 TR9000 2m multimode, vgc, E230. MHL 50W linear/pre-amp, 4 months old, E70. BN05 psu, 12V @ 6A, auto overload shutdown, E50, pau powr TCVR & linear on SSB, interested? Dave, C1HVP, tel: Creme 257578, after 6pm.

DAIWA LA2060 11linear amp, 1-3W 1/p, 60W o/p, E55. 19-ale 70cm Multisfysre beam, st111 in pkt, E25. Trlo 9000 multimode, E260. Oolwa 7500A rotator, E85. Top bearing E17. Tower, 50' tilting, E165. G4SYR, OTHR, tel: 01-554 3544.

DAI COLOUR COMPUTER, cost E550, perfect, unused, E250. 5.25" disc drives, Shuggart, E300. Pye PF70 3ch xtalld RB74/RB70/SUB, E50. Pye UHF Olympic, E70. Fax machine, working, E50. HX-80 F/T + RS232, offers? All ono. D11worth, tel: 0473-311665.

50MHz PW 'MEON' tvtr with valve 11linear E290, all psu's, cabinet, working on RX, needs aligning, lost interest, E50. Jeybeam 2m 5XV, E72. 500W trans 240-475V prl, 4x 56V sec, E15. 2off panel mounting DVM's, 3.5, 1.999V mains, E5 ea. Folded dipole 300 ohm ribbon & leader 132', E7. 8lg Parmeko trans 650/350 + LT's, E12. Doppler radar unit 10.7GHz, mains, in die-rast cases, E20. G3KPM, OTHR, tel: Camborne 717672.

NASCOM 2 Microcomputer system housed in smart computer case, fitted with HAS-SYS 3 monitor, 16k memory expandable to 64k, Nascom ROM basic, Naspen text editor & 2eap assembler in EPROM. UHF or video o/p's, serial & parallel ports, c/w Nascom Imp printer F/1 lead. Gotren 12" B&W monitor, cassette data recorder & Crystal extended basic on cassette, full documentation on all hardware & software plus other info, E790. Buyer collects. G4KLT, OTHR, tel: 0706-46428, evenings.

TR9130 2m multimode boxed accessories, E325. Sharp H280K, tapes, manual, E230. KW202 RA, apkr, manual E90. Lowe ASV-1515 2m RX, 12ch, spare xtal, 240V or 12V, E15. Can help deliver London/S.East. C4HWC, OTHR, tel: 0259-216349, Saturdays only.

TR10 R1000 RX 0-30MHz, 11lter awl & mobile use. T2V & 240V, no trouble from new, E225 ono. Also Cobro 148CT11, no mods, rx audio unlinked, 11lter 10FH always Q5, E110 ono. C4ZJY, OTHR.

YAESU FT0560 QRO HF 1CVR, E175. FV4005 v1o to match, E35. Belcom L1nr 2, E65. KOK 144MHz HF 25W mobile, E125. Sun 144MHz colinear, E25 possible exch 70cm TCVR. G1CLJ, NOT OTHR, tel: Swindon (0793) 874614.

FLUKE DIGITAL MULTIMETER model 8020A 20Hohm/V two conductance ranges AC/DC to 1000V OC and 750V AC, ex condx with case & manual, value E770 accept E85 ovno. COBLS, NOT OTHR, tel: 0527-500130 after 6pm.

KW107 SUPERMATCH otu, mint condx, E125. Rotator most clamps, E4. Mutek TVI 11lter, E2. "Secrets of Ham Radio OXing", E5. "Complete DXer" W9XNI, E5 o11 items as new. 2m mag/mount mobile antenna, E8. Witeay, tel: 0376-84478, evenings.

KW200B HF TCVR 160-70m, KW E-zee match otu, 1CVR recently serviced by KW, gc, E175 ono. GAXUT, OTHR Swindon, Wilts, tel: 0793-25662.

SK200M SCANNING RX + discone antenna, E205 ovno. Adler 120p printout type mains operated calculator working order, E10 ono. Majestic domestic radio USA origin, early 1930's, ex cabinet, suitable restoration project, offers? John, C6FRB, OTHR, tel: Worcester (0905) 421782.

TR2400 handheld, leather coso, batteries, chgr, serial etc, E135. Approx 120' UR67 50 ohm h/duty coax, new, E17. G3ZLS, OTHR, tel: Knowle 70235.

HR0 HF RX, c/w psu, o11 gen/cov coll packs, unmodded, working, buyer collects, E40 ono. Read, tel: 0734-425291, after 6pm.

ICOM 25TE multimode, mulek board, met, E450. 10m TCVR, 28-29.8MHz multimode, E170. The equipment 043 dual trace scope, mint, E55. Ron, C4ARK2, OTHR 5.Wales, tel: 0443-673000.

YAESU FT-221RD, E300. Yaeau FT102, E450. Yaeau FRG7, E90. Standard 8900 mobile, E150. Nanaon swr/pwr meter, E10. 2m 4-over-4, Hirschman rotator E30 complete. Roberts, tel: 0203-444428.

T5830M nine-band HF TCVR, ex condx, 11lter used, original packing etc, E260. G4RUR, NOT OTHR, tel: Hembury (0635) 46856.

VERSATOWER P40 less groundpost, E250 buyer collects. G4ZFM, OTHR, tel: 0224-324495, evenings.

DRACON 64k computer, rx condx & 8&W T2" TV, E70. 1elewiter word processor package on 5.25" disc c/w manual, E10. Complete set (52) of "Input" magazine, ex condx, E28 inc1 p/p. G4LTM, OTHR, tel: 061-357 1152.

EDDYSTONE 840C, beautiful as new ronds, so11 or swap for complete unmodified Marconi Atlanta vintage American combled Velve testar/multimeter, Supreme 540-A, ripe for restoration with manual, E70. Hundreds of early valves, cheap. Jim, C4XWD, tel: Kidderminster 3674, evenings.

ICOM IC2900 2m rig c/w MM 2m pre-amp, in ex condx, few hours use only, E350. Arthur, G1AVN, tel: 0242 67-5632.

## WANTED.....

HEATHKIT Q Multiplier, QPM1, QPM2, Crystal calibrator CL-T, loudspeaker SC-4. Correct mains transformer & o/p transformer for Halliencers 5X28. Also pre-war or post-war Halliencers & National RX's. Rango 2 coll for MCRT. C4HHZ, OTHR, tel: 0962-822401, daytime or 04275-68705, evening.

HEAVY DUTY ROTATOR new, old or faulty unit considered. Also Icom 11lterers FL44A, FL52A & FL45. Icom FM unit type IC-EX-242. Hustler mobile loading coil for 28MHz. Faulty quality HF gen/cov RX. G3IA, OTHR G1os, tel: Hilsden 571.

PYE Labgear Compnr 8, HF SSB 2-9MHz. G3IAG, OTHR, tel: 0638-730373.

FT790, 11linear FL7070. VHF/UHF scanner SX200N or AR2001 or similar. 20A (at least) psu, commercial or h/brew if neat and regulated, 70cm & 2m beams, must be gc. Mobile mount for FT290. Phil, C4WH0, tel: Lincoln (0522) 752563.

DRAKE R7A RX, must be in first class condx. G3HSH, OTHR, tel: Oxford (0865) 56321.

CEHERAL COVERAGE RX, ICR70/71 or similar high quality RX. G6POR, OTHR, tel: Latchworth 683109.

DRAKE MN2700. Any info on Advance Electronics slg/gen E2, loan or purchase, all costs refunded. FOR SALE: New unused Orother H1009 dot matrix printer. C30MJ, OTHR, tel: 0923-676344.

70cm LIHEAR using 2C39 valve ie EOL-432P. C60KB, OTHR, tel: 0843-827160.

T5700G or 5 or exch for TR9130. C4NEJ, OTHR, tel: Bedford 712865, after 5pm.

YAESU 70cm module for FTV700, same as FTV107R. Steve, C4STE, OTHR, tel: 0789-763855.

I NEED COMPONENTS for the K2RIW 70cm amp. SK620A bases required & any other useful bits & pieces. Complete or unfinished projects considered. Good money waiting for the right gear. Would like to hear from other constructors. Ron, C4SHC, OTHR, tel: 0706-350748.

ICOM IC2025 558/CM 2m TCVR in gmo needed. Offers to Rod McHilton, G2CKY, OTHR, tel: 01-445 2508.

CUSHCRAFT R3 ANTENNA. Also following ex Army equipment: psu for WS22 any condx high power & standard vario for WS19, WS21, WS48 & WS62. Horliss, C4GEN, OTHR, tel: 082571-2205.

HANDLE & FRONT ENOPLATES & lull manual for Solartron A700 scope, good price paid or loan mo your manual for photocopy & expenses returned. Also want good scope leads x1, x10, x100 11 cheap. G6HMG, OTHR, tel: 057-430 9167.

TR10 T54305, gc. C6JN5, tel: 0905-62004T, anytime.

PAIR 8T3 VALVES, new condx or good please. Reasonable price paid. G3AHR, OTHR, tel: 0333-311770.

AR30 ROTATOR CONTROL BOX, with buy complete. rotator 11 sensibly priced. Also wanted, Jeybeam 18T, G4HAT OOD prel roving 40/80. Also gc gde Alcat etc. Terry, tel: 0634-64962.

YAESU FTV901R tvtr with at least 2m moduto, will sell or part exch my FV901 v1o. G3VYP, OTHR, near Ludlow (Yorpole), tel: 056 885 296.

EXCHANGE FT790R multimode TCVR c/w cer mountings (also 11t FT290), chgr etc, for Icom IGD4E. G6ORJ, OTHR, tel: 044 482-617.

TR10 SPEAKER UNIT for T5930. G3A05, 3 Church View, Sutton Lone Eed, near Macclefield, 5K11 QOT, tel: 02605-2764.

FV901DM, must be in gc and et a reasonable cost. GTHOH, tel: 05436-75307, after 6.30pm.

YAESU FRA7700 ACTIVE ANTENNA, must be in gc. Also Yaeus FRC8800 RX. FOR SALE: Trio R2000 with VC10

cvtr, £425. Wood, tel: Clochen 378.

ANY OLD CHEAP COMPUTER, eg ZX81, VIC20, working or not. G1FEF, NOT QTHR, tel: 06285-26003.

PAIR S87 BLY TRANSISTORS. G03FXH, QTHR, tel: (Day) 0624-75646 or (evenings) 0624-851737.

ANY INFORMATION regarding the Quasar 720 25W/1W marine VHF ICVR (cct diagram, repair manuals etc) to photocopy or buy. Any help gratefully received. Joe, CGKPH, NOT QTHR, 92 Manor Abbey Road, Halesowen, West Midlands, B62 0AA.

XTALS, glass encapsulated, fundamental holder HC6U

3.5MHz to 3.8MHz. G31PV, QTHR.

INFORMATION REQUIRED on valve voltmeter, Furzehill Laboratories type 3788/2, handbook, service manual anything appreciated, will purchase or pay copying costs. Also required, Bencher paddle, G3EAD, QTHR, tel: 0932-228722.

OSCILLOSCOPE, type Scopex 456, 4010 or similar in gc. G3GC, QTHR, tel: Yeovil (09351) 75533.

SP120 MATCHING EX/SPKR for FT221R, good price paid and costs. Nixon, tel: 01-980 3283, after 6pm.

SPEAKER UNIT with audio filter: Yaesu SP901P,

SP980, SP102, Trio SP230, SP930, G2FXS, QTHR, tel: 0632-572852.

EM: M426 oscilloscope manual for purchase or copying. G4ZTS, QTHR, tel: Stafford (0785) 664667.

MARCONI MERCURY T017 RX. Also Heath RAT RX & Cedar 250/5 (AT5) pwr units plus vintage Eddystone and Raymart plug-in coils. Write with price & condx to Harris, 35 Kingswood House, Farnham Road, Stough, Berks, SL2 10A.

TELEFUNKEN AZ11 valve for MW2 RX. G1EAD, QTHR, tel: 0579-43233, (work).

## Conditions of Acceptance

The RSCB reserves the right to refuse advertisements and accepts no responsibility for errors or omissions, or for the quality of goods offered for sale. Advertisements for citizens' band equipment will not be accepted. Refunds will be sent for any advertisement which are rejected for any reason.

**WARNING:** Members are advised that they should, as far as possible, ensure that the equipment they intend to purchase is not subject to a current hire purchase agreement. The "purchase" of goods legally owned by a finance company could result in the "purchaser" losing both the goods and the cash paid.

**RATES:** The current rate for Members' Ads is £2.30 (incl VAT) for 40 words or less. An additional cost of £2.30 is incurred for every additional 40 words or less. Each advertisement must be accompanied by the correct remittance, either as a cheque or

postal order made payable to 'Radio Society of Great Britain'. When writing out advertisements, please ensure that you do not enter more than one word in each 'box' on the form. It is advisable to read some of the advertisements contained on these pages and familiarise yourself with the house style. Equipment type numbers, telephone numbers and certain abbreviations will count as one word. It may be necessary to edit certain advertisements in order for them to comply with the conditions of acceptance.

The following abbreviations are in common use for Members' Ads:-

TX - Transmitter RX - Receiver  
ICVR - Transceiver  
TVTR - Transverter CVTR - Converter  
gen/cov - general coverage  
sig/gen - signal generator  
vgc - very good condition  
gc - good condition  
ex - excellent condx - condition  
c/w - complete with


Post to: MEMBERS' ADS, RSCB, LAMBDA HOUSE, CRANBORNE ROAD, POTTERS BAR, HERTFORDSHIRE, EN6 3JW.  
DO NOT POST TO THE ADVERTISING OFFICER

Price £4.89 including p & p

£5.75 to non-members

Members' price only £3.83

to personal callers

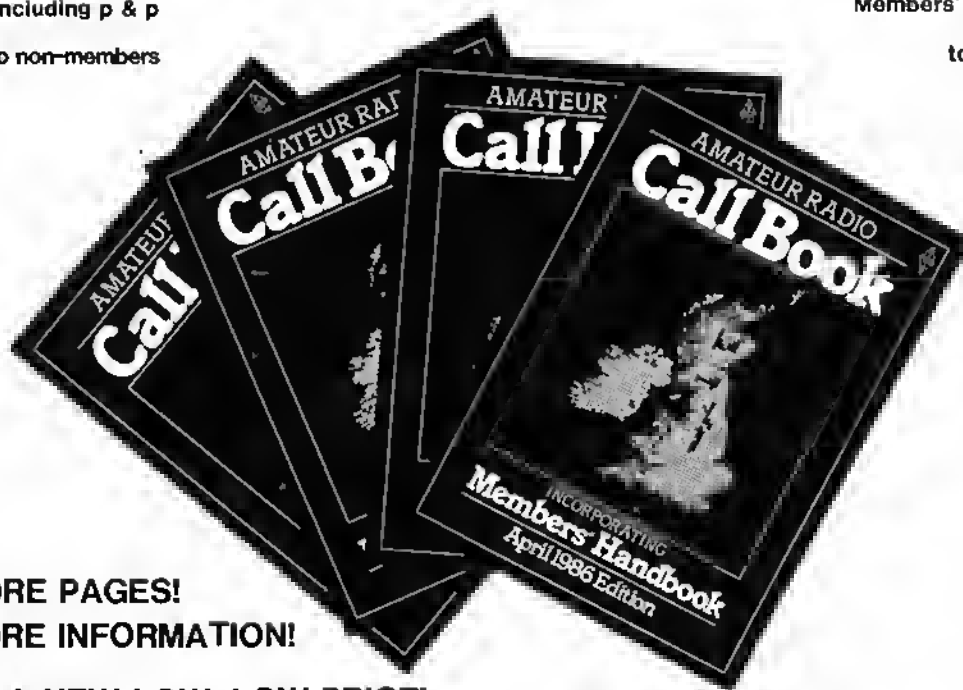

**MORE PAGES!  
MORE INFORMATION!**

**AT A NEW LOW, LOW PRICE!**

**RSCB AMATEUR RADIO CALL BOOK**

**(incorporating the new MEMBERS' HANDBOOK)  
OUT NOW!**

# DEWSBURY



# ELECTRONICS

## NEW

## NEW



### THE NEW STAR MASTERKEY ELECTRONIC CMOS MEMORY KEYS

Following the outstanding success story of the Dewsbury Electronics' STAR-MASTERKEY with over 500 units in use world wide, by amateurs, and at sea by professional operators, many users requested memory facilities at a reasonable price. So here it is. The STAR-MASTERKEY CMOS Memory Keyer.

- \* Features full iambic keying.
- \* Eight 50-character memories
- \* Automatic Repeat on one memory (CQ calls etc.).
- \* Memory retention for battery life.
- \* Ultra low current drain.
- \* Uses four AA size cells.
- \* Switchable Auto-character Spacing.
- \* Dash & dot memories
- \* Compact 3" high, 6" wide, 7" deep.
- \* Direct & grid block keying sockets for both solid state & valved PAs.
- \* Switchable Sidetone Oscillator with loudspeaker & headphone socket.
- \* Loads memory from paddle "OFF AIR".
- \* Speed & weight controls.
- \* Adjustable sidetone pitch & volume.
- \* Comes complete with batteries.
- \* BRITISH BUILT & FULLY GUARANTEED.

Price £95.00. Post, packing and insurance £3.00.  
VIBROPLEX, HI-MOUND & BENCHER KEYS AVAILABLE.

FULL RANGE OF TRIO PRODUCTS STOCKED  
We are also stockists of DAIWA—NIET ANTENNAS—MUTEK—WOOD & DOUGLAS—TASCO TELEREADERS—  
MICROWAVE MODULES—ICS AMTOR—AEA PRODUCTS—DRAE

**Dewsbury Electronics, 176 Lower High Street, Stourbridge, West Midlands.**  
**Telephone: Stourbridge (0384) 390063/371228.**

**Telex: 337675 TELPES G**

Instant finance available subject to status. Written details on request.



# YAESU

**NEW  
MOBILES**



## 2M & 70cm FULL DUPLEX FT2700RH

The FT2700R, virtually two transceivers in one case, is designed to be the ultimate in convenience, for FM mobile or base station operation, on the 144 and 430MHz bands. Using Yaesu's new one piece die-cast aluminium chassis concept, the FT2700R provides 25 Watts continuous output on either band, for full duplex (or simplex!) operation whilst obtaining optimum circuit shielding and efficient heat dissipation.

### SCANNING

Two 4-bit CPU's provide convenient control together with simple operation of the dual VFO's, 10 channel memory with back up and two calling frequencies.

Dual, receiver front ends, local synthesisers, IF's and transmitter RF stages make this the first mobile transceiver capable of *true* full duplex cross-band operation.

### PRIORITY

Comprehensive scanning features include "PMS" (programmable memory scan) which permits continuous or skip-scanning between two memory channels in the same band. A MHz 'stepping' switch is fitted for quick transition from one band to another. Priority channel monitoring is available whilst on the same or another band.

### CROSS BAND

Independently programmable transmit and receive frequencies, standard repeater shifts (with reverse facility), offers total freedom of operation.

### READOUT

The large green back-lit dimmable LCD offers an aesthetically pleasing and easy to read display of the complete operating status of the transceiver, including memory and reverse repeater indications at a glance. The PO/S meter incorporated in the main display is a distinctive graphical two colour type. (Optional Voice Synthesiser available, see FT270R/RH text.)

### GENERAL SPECIFICATIONS

|             |                       |             |                    |
|-------------|-----------------------|-------------|--------------------|
| Mode        | FM IF3, G3E)          | Antenna     | 50ohms, unbalanced |
| Supply      | 13.8V ± 15%           | Modulation  | Variable reactance |
| Circuit     | Double Conversion     | Deviation   | ± 5KHz             |
|             | 21.6MHz, 455KHz       | Tone Burst  | 1.750KHz           |
| Sensitivity | 0.2µV @ 12dB Sinad    | Spurious    | -60dB (or better)  |
|             | 1.0µV @ 30dB Sinad    | Maximum BW  | 16KHz              |
| Selectivity | 14KHz - 6dB           | Microphone  | 600ohms, nominal   |
|             | 28KHz - 60dB          | Temperature | 10°C + 60°C        |
| Image       | 60dB (or better)      |             |                    |
| Audio       | 4 to 16ohms           |             |                    |
|             | 2W in 8ohms (10% THD) |             |                    |

### OPTIONS

FVS-1, MF-1B3B, SP55, YH1, S810

The FT270RH is constructed on a unique massive diecast aluminium ducted heatsink which enables significantly larger output powers to be obtained from a transceiver substantially smaller than any similar radio to date. The FT270RH, with fan assisted cooling provides 45W RF output. It is also fitted with a 'low power switch' which provides around 10% of full output.

### DISPLAY

The FT270RH uses a high visibility back-lit LCD, with large 5mm digits, providing a readout of frequency and all important transceiver functions. Pleasant green illumination and newly developed wide angle LCD ensure easy visibility day or night from most angles.

### MICROPROCESSORS

The dual 4-bit microprocessors of the FT270RH provides maximum ease of use combined with an extremely wide range of operating functions. Dual VFO's, ten memories and programmable band scan limits are all easily selectable from the front panel.

### MEMORIES

The FT270RH can memorise a number of scanning parameters for maximising performance. Upper and lower limits may be set (for quick scanning of the band). The ten memories may be scanned for a busy channel or for monitoring a priority channel. The scanning can be either manually or carrier controlled.

### VOICE SYNTHESISER

For easier and safer 'eyes on the road' mobile operation an optional voice synthesiser (FVS-1) is available to give an audible indication of frequency, memory channels and VFO selections at the touch of a convenient microphone mounted button. The FVS-1 is of course ideal for those with impaired vision.



## 45 WATTS OUTPUT FT270RH

### FT2700RH

|                                 |   |
|---------------------------------|---|
| Frequency                       | 144-146MHz<br>430-440MHz                        |
| Power out                       | 2m 25/3W<br>70cm 25/3W                          |
| Supply                          | 7A (25W Tx)<br>3A (3W Tx)<br>0.6A (5q Rx)       |
| Stability                       | 2M ± 10ppm, -5 + 50°C<br>70cm ± 5ppm, -5 + 50°C |
| DIMENSIONS (Ex/Inc Projections) | 150W, 50H, 130/1850 mm, 1.6Kg                   |

### FT270RH

|           |                                   |
|-----------|-----------------------------------|
| Frequency | 144-146MHz                        |
| Power out | RH: 45W/5W                        |
| Supply    | RH: 9A/3.5A Tx<br>0.6A (5q Rx) RH |
| Stability | ± 10ppm (-5 + 50°C)               |

DIMENSIONS (Ex/Inc Projections)  
140W, 40H, 143/1750 mm, 1.25Kg



**South Midlands  
Communications Ltd.**  
Rumbridge Street  
Totton, Southampton  
Hants SO4 4DP

**YAESU MUSENS  
ONLY AUTHORISED  
DISTRIBUTORS**

**AMATEUR  
ELECTRONICS AE LIMITED**  
510-512 Alum Rock Road  
Alum Rock  
Birmingham B8 3HX

